

Article No. : 1FL2310-6AC11-1SB0



Client order no. :
Order no. :
Offer no. :
Remarks :

Item no. :
Consignment no. :
Project :

Basic motor data

Motor type	Permanent-magnet synchronous motor
Motor type	High Inertia
Static torque	35.20 Nm
Static current	13.20 A
Maximum torque	90.00 Nm
Maximum current	35.60 A
Maximum speed	2,100 rpm
Rotor moment of inertia	134.2920 kgcm ²
Weight	37.90 kg

Rated data

SINAMICS S200, 3 AC 380 ... 480 V

Rated speed	2,000 rpm
Rated torque	33.40 Nm
Rated current	13.20 A
Rated power	7.00 kW

Encoder system


Encoder system Absolute encoder singleturn 21 bit

Motor connection

Connection type Metal angular connector

Mechanical data

Design acc. to Code I	IM B5 (IM V1, IM V3)
Vibration severity grade	Grade A
Shaft height	90
Flange size (AB)	180 mm
Centering ring (N)	114.3 mm
Hole circle (M)	200 mm
Screw-on hole (S)	13.5 mm
Overall length (LB)	359 mm
Diameter of shaft (D)	35 mm
Length of shaft (E)	80 mm
Length of flange diagonal (P)	228 mm
Shaft end	Shaft with parallel key (half-key balancing)
Color of the housing	Anthracite RAL 7016

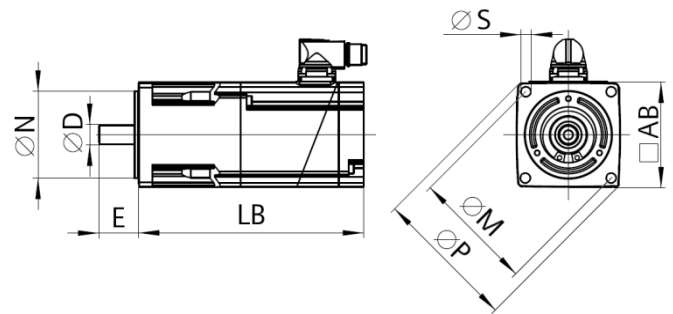

Holding brake

Rated voltage	24 V DC 10 %
Rated current	1.90 A
Holding torque M_{4Br}	30.00 Nm
Opening time	220 ms
Closing time	115 ms