



SENTRON, cylindrical fuse link, Class CC, 0.6 A, time-lag, Un AC: 600 V, respect national installation rules! for protection of control transformers, reactors and selenoids

Figure similar

| Model | |
|--|--------------------------|
| product brand name | SENTRON |
| product designation | Cylindrical fuse link |
| General technical data | |
| operating class of the fuse link | Slow |
| type of voltage of the operating voltage | AC |
| Main circuit | |
| operational current rated value | 1 A |
| Product details | |
| product component striker | No |
| Mechanical Design | |
| mounting position | Any, preferably vertical |
| Net Weight | 8 g |
| Approvals Certificates | |
| General Product Approval | other |




[Confirmation](#)

Environment

[Environmental Confirmations](#)

Further information

- Information on the packaging <https://support.industry.siemens.com/cs/ww/en/view/109813875>
- Information for data generation and storage <https://support.industry.siemens.com/cs/ww/en/view/109995012>
- Information- and Downloadcenter (Catalogs, Brochures,...) <https://www.siemens.com/lowvoltage/catalogs>
- Industry Mall (Online ordering system) <https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3NW1006-0HG>
- Service&Support (Manuals, Certificates, Characteristics, FAQs,...) <https://support.industry.siemens.com/cs/ww/en/ps/3NW1006-0HG>
- Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...) https://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3NW1006-0HG

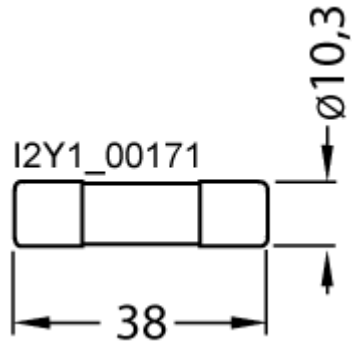

last modified:

4/11/2025 

