



Load feeder fuseless, Reversing duty 400 V AC, Size S00 1.40...2.00 A 24 V DC  
Spring-type terminal for 60 mm busbar systems (also fulfills type of coordination 1)  
Type of coordination 2, I<sub>q</sub> = 150 kA 1 NC (contactor)

|   |   |
|---|---|
| <b>product brand name</b>   | SIRIUS  |
| <b>product designation</b>  | Reversing starter   |
| <b>design of the product</b>  | for 60 mm busbars   |
| <b>product type designation</b>   | 3RA22   |
| <b>manufacturer's article number</b>  |   |
| <ul style="list-style-type: none"> <li>• of the supplied contactor</li> <li>• of the supplied circuit-breakers</li> <li>• of the supplied RS assembly kit</li> <li>• of the supplied link module</li> </ul> | <a href="#">3RT2015-2BB42</a><br><a href="#">3RV2011-1BA20</a><br><a href="#">3RA2913-1DB2</a><br><a href="#">3RA2911-2AA00</a> |
| <b>General technical data</b>   |   |
| <b>size of the circuit-breaker</b>  | S00   |
| <b>size of load feeder</b>  | S00   |
| <b>power loss [W] for rated value of the current</b>  |   |
| <ul style="list-style-type: none"> <li>• at AC in hot operating state per pole</li> <li>• without load current share typical</li> </ul>   | 2.6 W<br>4 W  |
| insulation voltage with degree of pollution 3 at AC rated value   | 690 V   |
| <b>surge voltage resistance rated value</b>   | 6 kV  |
| <b>degree of protection NEMA rating</b>   | other   |
| <b>shock resistance according to IEC 60068-2-27</b>   | 6g / 11 ms  |
| mechanical service life (operating cycles) of contactor typical   | 30 000 000  |
| <b>type of coordination</b>   | 2   |
| <b>reference code according to IEC 81346-2:2019</b>   | Q   |
| <b>Substance Prohibitance (Date)</b>  | 10/01/2009  |
| <b>SVHC substance name</b>  | Lead - 7439-92-1  |
| <b>Weight</b>   | 1.963 kg  |
| <b>Ambient conditions</b>   |   |
| <b>ambient temperature</b>  |   |
| <ul style="list-style-type: none"> <li>• during operation</li> <li>• during storage</li> <li>• during transport</li> </ul>  | -20 ... +60 °C<br>-50 ... +80 °C<br>-50 ... +80 °C  |
| <b>temperature compensation</b>   | -20 ... +60 °C  |
| relative humidity during operation  | 10 ... 95 %   |
| <b>Main circuit</b>   |   |
| <b>number of poles for main current circuit</b>   | 3   |
| <b>design of the switching contact</b>  | electromechanical   |
| <b>adjustable current response value current of the current-dependent overload release</b>  | 1.4 ... 2 A   |
| <b>operating voltage</b>  |   |
| <ul style="list-style-type: none"> <li>• rated value</li> <li>• at AC-3 rated value maximum</li> </ul>  | 690 V<br>690 V  |

|  |  |
|--|--|
| <ul style="list-style-type: none"> <li>at AC-3e rated value maximum</li> </ul>   | 690 V                                    |
| <b>operating frequency rated value</b>   | 50 ... 60 Hz                             |
| <b>operational current</b>   |  |
| <ul style="list-style-type: none"> <li>at AC-3 at 400 V rated value</li> </ul>   | 2 A                                      |
| <ul style="list-style-type: none"> <li>at AC-3e at 400 V rated value</li> </ul>  | 2 A                                      |
| <b>operating power</b>   |  |
| <ul style="list-style-type: none"> <li>at AC-3 <ul style="list-style-type: none"> <li>at 400 V rated value</li> </ul> </li> </ul>  | 750 W                                    |
| <ul style="list-style-type: none"> <li>at AC-3e <ul style="list-style-type: none"> <li>at 400 V rated value</li> </ul> </li> </ul>   | 750 W                                    |
| <b>Control circuit/ Control</b>  |  |
| <b>type of voltage of the control supply voltage</b>   | DC                                       |
| <b>control supply voltage at DC rated value</b>  | 24 V                                     |
| <b>holding power of magnet coil at DC</b>  | 4 W                                      |
| <b>Auxiliary circuit</b>   |  |
| <b>product extension auxiliary switch</b>  | Yes                                      |
| <b>Protective and monitoring functions</b>   |  |
| <b>trip class</b>  | CLASS 10                                 |
| <b>design of the overload release</b>  | thermal (bimetallic)                     |
| response value current of instantaneous short-circuit trip unit  | 26 A                                     |
| <b>UL/CSA ratings</b>  |  |
| <b>full-load current (FLA) for 3-phase AC motor</b>  |  |
| <ul style="list-style-type: none"> <li>at 480 V rated value</li> </ul>   | 2 A                                      |
| <ul style="list-style-type: none"> <li>at 600 V rated value</li> </ul>   | 2 A                                      |
| <b>yielded mechanical performance [hp]</b>   |  |
| <ul style="list-style-type: none"> <li>for single-phase AC motor <ul style="list-style-type: none"> <li>at 230 V rated value</li> </ul> </li> </ul>  | 0.16 hp                                  |
| <ul style="list-style-type: none"> <li>for 3-phase AC motor <ul style="list-style-type: none"> <li>at 220/230 V rated value</li> </ul> </li> </ul>   | 0.5 hp                                   |
| <ul style="list-style-type: none"> <li>at 460/480 V rated value</li> </ul>   | 1 hp                                     |
| <ul style="list-style-type: none"> <li>at 575/600 V rated value</li> </ul>   | 1.5 hp                                   |
| <b>Short-circuit protection</b>  |  |
| <b>product function short circuit protection</b>   | Yes                                      |
| <b>design of the short-circuit trip</b>  | magnetic                                 |
| <b>conditional short-circuit current (I<sub>q</sub>)</b>   |  |
| <ul style="list-style-type: none"> <li>at 400 V according to IEC 60947-4-1 rated value</li> </ul>  | 150 000 A                                |
| <b>Installation/ mounting/ dimensions</b>  |  |
| <b>mounting position</b>   | vertical                                 |
| <b>fastening method</b>  | for snapping onto 60 mm busbar systems   |
| <b>height</b>  | 260 mm                                   |
| <b>width</b>   | 90 mm                                    |
| <b>depth</b>   | 155 mm                                   |
| <b>required spacing</b>  |  |
| <ul style="list-style-type: none"> <li>for grounded parts <ul style="list-style-type: none"> <li>forwards</li> <li>backwards</li> <li>upwards</li> <li>at the side</li> <li>downwards</li> </ul> </li> </ul> | 32 mm<br>0 mm<br>50 mm<br>10 mm<br>10 mm |
| <ul style="list-style-type: none"> <li>for live parts <ul style="list-style-type: none"> <li>forwards</li> <li>backwards</li> <li>upwards</li> <li>downwards</li> <li>at the side</li> </ul> </li> </ul>     | 32 mm<br>0 mm<br>50 mm<br>10 mm<br>10 mm |
| <b>Connections/ Terminals</b>  |  |
| <b>type of electrical connection</b>   |  |
| <ul style="list-style-type: none"> <li>for main current circuit</li> </ul>   | spring-loaded terminals                  |
| <ul style="list-style-type: none"> <li>for auxiliary and control circuit</li> </ul>  | spring-loaded terminals                  |
| <b>Safety related data</b>   |  |

|   |  |
|---|--|
| product function suitable for safety function               | Yes  |
| <b>Electrical Safety</b>                                    |  |
| <b>touch protection on the front according to IEC 60529</b> | finger-safe, for vertical contact from the front |
| <b>Communication/ Protocol</b>                              |  |
| <b>protocol is supported</b>                                |  |
| • PROFINET IO protocol                                      | No   |
| • PROFIsafe protocol  | No   |
| protocol is supported AS-Interface protocol                 | No   |

|                                 |                                       |                          |
|---------------------------------|---------------------------------------|--------------------------|
| <b>Approvals Certificates</b>   |                                       |                          |
| <b>General Product Approval</b> | <b>For use in hazardous locations</b> | <b>Test Certificates</b> |



[Type Test Certificates/Test Report](#)

|                          |                             |
|--------------------------|-----------------------------|
| <b>Test Certificates</b> | <b>Maritime application</b> |
|--------------------------|-----------------------------|

[Special Test Certificate](#)



|                             |              |                |                        |
|-----------------------------|--------------|----------------|------------------------|
| <b>Maritime application</b> | <b>other</b> | <b>Railway</b> | <b>Dangerous goods</b> |
|-----------------------------|--------------|----------------|------------------------|



[Confirmation](#)

[Special Test Certificate](#)

[Transport Information](#)

|                    |
|--------------------|
| <b>Environment</b> |
|--------------------|

[Environmental Conformations](#)

|                            |
|----------------------------|
| <b>Further information</b> |
|----------------------------|

**Information on the packaging**

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

**Information for data generation and storage**

<https://support.industry.siemens.com/cs/ww/en/view/109995012>

**Information- and Downloadcenter (Catalogs, Brochures,...)**

<https://www.siemens.com/ic10>

**Industry Mall (Online ordering system)**

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RA2210-1BH15-2BB4>

**Cax online generator**

<https://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RA2210-1BH15-2BB4>

**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**

<https://support.industry.siemens.com/cs/ww/en/ps/3RA2210-1BH15-2BB4>

**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)**


[https://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3RA2210-1BH15-2BB4&lang=en](https://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RA2210-1BH15-2BB4&lang=en)

**Characteristic: Tripping characteristics, I<sup>2</sup>t, Let-through current**

<https://support.industry.siemens.com/cs/ww/en/ps/3RA2210-1BH15-2BB4/char>

**Further characteristics (e.g. electrical endurance, switching frequency)**

<https://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RA2210-1BH15-2BB4&objecttype=14&gridview=view1>

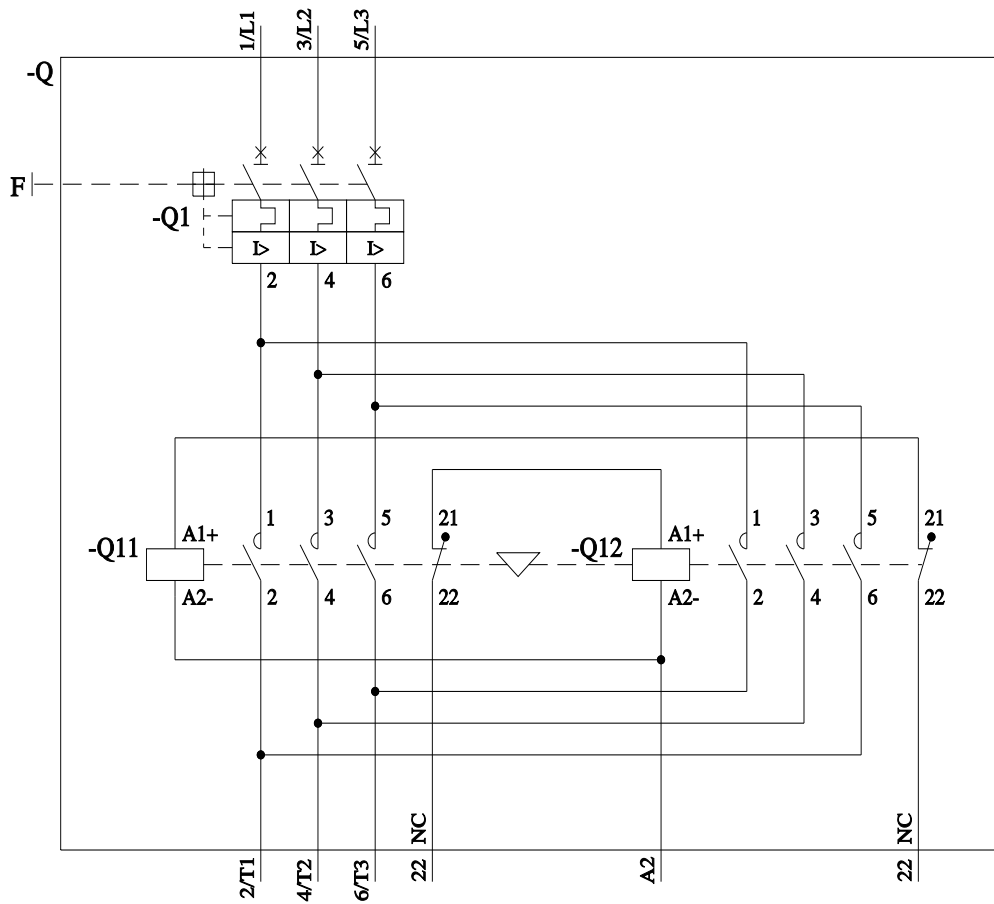

last modified:

4/1/2025