



contactor relay railway, 2 NO + 1 NC, 110 V DC, 0.7-1.25\*Us, with integrated suppressor diode, screw terminal, frame size S00, DIN-rail mounting optimized for transport (20 G)

|   |                        |
|---|------------------------|
| <b>product brand name</b>   | SIRIUS                 |
| <b>product type designation</b>   | 3RH2                   |
| <b>General technical data</b>   |                        |
| <b>size of contactor</b>  | S00                    |
| product extension auxiliary switch  | Yes                    |
| power loss [W] for rated value of the current without load current share typical      | 2.8 W                  |
| insulation voltage with degree of pollution 3 at AC rated value                       | 690 V                  |
| <b>surge voltage resistance rated value</b>   | 6 kV                   |
| <b>shock resistance at rectangular impulse</b>  |                        |
| • at DC   | 10g / 5 ms, 5g / 10 ms |
| <b>shock resistance with sine pulse</b>   |                        |
| • at DC   | 15g / 5 ms, 8g / 10 ms |
| <b>mechanical service life (operating cycles)</b>                                     |                        |
| • of contactor typical  | 30 000 000             |
| • of the contactor with added electronically optimized auxiliary switch block typical | 5 000 000              |
| • of the contactor with added auxiliary switch block typical                          | 10 000 000             |
| <b>reference code according to IEC 81346-2</b>  | K                      |
| <b>Substance Prohibition (Date)</b>   | 10/01/2009             |
| <b>SVHC substance name</b>  | Lead - 7439-92-1       |
| <b>Weight</b>   | 0.3 kg                 |
| <b>Ambient conditions</b>   |                        |
| installation altitude at height above sea level maximum                               | 2 000 m                |
| <b>ambient temperature</b>  |                        |
| • during operation  | -40 ... +70 °C         |
| • during storage  | -55 ... +80 °C         |
| <b>relative humidity minimum</b>  | 10 %                   |
| <b>relative humidity at 55 °C according to IEC 60068-2-30 maximum</b>                 | 95 %                   |
| <b>Environmental footprint</b>  |                        |
| Environmental Product Declaration (EPD)   | Yes                    |
| global warming potential [CO2 eq] total   | 133 kg                 |
| global warming potential [CO2 eq] during manufacturing                                | 1.3 kg                 |
| global warming potential [CO2 eq] during operation                                    | 132 kg                 |
| global warming potential [CO2 eq] after end of life                                   | -0.227 kg              |
| <b>Main circuit</b>   |                        |
| <b>no-load switching frequency</b>  |                        |
| • at AC   | 10 000 1/h             |
| • at DC   | 10 000 1/h             |
| <b>Control circuit/ Control</b>   |                        |

|   |                  |
|---|------------------|
| <b>type of voltage of the control supply voltage</b>                                  | DC               |
| <b>control supply voltage at DC rated value</b>                                       | 110 V            |
| <b>operating range factor control supply voltage rated value of magnet coil at DC</b> |                  |
| • initial value   | 0.7              |
| • full-scale value  | 1.25             |
| <b>design of the surge suppressor</b>   | suppressor diode |
| <b>closing power of magnet coil at DC</b>   | 13 W             |
| <b>holding power of magnet coil at DC</b>   | 4 W              |
| <b>closing delay</b>  |                  |
| • at DC   | 25 ... 130 ms    |
| <b>opening delay</b>  |                  |
| • at DC   | 7 ... 20 ms      |
| <b>arcing time</b>  | 10 ... 15 ms     |
| <b>Auxiliary circuit</b>  |                  |
| <b>number of NC contacts for auxiliary contacts</b>                                   | 1                |
| • instantaneous contact   | 1                |
| <b>number of NO contacts for auxiliary contacts</b>                                   | 2                |
| • instantaneous contact   | 2                |
| <b>identification number and letter for switching elements</b>                        | 22 E             |
| <b>operational current at AC-12 maximum</b>   | 10 A             |
| <b>operational current at AC-15</b>   |                  |
| • at 230 V rated value  | 10 A             |
| • at 400 V rated value  | 3 A              |
| • at 500 V rated value  | 2 A              |
| • at 690 V rated value  | 1 A              |
| <b>operational current at 1 current path at DC-12</b>                                 |                  |
| • at 24 V rated value   | 10 A             |
| • at 110 V rated value  | 3 A              |
| • at 220 V rated value  | 1 A              |
| • at 440 V rated value  | 0.3 A            |
| • at 600 V rated value  | 0.15 A           |
| <b>operational current with 2 current paths in series at DC-12</b>                    |                  |
| • at 24 V rated value   | 10 A             |
| • at 60 V rated value   | 10 A             |
| • at 110 V rated value  | 4 A              |
| • at 220 V rated value  | 2 A              |
| • at 440 V rated value  | 1.3 A            |
| • at 600 V rated value  | 0.65 A           |
| <b>operational current with 3 current paths in series at DC-12</b>                    |                  |
| • at 24 V rated value   | 10 A             |
| • at 60 V rated value   | 10 A             |
| • at 110 V rated value  | 10 A             |
| • at 220 V rated value  | 3.6 A            |
| • at 440 V rated value  | 2.5 A            |
| • at 600 V rated value  | 1.8 A            |
| <b>operating frequency at DC-12 maximum</b>   | 1 000 1/h        |
| <b>operational current at 1 current path at DC-13</b>                                 |                  |
| • at 24 V rated value   | 10 A             |
| • at 110 V rated value  | 1 A              |
| • at 220 V rated value  | 0.3 A            |
| • at 440 V rated value  | 0.14 A           |
| • at 600 V rated value  | 0.1 A            |
| <b>operational current with 2 current paths in series at DC-13</b>                    |                  |
| • at 24 V rated value   | 10 A             |
| • at 60 V rated value   | 3.5 A            |
| • at 110 V rated value  | 1.3 A            |
| • at 220 V rated value  | 0.9 A            |
| • at 440 V rated value  | 0.2 A            |
| • at 600 V rated value  | 0.1 A            |
| <b>operational current with 3 current paths in series at DC-13</b>                    |                  |

|   |   |
|---|---|
| <ul style="list-style-type: none"> <li>• at 24 V rated value</li> <li>• at 60 V rated value</li> <li>• at 110 V rated value</li> <li>• at 220 V rated value</li> <li>• at 440 V rated value</li> <li>• at 600 V rated value</li> </ul>  | 10 A<br>4.7 A<br>3 A<br>1.2 A<br>0.5 A<br>0.26 A  |
| <b>operating frequency at DC-13 maximum</b>   | 1 000 1/h   |
| <b>contact reliability of auxiliary contacts</b>  | 1 faulty switching per 100 million (17 V, 1 mA)   |
| <b>UL/CSA ratings</b>   |   |
| <b>contact rating of auxiliary contacts according to UL</b>   | A600 / Q600   |
| <b>Short-circuit protection</b>   |   |
| design of the miniature circuit breaker for short-circuit protection of the auxiliary circuit up to 230 V   | C characteristic: 10 A; 0.4 kA  |
| design of the fuse link for short-circuit protection of the auxiliary switch required   | gG: 10 A (690 V, 1 kA)  |
| <b>Installation/ mounting/ dimensions</b>   |   |
| <b>mounting position</b>  | +/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface  |
| fastening method side-by-side mounting  | Yes   |
| <b>fastening method</b>   | screw and snap-on mounting onto 35 mm DIN rail  |
| <b>height</b>   | 57.5 mm   |
| <b>width</b>  | 45 mm   |
| <b>depth</b>  | 117 mm  |
| <b>required spacing</b>   |   |
| <ul style="list-style-type: none"> <li>• with side-by-side mounting               <ul style="list-style-type: none"> <li>— forwards</li> <li>— upwards</li> <li>— downwards</li> <li>— at the side</li> </ul> </li> <li>• for grounded parts               <ul style="list-style-type: none"> <li>— forwards</li> <li>— upwards</li> <li>— at the side</li> <li>— downwards</li> </ul> </li> <li>• for live parts               <ul style="list-style-type: none"> <li>— forwards</li> <li>— upwards</li> <li>— downwards</li> <li>— at the side</li> </ul> </li> </ul> | 10 mm<br>10 mm<br>10 mm<br>0 mm<br><br>10 mm<br>10 mm<br>6 mm<br>10 mm<br><br>10 mm<br>10 mm<br>10 mm<br>6 mm   |
| <b>Connections/ Terminals</b>   |   |
| type of electrical connection for auxiliary and control circuit   | screw-type terminals  |
| <b>connectable conductor cross-section for auxiliary contacts</b>   |   |
| <ul style="list-style-type: none"> <li>• solid or stranded</li> <li>• finely stranded with core end processing</li> </ul>   | 0.5 ... 4 mm <sup>2</sup><br>0.5 ... 2.5 mm <sup>2</sup>  |
| <b>type of connectable conductor cross-sections</b>   |   |
| <ul style="list-style-type: none"> <li>• for auxiliary contacts               <ul style="list-style-type: none"> <li>— solid or stranded</li> <li>— finely stranded with core end processing</li> </ul> </li> <li>• for AWG cables for auxiliary contacts</li> </ul>  | 2x (0.5 ... 1.5 mm <sup>2</sup> ), 2x (0.75 ... 2.5 mm <sup>2</sup> ), 2x 4 mm <sup>2</sup><br>2x (0.5 ... 1.5 mm <sup>2</sup> ), 2x (0.75 ... 2.5 mm <sup>2</sup> )<br>2x (20 ... 16), 2x (18 ... 14), 2x 12 |
| <b>AWG number as coded connectable conductor cross section for auxiliary contacts</b>   | 20 ... 12   |
| <b>Safety related data</b>  |   |
| product function positively driven operation according to IEC 60947-5-1   | Yes   |
| <b>proportion of dangerous failures</b>   |   |
| <ul style="list-style-type: none"> <li>• with low demand rate according to SN 31920</li> <li>• with high demand rate according to SN 31920</li> </ul>   | 40 %<br>73 %  |
| <b>B10 value with high demand rate according to SN 31920</b>  | 1 000 000; With 0.3 x le  |
| <b>failure rate [FIT] with low demand rate according to SN 31920</b>  | 100 FIT   |
| <b>IEC 61508</b>  |   |
| <b>T1 value</b>   |   |

• for proof test interval or service life according to IEC 61508

20 a

**Electrical Safety**

protection class IP on the front according to IEC 60529

IP20

touch protection on the front according to IEC 60529

finger-safe, for vertical contact from the front

**Approvals Certificates**

**General Product Approval**



KC



**General Product Approval**

**EMV**

**Functional Safety**

**Test Certificates**

**Maritime application**



[Type Examination Certificate](#)

[Type Test Certificates/Test Report](#)

[Special Test Certificate](#)



**Maritime application**



**other**

**Railway**

**Dangerous goods**

**Environment**

[Miscellaneous](#)



[Confirmation](#)

[Special Test Certificate](#)

[Transport Information](#)



**Environment**

[Environmental Certifications](#)

**Further information**

**Information on the packaging**

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

**Information for data generation and storage**

<https://support.industry.siemens.com/cs/ww/en/view/109995012>

**Information- and Downloadcenter (Catalogs, Brochures,...)**

<https://www.siemens.com/ic10>

**Industry Mall (Online ordering system)**

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RH2122-1KF40-0LA4>

**Cax online generator**

<https://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RH2122-1KF40-0LA4>

**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**

<https://support.industry.siemens.com/cs/ww/en/ps/3RH2122-1KF40-0LA4>

**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)**





[https://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3RH2122-1KF40-0LA4&lang=en](https://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RH2122-1KF40-0LA4&lang=en)


**Characteristic: Tripping characteristics, I<sub>t</sub>, Let-through current**

<https://support.industry.siemens.com/cs/ww/en/ps/3RH2122-1KF40-0LA4/char>

**Further characteristics (e.g. electrical endurance, switching frequency)**

<https://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RH2122-1KF40-0LA4&objecttype=14&gridview=view1>

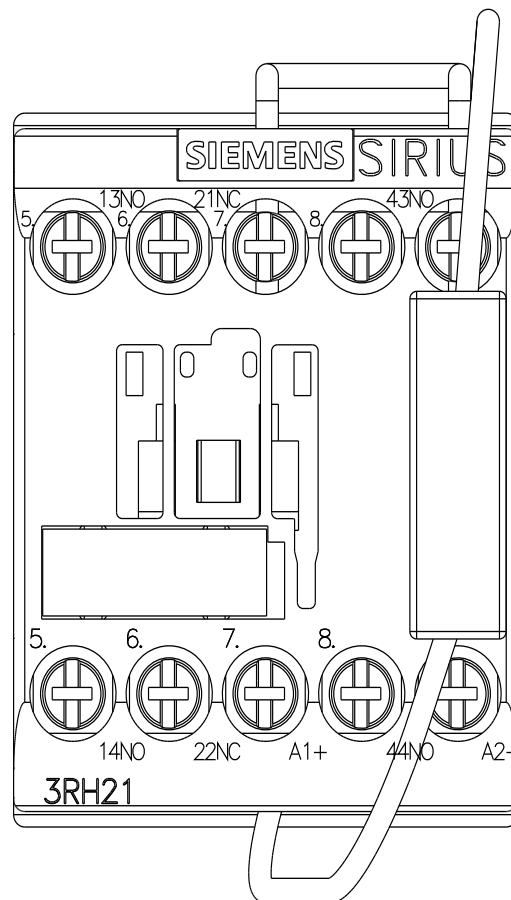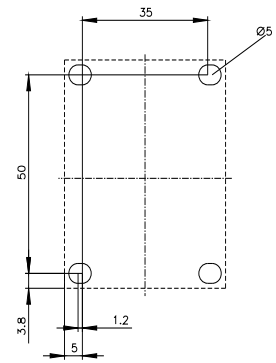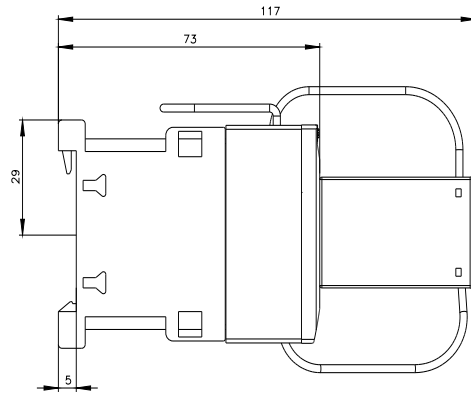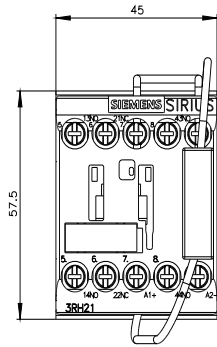

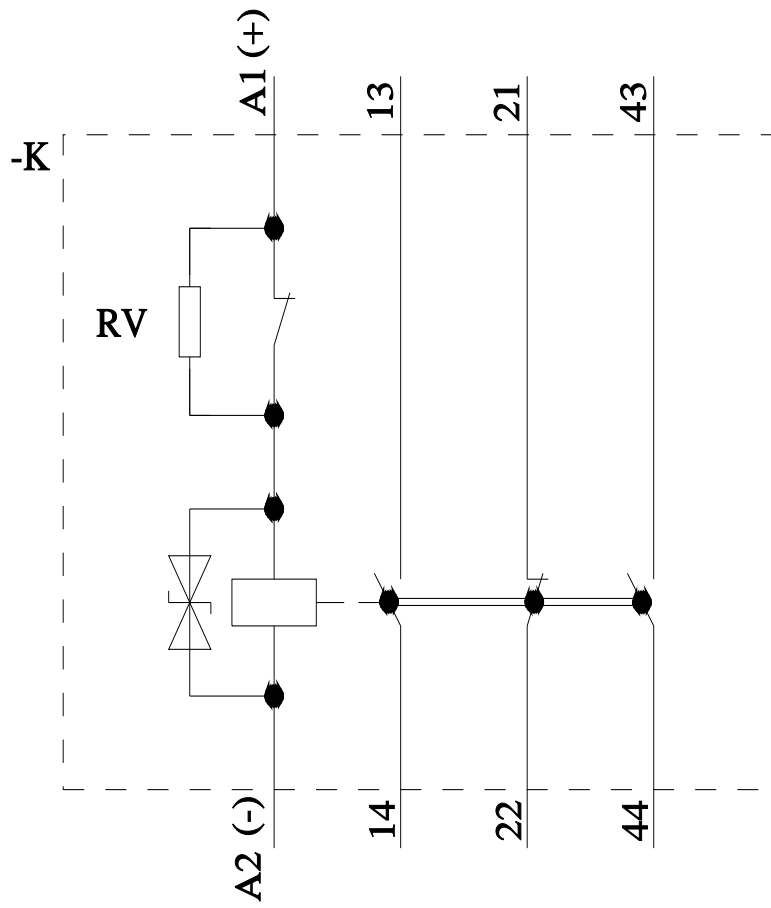

last modified:

10/18/2025 