



contactor relay, 2 NO + 2 NC, 110 V AC, 50 Hz / 120 V, 60 Hz, spring-loaded terminal, frame size S00

|   |                            |
|---|----------------------------|
| <b>product brand name</b>   | SIRIUS                     |
| <b>product designation</b>  | Auxiliary contactor        |
| <b>product type designation</b>   | 3RH2                       |
| <b>General technical data</b>   |                            |
| <b>size of contactor</b>  | S00                        |
| product extension auxiliary switch  | Yes                        |
| power loss [W] for rated value of the current without load current share typical      | 1.43 W                     |
| insulation voltage with degree of pollution 3 at AC rated value                       | 690 V                      |
| <b>degree of pollution</b>  | 3                          |
| <b>surge voltage resistance rated value</b>   | 6 kV                       |
| <b>shock resistance at rectangular impulse</b>  |                            |
| • at AC   | 7,3g / 5 ms, 4,7g / 10 ms  |
| <b>shock resistance with sine pulse</b>   |                            |
| • at AC   | 11,4g / 5 ms, 7,3g / 10 ms |
| <b>mechanical service life (operating cycles)</b>                                     |                            |
| • of contactor typical  | 30 000 000                 |
| • of the contactor with added electronically optimized auxiliary switch block typical | 5 000 000                  |
| • of the contactor with added auxiliary switch block typical                          | 10 000 000                 |
| <b>reference code according to IEC 81346-2</b>  | K                          |
| <b>Substance Prohibittance (Date)</b>   | 10/01/2009                 |
| <b>Weight</b>   | 0.256 kg                   |
| <b>Ambient conditions</b>   |                            |
| installation altitude at height above sea level maximum                               | 2 000 m                    |
| <b>ambient temperature</b>  |                            |
| • during operation  | -25 ... +60 °C             |
| • during storage  | -55 ... +80 °C             |
| <b>relative humidity minimum</b>  | 10 %                       |
| <b>relative humidity at 55 °C according to IEC 60068-2-30 maximum</b>                 | 95 %                       |
| <b>Environmental footprint</b>  |                            |
| Environmental Product Declaration (EPD)   | Yes                        |
| global warming potential [CO <sub>2</sub> eq] total                                   | 49.2 kg                    |
| global warming potential [CO <sub>2</sub> eq] during manufacturing                    | 1.15 kg                    |
| global warming potential [CO <sub>2</sub> eq] during operation                        | 48.2 kg                    |
| global warming potential [CO <sub>2</sub> eq] after end of life                       | -0.139 kg                  |
| <b>Main circuit</b>   |                            |
| <b>no-load switching frequency</b>  |                            |
| • at AC   | 10 000 1/h                 |
| • at DC   | 10 000 1/h                 |

**Control circuit/ Control**

|   |                             |
|---|-----------------------------|
| <b>type of voltage of the control supply voltage</b>  | AC                          |
| <b>control supply voltage at AC</b> <ul style="list-style-type: none"><li>• at 50 Hz rated value</li><li>• at 60 Hz rated value</li></ul>                           | 110 V<br>120 V              |
| <b>control supply voltage frequency</b> <ul style="list-style-type: none"><li>• 1 rated value</li><li>• 2 rated value</li></ul>                                     | 50 Hz<br>60 Hz              |
| <b>operating range factor control supply voltage rated value of magnet coil at AC</b> <ul style="list-style-type: none"><li>• at 50 Hz</li><li>• at 60 Hz</li></ul> | 0.8 ... 1.1<br>0.85 ... 1.1 |
| <b>apparent pick-up power of magnet coil at AC</b>  | 37 VA                       |
| <b>inductive power factor with closing power of the coil</b>  | 0.8                         |
| <b>apparent holding power of magnet coil at AC</b>  | 5.7 VA                      |
| <b>inductive power factor with the holding power of the coil</b>  | 0.25                        |
| <b>closing delay</b> <ul style="list-style-type: none"><li>• at AC</li></ul>  | 8 ... 33 ms                 |
| <b>opening delay</b> <ul style="list-style-type: none"><li>• at AC</li></ul>  | 4 ... 15 ms                 |
| <b>arcing time</b>  | 10 ... 15 ms                |

**Auxiliary circuit**

|  |   |
|--|---|
| <b>number of NC contacts for auxiliary contacts</b> <ul style="list-style-type: none"><li>• instantaneous contact</li></ul>  | 2<br>2  |
| <b>number of NO contacts for auxiliary contacts</b> <ul style="list-style-type: none"><li>• instantaneous contact</li></ul>  | 2<br>2  |
| <b>identification number and letter for switching elements</b>   | 22 E  |
| <b>operational current at AC-12 maximum</b>  | 10 A  |
| <b>operational current at AC-15</b> <ul style="list-style-type: none"><li>• at 230 V rated value</li><li>• at 400 V rated value</li><li>• at 500 V rated value</li><li>• at 690 V rated value</li></ul>  | 10 A<br>3 A<br>2 A<br>1 A                       |
| <b>operational current at 1 current path at DC-12</b> <ul style="list-style-type: none"><li>• at 24 V rated value</li><li>• at 110 V rated value</li><li>• at 220 V rated value</li><li>• at 440 V rated value</li><li>• at 600 V rated value</li></ul>  | 10 A<br>3 A<br>1 A<br>0.3 A<br>0.15 A           |
| <b>operational current with 2 current paths in series at DC-12</b> <ul style="list-style-type: none"><li>• at 24 V rated value</li><li>• at 60 V rated value</li><li>• at 110 V rated value</li><li>• at 220 V rated value</li><li>• at 440 V rated value</li><li>• at 600 V rated value</li></ul> | 10 A<br>10 A<br>4 A<br>2 A<br>1.3 A<br>0.65 A   |
| <b>operational current with 3 current paths in series at DC-12</b> <ul style="list-style-type: none"><li>• at 24 V rated value</li><li>• at 60 V rated value</li><li>• at 110 V rated value</li><li>• at 220 V rated value</li><li>• at 440 V rated value</li><li>• at 600 V rated value</li></ul> | 10 A<br>10 A<br>10 A<br>3.6 A<br>2.5 A<br>1.8 A |
| <b>operating frequency at DC-12 maximum</b>  | 1 000 1/h                                       |
| <b>operational current at 1 current path at DC-13</b> <ul style="list-style-type: none"><li>• at 24 V rated value</li><li>• at 110 V rated value</li><li>• at 220 V rated value</li><li>• at 440 V rated value</li><li>• at 600 V rated value</li></ul>  | 10 A<br>1 A<br>0.3 A<br>0.14 A<br>0.1 A         |
| <b>operational current with 2 current paths in series at DC-13</b>   |   |

|   |  |
|---|--|
| <ul style="list-style-type: none"> <li>• at 24 V rated value</li> <li>• at 60 V rated value</li> <li>• at 110 V rated value</li> <li>• at 220 V rated value</li> <li>• at 440 V rated value</li> <li>• at 600 V rated value</li> </ul>  | 10 A<br>3.5 A<br>1.3 A<br>0.9 A<br>0.2 A<br>0.1 A  |
| <b>operational current with 3 current paths in series at DC-13</b>  |  |
| <ul style="list-style-type: none"> <li>• at 24 V rated value</li> <li>• at 60 V rated value</li> <li>• at 110 V rated value</li> <li>• at 220 V rated value</li> <li>• at 440 V rated value</li> <li>• at 600 V rated value</li> </ul>  | 10 A<br>4.7 A<br>3 A<br>1.2 A<br>0.5 A<br>0.26 A   |
| <b>operating frequency at DC-13 maximum</b>   | 1 000 1/h  |
| <b>contact reliability of auxiliary contacts</b>  | 1 faulty switching per 100 million (17 V, 1 mA)  |
| <b>UL/CSA ratings</b>   |  |
| <b>contact rating of auxiliary contacts according to UL</b>   | A600 / Q600  |
| <b>Short-circuit protection</b>   |  |
| design of the miniature circuit breaker for short-circuit protection of the auxiliary circuit up to 230 V   | C characteristic: 10 A; 0.4 kA   |
| design of the fuse link for short-circuit protection of the auxiliary switch required   | gG: 10 A (690 V, 1 kA)   |
| <b>Installation/ mounting/ dimensions</b>   |  |
| <b>mounting position</b>  | +/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface |
| <b>fastening method</b>   | screw and snap-on mounting onto 35 mm DIN rail   |
| <b>height</b>   | 70 mm  |
| <b>width</b>  | 45 mm  |
| <b>depth</b>  | 73 mm  |
| <b>required spacing</b>   |  |
| <ul style="list-style-type: none"> <li>• with side-by-side mounting               <ul style="list-style-type: none"> <li>— forwards</li> <li>— upwards</li> <li>— downwards</li> <li>— at the side</li> </ul> </li> <li>• for grounded parts               <ul style="list-style-type: none"> <li>— forwards</li> <li>— upwards</li> <li>— at the side</li> <li>— downwards</li> </ul> </li> <li>• for live parts               <ul style="list-style-type: none"> <li>— forwards</li> <li>— upwards</li> <li>— downwards</li> <li>— at the side</li> </ul> </li> </ul> | 10 mm<br>10 mm<br>10 mm<br>0 mm<br><br>10 mm<br>10 mm<br>6 mm<br>10 mm<br><br>10 mm<br>10 mm<br>10 mm<br>6 mm                        |
| <b>Connections/ Terminals</b>   |  |
| type of electrical connection for auxiliary and control circuit   | spring-loaded terminals  |
| <b>type of connectable conductor cross-sections</b>   |  |
| <ul style="list-style-type: none"> <li>• for auxiliary contacts               <ul style="list-style-type: none"> <li>— solid or stranded</li> <li>— finely stranded with core end processing</li> <li>— finely stranded without core end processing</li> </ul> </li> <li>• for AWG cables for auxiliary contacts</li> </ul>   | 2x (0,5 ... 4 mm <sup>2</sup> )<br>2x (0.5 ... 2.5 mm <sup>2</sup> )<br>2x (0.5 ... 2.5 mm <sup>2</sup> )<br>2x (20 ... 12)          |
| <b>Safety related data</b>  |  |
| <b>product function</b>   |  |
| <ul style="list-style-type: none"> <li>• positively driven operation according to IEC 60947-5-1</li> <li>• suitable for safety function</li> </ul>  | Yes<br>Yes   |
| suitability for use safety-related switching OFF  | Yes  |
| <b>service life maximum</b>   | 20 a   |
| <b>proportion of dangerous failures</b>   |  |
| <ul style="list-style-type: none"> <li>• with low demand rate according to SN 31920</li> </ul>  | 40 %   |

|  |  |
|--|--|
| • with high demand rate according to SN 31920                        | 73 %   |
| <b>B10 value with high demand rate according to SN 31920</b>         | 1 000 000; With 0.3 x I <sub>e</sub>             |
| <b>failure rate [FIT] with low demand rate according to SN 31920</b> | 100 FIT  |
| <b>ISO 13849</b>   |  |
| <b>device type according to ISO 13849-1</b>                          | 3  |
| <b>overdimensioning according to ISO 13849-2 necessary</b>           | Yes  |
| <b>IEC 61508</b>   |  |
| <b>safety device type according to IEC 61508-2</b>                   | Type A   |
| <b>Electrical Safety</b>   |  |
| <b>protection class IP on the front according to IEC 60529</b>       | IP20   |
| <b>touch protection on the front according to IEC 60529</b>          | finger-safe, for vertical contact from the front |

### Approvals Certificates

#### General Product Approval



[KC](#)



|                          |     |                   |                   |                      |
|--------------------------|-----|-------------------|-------------------|----------------------|
| General Product Approval | EMV | Functional Safety | Test Certificates | Maritime application |
|--------------------------|-----|-------------------|-------------------|----------------------|



[Type Examination Certificate](#)

[Special Test Certificate](#)

[Type Test Certificates/Test Report](#)



#### Maritime application



|       |         |             |
|-------|---------|-------------|
| other | Railway | Environment |
|-------|---------|-------------|

[Miscellaneous](#)



[Confirmation](#)

[Special Test Certificate](#)



[Environmental Confirmations](#)

#### Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information for data generation and storage

<https://support.industry.siemens.com/cs/ww/en/view/109995012>

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RH2122-2AK60>

Cax online generator

<https://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RH2122-2AK60>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RH2122-2AK60>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)



[https://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3RH2122-2AK60&lang=en](https://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RH2122-2AK60&lang=en)

Characteristic: Tripping characteristics, I<sub>t</sub>, Let-through current

<https://support.industry.siemens.com/cs/ww/en/ps/3RH2122-2AK60/char>

Further characteristics (e.g. electrical endurance, switching frequency)

<https://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RH2122-2AK60&objecttype=14&gridview=view1>

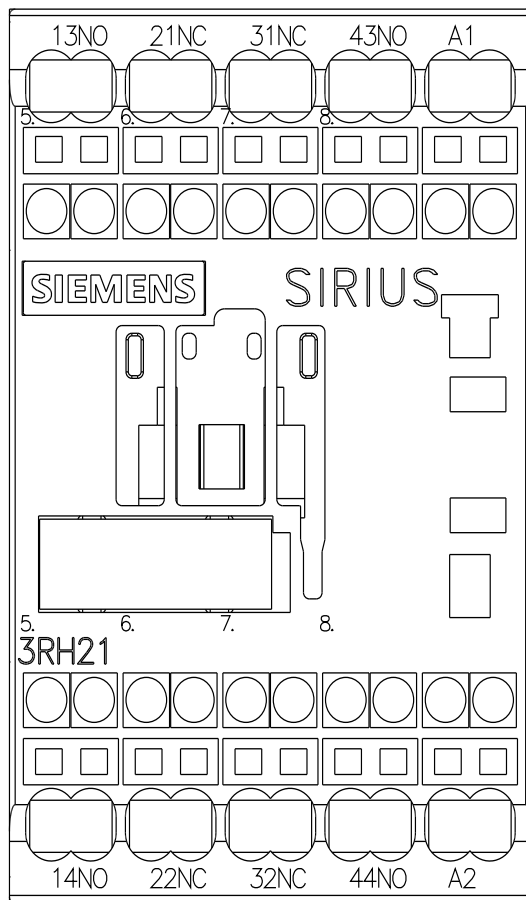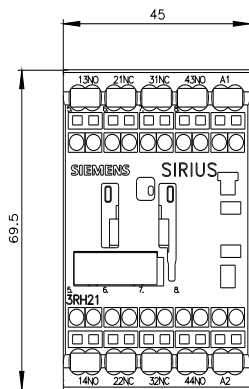



last modified:

9/5/2025 