



ET 200 RSM Maintenance switch module Up to 25 A Up to 25 A Disconnecter function for Main circuit Han Q4/2

product brand name	SIMATIC
product designation	Motor starters
design of the product	maintenance switch
product type designation	ET 200pro
General technical data	
product function on-site operation	Yes
insulation voltage rated value	400 V
degree of pollution	3
surge voltage resistance rated value	6 kV
maximum permissible voltage for protective separation between main and auxiliary circuit	400 V
shock resistance	15g / 11 ms
vibration resistance	2g
type of coordination	1
reference code according to IEC 81346-2	Q
Substance Prohibition (Date)	05/01/2012
SVHC substance name	Lead - 7439-92-1 Lead monoxide (lead oxide) - 1317-36-8 Lead titanium zirconium oxide - 12626-81-2
Weight	1.71 kg
product component motor brake output	No
product feature	
• brake control with 230 V AC	No
• brake control with 400 V AC	No
• brake control with 24 V DC	No
• brake control with 180 V DC	No
• brake control with 500 V DC	No
product function short circuit protection	Yes
design of short-circuit protection	circuit-breakers
maximum short-circuit current breaking capacity (Icu)	
• at 400 V rated value	50 000 A
IEC 62061	
PFHD with high demand rate according to IEC 62061	5.35E-11 1/h
IEC 61508	
Safety Integrity Level (SIL)	
• according to IEC 61508	SIL 3
T1 value for proof test interval or service life according to IEC 61508	10 a
Electrical Safety	
touch protection against electrical shock	finger-safe
Main circuit	

number of poles for main current circuit	3
adjustable current response value current of the current-dependent overload release	25 ... 25 A
type of voltage	AC
operating voltage rated value	200 ... 400 V
operating range relative to the operating voltage at AC at 50 Hz	200 ... 440 V
operational current	
• at AC at 400 V rated value	25 A
• at AC-3 at 400 V rated value	25 A
Inputs/ Outputs	
product function	
• digital inputs parameterizable	No
• digital outputs parameterizable	No
number of digital inputs	0
number of sockets	
• for digital output signals	0
• for digital input signals	0
Supply voltage	
type of voltage of the supply voltage	DC
supply voltage 1 at DC	24 ... 24 V
supply voltage 1 at DC rated value	
• minimum permissible	20.4 V
• maximum permissible	28.8 V
Control circuit/ Control	
type of voltage of the control supply voltage	DC
control supply voltage at DC rated value	20.4 ... 28.8 V
control supply voltage 1 at DC rated value	20.4 ... 28.8 V
control supply voltage 1 at DC	24 ... 24 V
Installation/ mounting/ dimensions	
mounting position	any
fastening method	screw fixing
height	230 mm
width	110 mm
depth	170 mm
Ambient conditions	
installation altitude at height above sea level maximum	3 500 m
ambient temperature	
• during operation	-25 ... +55 °C
• during storage	-40 ... +70 °C
• during transport	-40 ... +70 °C
relative humidity during operation	5 ... 95 %
Communication/ Protocol	
protocol is supported	
• PROFIBUS DP protocol	Yes
• PROFINET protocol	Yes
design of the interface PROFINET protocol	Yes
product function bus communication	Yes
protocol is supported AS-Interface protocol	No
product function	
• supports PROFlenergy measured values	No
• supports PROFlenergy shutdown	No
address space memory of address range	
• of the inputs	1 byte
• of the outputs	0 byte
type of electrical connection of the communication interface	via backplane bus
Connections/ Terminals	
type of electrical connection	
• for main current circuit	tab terminals
type of electrical connection	
• 1 for digital input signals	M12 socket
• 2 for digital input signals	M12 socket

<ul style="list-style-type: none"> • 3 for digital input signals • 4 for digital input signals 	M12 socket M12 socket
type of electrical connection <ul style="list-style-type: none"> • at the manufacturer-specific device interface • for main energy infeed • for load-side outgoing feeder • for main energy transmission • for supply voltage line-side • for supply voltage transmission 	optical interface socket according to ISO23570 socket according to ISO23570 socket according to ISO23570 via backplane bus via backplane bus

UL/CSA ratings	
operating voltage at AC at 60 Hz according to CSA and UL rated value	600 V

Approvals Certificates	
General Product Approval	EMV



Test Certificates	other	Environment
-------------------	-------	-------------

[Type Test Certificates/Test Report](#)



[Confirmation](#)

[Environmental Confirmations](#)

Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information for data generation and storage

<https://support.industry.siemens.com/cs/ww/en/view/109995012>

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RK1304-0HS00-6AA0>

Cax online generator



<https://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RK1304-0HS00-6AA0>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RK1304-0HS00-6AA0>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

https://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RK1304-0HS00-6AA0&lang=en

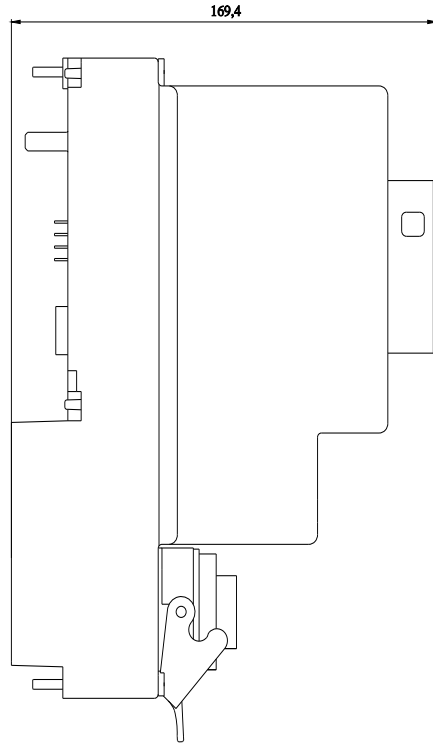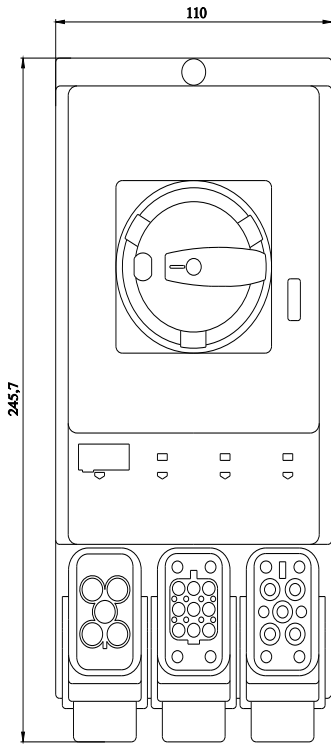

last modified:

4/1/2025 