



Figure similar

ET 200pro RSE ST Reversing starter standard Mechanical switching Electronic overload protection AC-3, 0.9 kW / 400 V 0.15 A...2.00 A without brake contact Han Q4/2 - Han Q8/0

| | |
|--|---|
| product brand name | SIMATIC |
| product designation | Motor starters |
| design of the product | reversing starter |
| product type designation | ET 200pro |
| General technical data | |
| product function on-site operation | Yes |
| insulation voltage rated value | 400 V |
| degree of pollution | 3 |
| surge voltage resistance rated value | 6 kV |
| maximum permissible voltage for protective separation between main and auxiliary circuit | 400 V |
| shock resistance | 15g / 11 ms |
| vibration resistance | 2g |
| mechanical service life (operating cycles) of the main contacts typical | 30 000 000 |
| type of coordination | 1 |
| reference code according to IEC 81346-2 | Q |
| Substance Prohibitance (Date) | 05/01/2012 |
| SVHC substance name | Lead - 7439-92-1 Lead monoxide (lead oxide) - 1317-36-8 2,2',6,6'-tetrabromo-4,4'-isopropylidenediphenol - 79-94-7 Lead titanium zirconium oxide - 12626-81-2 6,6'-di-tert-butyl-2,2'-methylenedi-p-cresol - 119-47-1 |
| Weight | 1.999 kg |
| product function | |
| • direct start | No |
| • reverse starting | Yes |
| product component motor brake output | No |
| product feature | |
| • brake control with 230 V AC | No |
| • brake control with 400 V AC | No |
| • brake control with 24 V DC | No |
| • brake control with 180 V DC | No |
| • brake control with 500 V DC | No |
| product function short circuit protection | Yes |
| design of short-circuit protection | fuse |
| maximum short-circuit current breaking capacity (Icu) | |
| • at 400 V rated value | 100 000 A |
| Safety related data | |
| proportion of dangerous failures | |
| • with low demand rate according to SN 31920 | 50 % |

| | |
|--|----------------------|
| <ul style="list-style-type: none"> with high demand rate according to SN 31920 | 75 % |
| B10 value with high demand rate according to SN 31920 | 1 000 000 |
| failure rate [FIT] with low demand rate according to SN 31920 | 100 FIT |
| IEC 61508 | |
| T1 value for proof test interval or service life according to IEC 61508 | 20 a |
| Electrical Safety | |
| touch protection against electrical shock | finger-safe |
| Main circuit | |
| number of poles for main current circuit | 3 |
| design of the switching contact | electromechanical |
| adjustable current response value current of the current-dependent overload release | 0.15 ... 2 A |
| type of the motor protection | solid-state |
| type of voltage | AC |
| operating voltage rated value | 200 ... 400 V |
| operating range relative to the operating voltage at AC at 50 Hz | 200 ... 440 V |
| operational current | |
| <ul style="list-style-type: none"> at AC at 400 V rated value | 2 A |
| <ul style="list-style-type: none"> at AC-3 at 400 V rated value | 2 A |
| operating power | |
| <ul style="list-style-type: none"> at AC-3 at 400 V rated value | 900 W |
| operating power for 3-phase motors at 400 V at 50 Hz | 70 ... 900 W |
| Inputs/ Outputs | |
| product function | |
| <ul style="list-style-type: none"> digital inputs parameterizable | No |
| <ul style="list-style-type: none"> digital outputs parameterizable | No |
| number of digital inputs | 0 |
| number of sockets | |
| <ul style="list-style-type: none"> for digital output signals | 0 |
| <ul style="list-style-type: none"> for digital input signals | 0 |
| Supply voltage | |
| type of voltage of the supply voltage | DC |
| supply voltage 1 at DC | 24 ... 24 V |
| supply voltage 1 at DC rated value | |
| <ul style="list-style-type: none"> minimum permissible | 20.4 V |
| <ul style="list-style-type: none"> maximum permissible | 28.8 V |
| Control circuit/ Control | |
| type of voltage of the control supply voltage | DC |
| control supply voltage at DC rated value | 20.4 ... 28.8 V |
| control supply voltage 1 at DC rated value | 20.4 ... 28.8 V |
| control supply voltage 1 at DC | 24 ... 24 V |
| power loss [W] in auxiliary and control circuit | |
| <ul style="list-style-type: none"> in switching state OFF <ul style="list-style-type: none"> with bypass circuit | 1.6416 W |
| <ul style="list-style-type: none"> without bypass circuit | 1.6416 W |
| <ul style="list-style-type: none"> in switching state ON <ul style="list-style-type: none"> with bypass circuit | 3.888 W |
| <ul style="list-style-type: none"> without bypass circuit | 3.888 W |
| Installation/ mounting/ dimensions | |
| mounting position | vertical, horizontal |
| fastening method | screw fixing |
| height | 230 mm |
| width | 110 mm |
| depth | 150 mm |
| Ambient conditions | |
| installation altitude at height above sea level maximum | 3 500 m |
| ambient temperature | |
| <ul style="list-style-type: none"> during operation | -25 ... +55 °C |
| <ul style="list-style-type: none"> during storage | -40 ... +70 °C |

| | |
|------------------------------------|----------------|
| • during transport | -40 ... +70 °C |
| relative humidity during operation | 5 ... 95 % |

Communication/ Protocol

| | |
|--|-------------------|
| protocol is supported | |
| • PROFIBUS DP protocol | Yes |
| • PROFINET protocol | Yes |
| design of the interface PROFINET protocol | Yes |
| product function bus communication | Yes |
| protocol is supported AS-Interface protocol | No |
| product function | |
| • supports PROFlenergy measured values | Yes |
| • supports PROFlenergy shutdown | Yes |
| address space memory of address range | |
| • of the inputs | 2 byte |
| • of the outputs | 2 byte |
| type of electrical connection of the communication interface | via backplane bus |

Connections/ Terminals

| | |
|---|------------------------------|
| type of electrical connection | |
| • for main current circuit | tab terminals |
| type of electrical connection | |
| • 1 for digital input signals | M12 socket |
| • 2 for digital input signals | M12 socket |
| • 3 for digital input signals | M12 socket |
| • 4 for digital input signals | M12 socket |
| type of electrical connection | |
| • at the manufacturer-specific device interface | optical interface |
| • for main energy infeed | socket according to ISO23570 |
| • for load-side outgoing feeder | socket according to ISO23570 |
| • for main energy transmission | socket according to ISO23570 |
| • for supply voltage line-side | via backplane bus |
| • for supply voltage transmission | via backplane bus |

UL/CSA ratings

| | |
|--|-------|
| operating voltage at AC at 60 Hz according to CSA and UL rated value | 600 V |
|--|-------|

Approvals Certificates

| | |
|--------------------------|-----|
| General Product Approval | EMV |
|--------------------------|-----|



| | | | |
|-------------------|-------|-----------------|-------------|
| Test Certificates | other | Dangerous goods | Environment |
|-------------------|-------|-----------------|-------------|

[Type Test Certificates/Test Report](#)

[Confirmation](#)



[Transport Information](#)

[Environmental Confirmations](#)

Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information for data generation and storage

<https://support.industry.siemens.com/cs/ww/en/view/109995012>

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RK1304-5KS40-5AA0>

Cax online generator



<https://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RK1304-5KS40-5AA0>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RK1304-5KS40-5AA0>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

https://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RK1304-5KS40-5AA0&lang=en

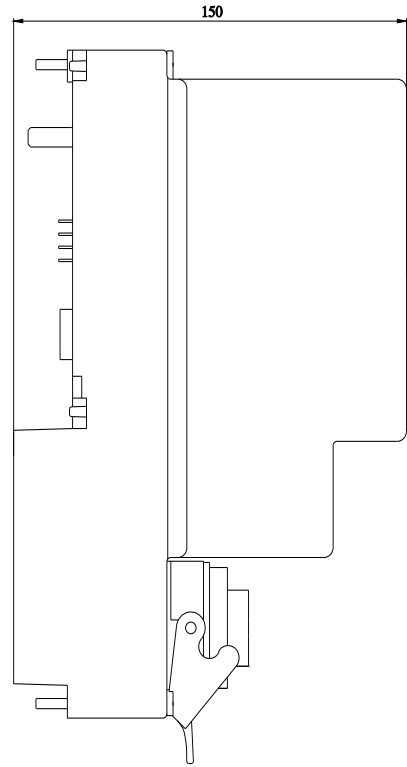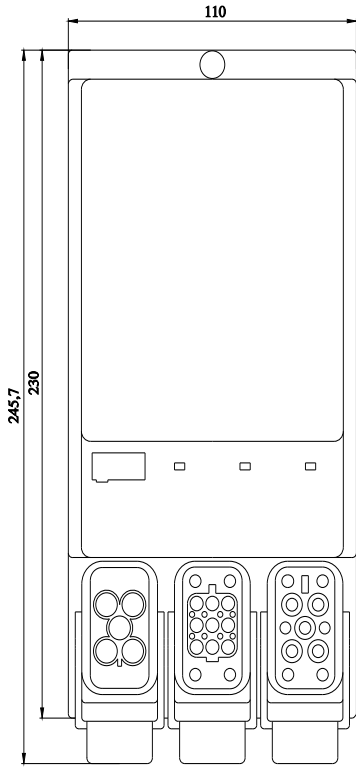

last modified:

4/1/2025 