

ECOFAST Energy T clamping connector for feeder 6 mm²



product category	Miscellaneous accessories	
product designation	Power T terminal connector	
General technical data		
degree of pollution	3	
surge voltage resistance rated value	6 000 V	
protection class IP	IP65	
Substance Prohibittance (Date)	05/01/2012	
Weight	0.344 kg	
operating voltage rated value maximum	690 V	
operational current at AC at 400 V rated value	40 A	
Ambient conditions		
ambient temperature during operation	-40 ... +125 °C	
Installation/ mounting/ dimensions		
height	55 mm	
width	112 mm	
length	158 mm	
Approvals Certificates		
General Product Approval	EMV	other



other	Environment
Confirmation	Environmental Confirmations

Further information

- Information on the packaging
<https://support.industry.siemens.com/cs/ww/en/view/109813875>
- Information for data generation and storage
<https://support.industry.siemens.com/cs/ww/en/view/109995012>
- Information- and Downloadcenter (Catalogs, Brochures,...)
<https://www.siemens.com/ic10>
- Industry Mall (Online ordering system)
<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RK1911-2BF02>
- Cax online generator
<https://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RK1911-2BF02>
- Service&Support (Manuals, Certificates, Characteristics, FAQs,...)
<https://support.industry.siemens.com/cs/ww/en/ps/3RK1911-2BF02>
- Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)
https://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RK1911-2BF02&lang=en

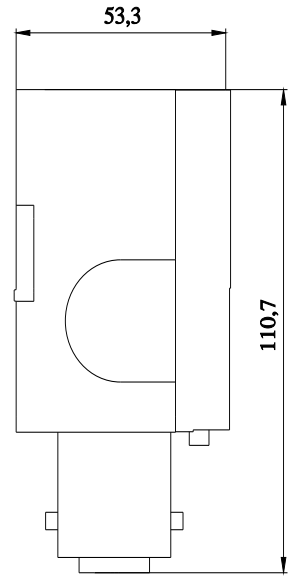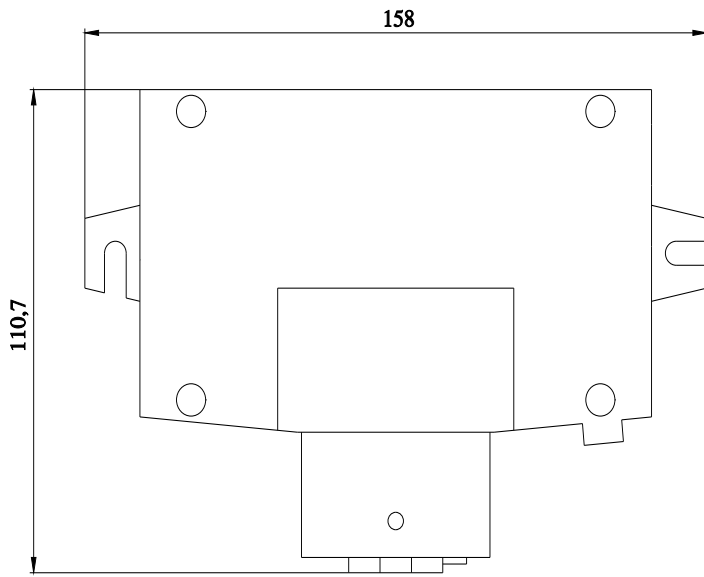

last modified:

4/2/2025 