



rear panel bus module 110 mm for ET 200pro motor starter isolator modules and ASM disconnecting module 400 V

Substance Prohibance (Date)	05/01/2012
Weight	0.242 kg
Electrical Safety	
protection class IP on the front according to IEC 60529	IP00
touch protection on the front according to IEC 60529	finger-safe
Ambient conditions	
ambient temperature	
• during operation	55 ... -25 °C
• during storage	-40 ... +70 °C

Approvals Certificates		
General Product Approval	EMV	Test Certificates



[Type Test Certificates/Test Report](#)

other	Environment
-------	-------------




[Confirmation](#)

[Environmental Confirmations](#)

Further information

- Information on the packaging
<https://support.industry.siemens.com/cs/ww/en/view/109813875>
- Information for data generation and storage
<https://support.industry.siemens.com/cs/ww/en/view/109995012>
- Information- and Downloadcenter (Catalogs, Brochures,...)
<https://www.siemens.com/ic10>
- Industry Mall (Online ordering system)
<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RK1922-2BA00>
- Cax online generator
<https://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RK1922-2BA00>
- Service&Support (Manuals, Certificates, Characteristics, FAQs,...)
<https://support.industry.siemens.com/cs/ww/en/ps/3RK1922-2BA00>
- Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)
https://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RK1922-2BA00&lang=en

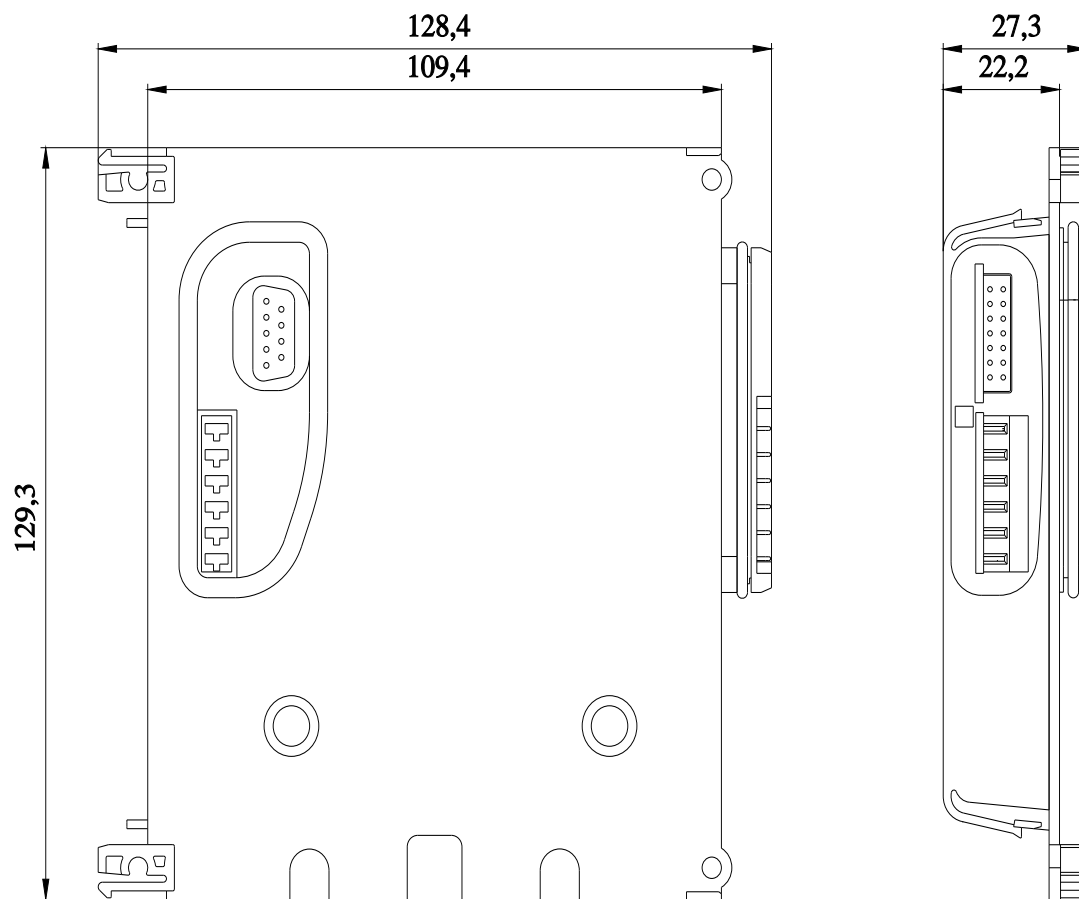

last modified:

4/2/2025 