

Power jumper plug for power transmission (400 V) from ET 200pro maintenance switch module or motor starter to motor starter



Substance Prohibance (Date)	05/01/2012
Weight	0.19 kg
Electrical Safety	
protection class IP on the front according to IEC 60529	IP20
touch protection on the front according to IEC 60529	finger-safe
Ambient conditions	
ambient temperature	
• during operation	55 ... -25 °C
• during storage	-40 ... +70 °C

Approvals Certificates		
General Product Approval	EMV	Test Certificates



EG-Konf.



UL



RCM

[Type Test Certificates/Test Report](#)

other	Environment
-------	-------------



[Confirmation](#)

[Environmental Confirmations](#)

### Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information for data generation and storage

<https://support.industry.siemens.com/cs/ww/en/view/109995012>

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RK1922-2BQ00>

Cax online generator


<https://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RK1922-2BQ00>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RK1922-2BQ00>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

[https://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3RK1922-2BQ00&lang=en](https://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RK1922-2BQ00&lang=en)

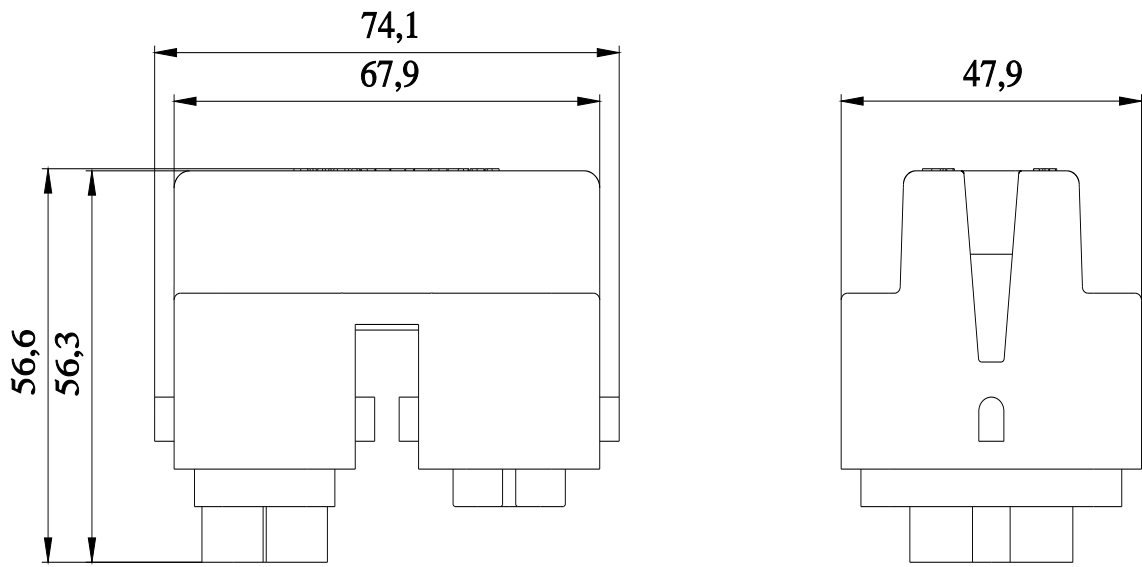

---

last modified:

4/2/2025 