



power contactor, AC-3e/AC-3, 12 A, 5.5 kW / 400 V, 3-pole, 24 V DC, 0.7-1.25\* U<sub>c</sub>, auxiliary contacts: 1 NO, spring-loaded terminal, frame size: S00, suitable for PLC outputs, no auxiliary switch can be added

|  |                            |
|--|----------------------------|
| <b>product brand name</b>  | SIRIUS                     |
| <b>product designation</b>   | Power contactor            |
| <b>product type designation</b>  | 3RT2                       |
| <b>General technical data</b>  |                            |
| <b>size of contactor</b>   | S00                        |
| <b>product extension</b>   |                            |
| • function module for communication  | No                         |
| • auxiliary switch   | No                         |
| <b>power loss [W] for rated value of the current</b>   |                            |
| • at AC in hot operating state   | 1.5 W                      |
| • at AC in hot operating state per pole  | 0.5 W                      |
| • without load current share typical   | 2.8 W                      |
| <b>type of calculation of power loss depending on pole</b>   | quadratic                  |
| <b>insulation voltage</b>  |                            |
| • of main circuit with degree of pollution 3 rated value   | 690 V                      |
| • of auxiliary circuit with degree of pollution 3 rated value  | 690 V                      |
| <b>surge voltage resistance</b>  |                            |
| • of main circuit rated value  | 6 kV                       |
| • of auxiliary circuit rated value   | 6 kV                       |
| maximum permissible voltage for protective separation between coil and main contacts according to EN 60947-1 | 400 V                      |
| <b>shock resistance at rectangular impulse</b>   |                            |
| • at DC  | 7.3g / 5 ms, 4.7g / 10 ms  |
| <b>shock resistance with sine pulse</b>  |                            |
| • at DC  | 11.4g / 5 ms, 7.3g / 10 ms |
| <b>mechanical service life (operating cycles)</b>  |                            |
| • of contactor typical   | 30 000 000                 |
| <b>reference code according to IEC 81346-2</b>   | Q                          |
| <b>Substance Prohibition (Date)</b>  | 10/01/2009                 |
| <b>Weight</b>  | 0.317 kg                   |
| <b>Ambient conditions</b>  |                            |
| installation altitude at height above sea level maximum  | 2 000 m                    |
| <b>ambient temperature</b>   |                            |
| • during operation   | -25 ... +60 °C             |
| • during storage   | -55 ... +80 °C             |
| <b>relative humidity minimum</b>   | 10 %                       |
| <b>relative humidity at 55 °C according to IEC 60068-2-30 maximum</b>  | 95 %                       |
| <b>Environmental footprint</b>   |                            |
| Environmental Product Declaration (EPD)  | Yes                        |
| global warming potential [CO <sub>2</sub> eq] total  | 153 kg                     |

|  |                   |
|--|-------------------|
| global warming potential [CO2 eq] during manufacturing                 | 1.42 kg           |
| global warming potential [CO2 eq] during operation                     | 152 kg            |
| global warming potential [CO2 eq] after end of life                    | -0.305 kg         |
| <b>Main circuit</b>  |                   |
| <b>number of poles for main current circuit</b>                        | 3                 |
| <b>number of NO contacts for main contacts</b>                         | 3                 |
| <b>number of NC contacts for main contacts</b>                         | 0                 |
| <b>operating voltage</b>   |                   |
| • at AC-3 rated value maximum  | 690 V             |
| • at AC-3e rated value maximum   | 690 V             |
| <b>operational current</b>   |                   |
| • at AC-1 at 400 V at ambient temperature 40 °C rated value            | 22 A              |
| • at AC-1  |                   |
| — up to 690 V at ambient temperature 40 °C rated value                 | 22 A              |
| — up to 690 V at ambient temperature 60 °C rated value                 | 20 A              |
| • at AC-3  |                   |
| — at 400 V rated value   | 12 A              |
| — at 500 V rated value   | 9.2 A             |
| — at 690 V rated value   | 6.7 A             |
| • at AC-3e   |                   |
| — at 400 V rated value   | 12 A              |
| — at 500 V rated value   | 9.2 A             |
| — at 690 V rated value   | 6.7 A             |
| • at AC-4 at 400 V rated value   | 8.5 A             |
| • at AC-5a up to 690 V rated value                                     | 19.4 A            |
| • at AC-5b up to 400 V rated value                                     | 9.9 A             |
| • at AC-6a   |                   |
| — up to 230 V for current peak value n=20 rated value                  | 7.2 A             |
| — up to 400 V for current peak value n=20 rated value                  | 7.2 A             |
| — up to 500 V for current peak value n=20 rated value                  | 7.2 A             |
| — up to 690 V for current peak value n=20 rated value                  | 6.7 A             |
| • at AC-6a   |                   |
| — up to 230 V for current peak value n=30 rated value                  | 4.8 A             |
| — up to 400 V for current peak value n=30 rated value                  | 4.8 A             |
| — up to 500 V for current peak value n=30 rated value                  | 4.8 A             |
| — up to 690 V for current peak value n=30 rated value                  | 4.8 A             |
| minimum cross-section in main circuit at maximum AC-1 rated value      | 4 mm <sup>2</sup> |
| <b>operational current for approx. 200000 operating cycles at AC-4</b> |                   |
| • at 400 V rated value   | 4.1 A             |
| • at 690 V rated value   | 3.3 A             |
| <b>operational current</b>   |                   |
| • <b>at 1 current path at DC-1</b>                                     |                   |
| — at 24 V rated value  | 20 A              |
| — at 60 V rated value  | 20 A              |
| — at 110 V rated value   | 2.1 A             |
| — at 220 V rated value   | 0.8 A             |
| — at 440 V rated value   | 0.6 A             |
| — at 600 V rated value   | 0.6 A             |
| • <b>with 2 current paths in series at DC-1</b>                        |                   |
| — at 24 V rated value  | 20 A              |
| — at 60 V rated value  | 20 A              |
| — at 110 V rated value   | 12 A              |
| — at 220 V rated value   | 1.6 A             |
| — at 440 V rated value   | 0.8 A             |
| — at 600 V rated value   | 0.7 A             |
| • <b>with 3 current paths in series at DC-1</b>                        |                   |
| — at 24 V rated value  | 20 A              |

|  |  |
|--|--|
| <ul style="list-style-type: none"> <li>— at 60 V rated value</li> <li>— at 110 V rated value</li> <li>— at 220 V rated value</li> <li>— at 440 V rated value</li> <li>— at 600 V rated value</li> </ul>  | 20 A<br>20 A<br>20 A<br>1.3 A<br>1 A   |
| <ul style="list-style-type: none"> <li>● <b>at 1 current path at DC-3 at DC-5</b> <ul style="list-style-type: none"> <li>— at 24 V rated value</li> <li>— at 60 V rated value</li> <li>— at 110 V rated value</li> </ul> </li> </ul>   | 20 A<br>0.5 A<br>0.15 A  |
| <ul style="list-style-type: none"> <li>● <b>with 2 current paths in series at DC-3 at DC-5</b> <ul style="list-style-type: none"> <li>— at 24 V rated value</li> <li>— at 60 V rated value</li> <li>— at 110 V rated value</li> </ul> </li> </ul>  | 20 A<br>5 A<br>0.35 A  |
| <ul style="list-style-type: none"> <li>● <b>with 3 current paths in series at DC-3 at DC-5</b> <ul style="list-style-type: none"> <li>— at 24 V rated value</li> <li>— at 60 V rated value</li> <li>— at 110 V rated value</li> <li>— at 220 V rated value</li> <li>— at 440 V rated value</li> <li>— at 600 V rated value</li> </ul> </li> </ul>  | 20 A<br>20 A<br>20 A<br>1.5 A<br>0.2 A<br>0.2 A  |
| <b>operating power</b> <ul style="list-style-type: none"> <li>● at AC-3               <ul style="list-style-type: none"> <li>— at 230 V rated value</li> <li>— at 400 V rated value</li> <li>— at 500 V rated value</li> <li>— at 690 V rated value</li> </ul> </li> <li>● at AC-3e               <ul style="list-style-type: none"> <li>— at 230 V rated value</li> <li>— at 400 V rated value</li> <li>— at 500 V rated value</li> <li>— at 690 V rated value</li> </ul> </li> </ul> | 3 kW<br>5.5 kW<br>5.5 kW<br>5.5 kW<br><br>3 kW<br>5.5 kW<br>5.5 kW<br>5.5 kW   |
| <b>operating power for approx. 200000 operating cycles at AC-4</b> <ul style="list-style-type: none"> <li>● at 400 V rated value</li> <li>● at 690 V rated value</li> </ul>  | 2 kW<br>2.5 kW   |
| <b>operating apparent power at AC-6a</b> <ul style="list-style-type: none"> <li>● up to 230 V for current peak value n=20 rated value</li> <li>● up to 400 V for current peak value n=20 rated value</li> <li>● up to 500 V for current peak value n=20 rated value</li> <li>● up to 690 V for current peak value n=20 rated value</li> </ul>  | 2.8 kVA<br>4.9 kVA<br>6.2 kVA<br>8 kVA   |
| <b>operating apparent power at AC-6a</b> <ul style="list-style-type: none"> <li>● up to 230 V for current peak value n=30 rated value</li> <li>● up to 400 V for current peak value n=30 rated value</li> <li>● up to 500 V for current peak value n=30 rated value</li> <li>● up to 690 V for current peak value n=30 rated value</li> </ul>  | 1.9 kVA<br>3.3 kVA<br>4.1 kVA<br>5.7 kVA   |
| <b>short-time withstand current in cold operating state up to 40 °C</b> <ul style="list-style-type: none"> <li>● limited to 1 s switching at zero current maximum</li> <li>● limited to 5 s switching at zero current maximum</li> <li>● limited to 10 s switching at zero current maximum</li> <li>● limited to 30 s switching at zero current maximum</li> <li>● limited to 60 s switching at zero current maximum</li> </ul>  | 200 A; Use minimum cross-section acc. to AC-1 rated value<br>123 A; Use minimum cross-section acc. to AC-1 rated value<br>96 A; Use minimum cross-section acc. to AC-1 rated value<br>74 A; Use minimum cross-section acc. to AC-1 rated value<br>61 A; Use minimum cross-section acc. to AC-1 rated value |
| <b>no-load switching frequency</b> <ul style="list-style-type: none"> <li>● at DC</li> </ul>   | 10 000 1/h   |
| <b>operating frequency</b> <ul style="list-style-type: none"> <li>● at AC-1 maximum</li> <li>● at AC-2 maximum</li> <li>● at AC-3 maximum</li> <li>● at AC-3e               <ul style="list-style-type: none"> <li>— maximum</li> </ul> </li> <li>● at AC-4 maximum</li> </ul>   | 1 000 1/h<br>750 1/h<br>750 1/h<br><br>750 1/h<br>250 1/h  |

| Control circuit/ Control  |   |
|---|---|
| type of voltage of the control supply voltage   | DC  |
| control supply voltage at DC rated value  | 24 V  |
| operating range factor control supply voltage rated value of magnet coil at DC                            |   |
| • initial value   | 0.7   |
| • full-scale value  | 1.25  |
| closing power of magnet coil at DC  | 2.8 W   |
| holding power of magnet coil at DC  | 2.8 W   |
| closing delay   |   |
| • at DC   | 25 ... 130 ms                                   |
| opening delay   |   |
| • at DC   | 7 ... 20 ms                                     |
| arcing time   | 10 ... 15 ms                                    |
| control version of the switch operating mechanism   | Standard A1 - A2                                |
| Auxiliary circuit   |   |
| number of NC contacts for auxiliary contacts instantaneous contact  | 0   |
| number of NO contacts for auxiliary contacts instantaneous contact  | 1   |
| operational current at AC-12 maximum  | 10 A  |
| operational current at AC-15  |   |
| • at 230 V rated value  | 10 A  |
| • at 400 V rated value  | 3 A   |
| • at 500 V rated value  | 2 A   |
| • at 690 V rated value  | 1 A   |
| operational current at DC-12  |   |
| • at 24 V rated value   | 10 A  |
| • at 48 V rated value   | 6 A   |
| • at 60 V rated value   | 6 A   |
| • at 110 V rated value  | 3 A   |
| • at 125 V rated value  | 2 A   |
| • at 220 V rated value  | 1 A   |
| • at 600 V rated value  | 0.15 A  |
| operational current at DC-13  |   |
| • at 24 V rated value   | 10 A  |
| • at 48 V rated value   | 2 A   |
| • at 60 V rated value   | 2 A   |
| • at 110 V rated value  | 1 A   |
| • at 125 V rated value  | 0.9 A   |
| • at 220 V rated value  | 0.3 A   |
| • at 600 V rated value  | 0.1 A   |
| contact reliability of auxiliary contacts   | 1 faulty switching per 100 million (17 V, 1 mA) |
| UL/CSA ratings  |   |
| full-load current (FLA) for 3-phase AC motor  |   |
| • at 480 V rated value  | 11 A  |
| • at 600 V rated value  | 11 A  |
| yielded mechanical performance [hp]   |   |
| • for single-phase AC motor   |   |
| — at 110/120 V rated value  | 0.5 hp  |
| — at 230 V rated value  | 2 hp  |
| • for 3-phase AC motor  |   |
| — at 200/208 V rated value  | 3 hp  |
| — at 220/230 V rated value  | 3 hp  |
| — at 460/480 V rated value  | 8 hp  |
| — at 575/600 V rated value  | 10 hp   |
| contact rating of auxiliary contacts according to UL  | A600 / Q600                                     |
| Short-circuit protection  |   |
| design of the miniature circuit breaker for short-circuit protection of the auxiliary circuit up to 230 V | C characteristic: 10 A; 0.4 kA                  |
| design of the fuse link   |   |
| • for short-circuit protection of the main circuit  |   |

- with type of coordination 1 required
- with type of coordination 2 required
- for short-circuit protection of the auxiliary switch required

gG: 50 A (690 V, 100 kA), aM: 20 A (690 V, 100 kA), BS88: 35 A (415 V, 80 kA)  
 gG: 20 A (690 V, 100 kA), aM: 16 A (690 V, 100 kA), BS88: 20 A (415 V, 80 kA)  
 gG: 10 A (500 V, 1 kA)

#### Installation/ mounting/ dimensions

|  |  |
|--|--|
| <b>mounting position</b>   | +/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface |
| fastening method side-by-side mounting   | Yes  |
| <b>fastening method</b>  | screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715   |
| <b>height</b>  | 70 mm  |
| <b>width</b>   | 45 mm  |
| <b>depth</b>   | 73 mm  |
| <b>required spacing</b>  |  |
| <ul style="list-style-type: none"> <li>● with side-by-side mounting           <ul style="list-style-type: none"> <li>— forwards 10 mm</li> <li>— upwards 10 mm</li> <li>— downwards 10 mm</li> <li>— at the side 0 mm</li> </ul> </li> <li>● for grounded parts           <ul style="list-style-type: none"> <li>— forwards 10 mm</li> <li>— upwards 10 mm</li> <li>— at the side 6 mm</li> <li>— downwards 10 mm</li> </ul> </li> <li>● for live parts           <ul style="list-style-type: none"> <li>— forwards 10 mm</li> <li>— upwards 10 mm</li> <li>— downwards 10 mm</li> <li>— at the side 6 mm</li> </ul> </li> </ul> |  |

#### Connections/ Terminals

|   |  |
|---|--|
| <b>type of electrical connection</b>  |  |
| <ul style="list-style-type: none"> <li>● for main current circuit</li> <li>● for auxiliary and control circuit</li> <li>● at contactor for auxiliary contacts</li> <li>● of magnet coil</li> </ul>  | spring-loaded terminals<br>spring-loaded terminals<br>Spring-type terminals<br>Spring-type terminals |
| <b>type of connectable conductor cross-sections</b>   |  |
| <ul style="list-style-type: none"> <li>● for main contacts           <ul style="list-style-type: none"> <li>— solid 2x (0.5 ... 4 mm<sup>2</sup>)</li> <li>— solid or stranded 2x (0.5 ... 4 mm<sup>2</sup>)</li> <li>— finely stranded with core end processing 2x (0.5 ... 2.5 mm<sup>2</sup>)</li> <li>— finely stranded without core end processing 2x (0.5 ... 2.5 mm<sup>2</sup>)</li> </ul> </li> <li>● for AWG cables for main contacts 2x (20 ... 12)</li> </ul> |  |
| <b>connectable conductor cross-section for main contacts</b>  |  |
| <ul style="list-style-type: none"> <li>● solid 0.5 ... 4 mm<sup>2</sup></li> <li>● stranded 0.5 ... 4 mm<sup>2</sup></li> <li>● finely stranded with core end processing 0.5 ... 2.5 mm<sup>2</sup></li> <li>● finely stranded without core end processing 0.5 ... 2.5 mm<sup>2</sup></li> </ul>  |  |
| <b>connectable conductor cross-section for auxiliary contacts</b>   |  |
| <ul style="list-style-type: none"> <li>● solid or stranded 0.5 ... 4 mm<sup>2</sup></li> <li>● finely stranded with core end processing 0.5 ... 2.5 mm<sup>2</sup></li> <li>● finely stranded without core end processing 0.5 ... 2.5 mm<sup>2</sup></li> </ul>   |  |
| <b>type of connectable conductor cross-sections</b>   |  |
| <ul style="list-style-type: none"> <li>● for auxiliary contacts           <ul style="list-style-type: none"> <li>— solid or stranded 2x (0.5 ... 4 mm<sup>2</sup>)</li> <li>— finely stranded with core end processing 2x (0.5 ... 2.5 mm<sup>2</sup>)</li> <li>— finely stranded without core end processing 2x (0.5 ... 2.5 mm<sup>2</sup>)</li> </ul> </li> <li>● for AWG cables for auxiliary contacts 2x (20 ... 12)</li> </ul>                                      |  |
| <b>AWG number as coded connectable conductor cross section for main contacts</b>  | 20 ... 12  |
| <b>AWG number as coded connectable conductor cross section for auxiliary contacts</b>   | 20 ... 12  |

#### Safety related data

|                         |  |
|-------------------------|--|
| <b>product function</b> |  |
|-------------------------|--|

|  |  |
|--|--|
| • mirror contact according to IEC 60947-4-1                          | No   |
| • positively driven operation according to IEC 60947-5-1             | No   |
| • suitable for safety function                                       | Yes  |
| suitability for use safety-related switching OFF                     | Yes  |
| <b>service life maximum</b>  | 20 a   |
| <b>test wear-related service life necessary</b>                      | Yes  |
| <b>proportion of dangerous failures</b>                              |  |
| • with low demand rate according to SN 31920                         | 40 %   |
| • with high demand rate according to SN 31920                        | 73 %   |
| <b>B10 value with high demand rate according to SN 31920</b>         | 1 000 000  |
| <b>failure rate [FIT] with low demand rate according to SN 31920</b> | 100 FIT  |
| <b>ISO 13849</b>   |  |
| <b>device type according to ISO 13849-1</b>                          | 3  |
| <b>overdimensioning according to ISO 13849-2 necessary</b>           | Yes  |
| <b>IEC 61508</b>   |  |
| <b>safety device type according to IEC 61508-2</b>                   | Type A   |
| <b>Electrical Safety</b>   |  |
| <b>protection class IP on the front according to IEC 60529</b>       | IP20   |
| <b>touch protection on the front according to IEC 60529</b>          | finger-safe, for vertical contact from the front |

**Approvals Certificates**

**General Product Approval**



[KC](#)

| General Product Approval | EMV | Test Certificates | Maritime application |
|--------------------------|-----|-------------------|----------------------|
|--------------------------|-----|-------------------|----------------------|



[Special Test Certificate](#)

[Type Test Certificates/Test Report](#)



| Maritime application | other |
|----------------------|-------|
|----------------------|-------|



[Miscellaneous](#)

| other | Railway | Dangerous goods | Environment |
|-------|---------|-----------------|-------------|
|-------|---------|-----------------|-------------|



[Confirmation](#)

[Special Test Certificate](#)

[Transport Information](#)



[Environmental Confirmations](#)

**Further information**

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information for data generation and storage

<https://support.industry.siemens.com/cs/ww/en/view/109995012>

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RT2017-2HB41>

Cax online generator

<https://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RT2017-2HB41>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RT2017-2HB41>

[Image database \(product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...\)](#)


[https://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3RT2017-2HB41&lang=en](https://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RT2017-2HB41&lang=en)

Characteristic: Tripping characteristics, I<sup>2</sup>t, Let-through current

<https://support.industry.siemens.com/cs/ww/en/ps/3RT2017-2HB41/char>

Further characteristics (e.g. electrical endurance, switching frequency)

<https://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RT2017-2HB41&objecttype=14&gridview=view1>

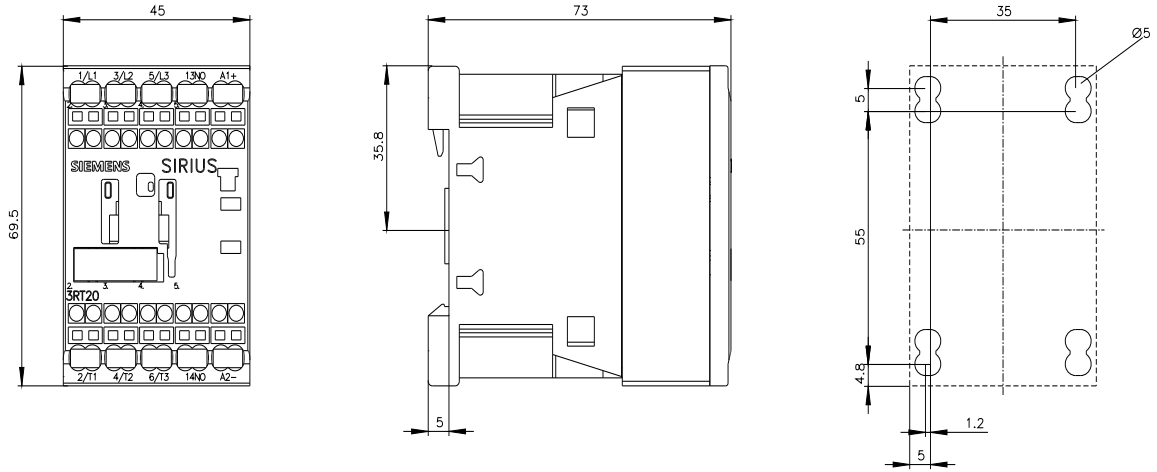



last modified:

10/21/2025