



power contactor, AC-3e/AC-3, 41 A, 18.5 kW / 400 V, 3-pole, 24 V AC, 50 Hz, auxiliary contacts: 1 NO + 1 NC, main circuit: screw terminal, control and auxiliary circuit: spring-loaded terminal, size: S2, upright mounting position

|  |                             |
|--|-----------------------------|
| <b>product brand name</b>  | SIRIUS                      |
| <b>product designation</b>   | Power contactor             |
| <b>product type designation</b>  | 3RT2                        |
| <b>General technical data</b>  |                             |
| <b>size of contactor</b>   | S2                          |
| <b>product extension</b>   |                             |
| • function module for communication  | No                          |
| • auxiliary switch   | Yes                         |
| <b>power loss [W] for rated value of the current</b>   |                             |
| • at AC in hot operating state   | 6.6 W                       |
| • at AC in hot operating state per pole  | 2.2 W                       |
| • without load current share typical   | 6 W                         |
| <b>type of calculation of power loss depending on pole</b>   | quadratic                   |
| <b>insulation voltage</b>  |                             |
| • of main circuit with degree of pollution 3 rated value   | 690 V                       |
| • of auxiliary circuit with degree of pollution 3 rated value  | 690 V                       |
| <b>surge voltage resistance</b>  |                             |
| • of main circuit rated value  | 6 kV                        |
| • of auxiliary circuit rated value   | 6 kV                        |
| maximum permissible voltage for protective separation between coil and main contacts according to EN 60947-1 | 400 V                       |
| <b>shock resistance at rectangular impulse</b>   |                             |
| • at AC  | 11.8g / 5 ms, 7.4g / 10 ms  |
| <b>shock resistance with sine pulse</b>  |                             |
| • at AC  | 18.5g / 5 ms, 11.6g / 10 ms |
| <b>mechanical service life (operating cycles)</b>  |                             |
| • of contactor typical   | 10 000 000                  |
| • of the contactor with added electronically optimized auxiliary switch block typical                        | 5 000 000                   |
| • of the contactor with added auxiliary switch block typical   | 10 000 000                  |
| <b>reference code according to IEC 81346-2</b>   | Q                           |
| <b>Substance Prohibitance (Date)</b>   | 10/01/2014                  |
| <b>Weight</b>  | 0.982 kg                    |
| <b>Ambient conditions</b>  |                             |
| installation altitude at height above sea level maximum  | 2 000 m                     |
| <b>ambient temperature</b>   |                             |
| • during operation   | -25 ... +60 °C              |
| • during storage   | -55 ... +80 °C              |
| <b>relative humidity minimum</b>   | 10 %                        |
| <b>relative humidity at 55 °C according to IEC 60068-2-30 maximum</b>  | 95 %                        |



| Main circuit   |                    |
|--|--------------------|
| number of poles for main current circuit                               | 3                  |
| number of NO contacts for main contacts                                | 3                  |
| number of NC contacts for main contacts                                | 0                  |
| <b>operating voltage</b>   |                    |
| • at AC-3 rated value maximum  | 690 V              |
| • at AC-3e rated value maximum   | 690 V              |
| <b>operational current</b>   |                    |
| • at AC-1 at 400 V at ambient temperature 40 °C rated value            | 60 A               |
| • at AC-1  |                    |
| — up to 690 V at ambient temperature 40 °C rated value                 | 60 A               |
| — up to 690 V at ambient temperature 60 °C rated value                 | 55 A               |
| • at AC-3  |                    |
| — at 400 V rated value   | 41 A               |
| — at 500 V rated value   | 41 A               |
| — at 690 V rated value   | 24 A               |
| • at AC-3e   |                    |
| — at 400 V rated value   | 41 A               |
| — at 500 V rated value   | 41 A               |
| — at 690 V rated value   | 24 A               |
| • at AC-4 at 400 V rated value   | 35 A               |
| • at AC-5a up to 690 V rated value                                     | 52.8 A             |
| • at AC-5b up to 400 V rated value                                     | 33.2 A             |
| • at AC-6a   |                    |
| — up to 230 V for current peak value n=20 rated value                  | 36.5 A             |
| — up to 400 V for current peak value n=20 rated value                  | 36.5 A             |
| — up to 500 V for current peak value n=20 rated value                  | 36.5 A             |
| — up to 690 V for current peak value n=20 rated value                  | 24 A               |
| • at AC-6a   |                    |
| — up to 230 V for current peak value n=30 rated value                  | 24.2 A             |
| — up to 400 V for current peak value n=30 rated value                  | 24.2 A             |
| — up to 500 V for current peak value n=30 rated value                  | 24.2 A             |
| — up to 690 V for current peak value n=30 rated value                  | 24 A               |
| minimum cross-section in main circuit at maximum AC-1 rated value      | 16 mm <sup>2</sup> |
| <b>operational current for approx. 200000 operating cycles at AC-4</b> |                    |
| • at 400 V rated value   | 22 A               |
| • at 690 V rated value   | 18.5 A             |
| <b>operational current</b>   |                    |
| • <b>at 1 current path at DC-1</b>                                     |                    |
| — at 24 V rated value  | 55 A               |
| — at 60 V rated value  | 23 A               |
| — at 110 V rated value   | 4.5 A              |
| — at 220 V rated value   | 1 A                |
| — at 440 V rated value   | 0.4 A              |
| — at 600 V rated value   | 0.25 A             |
| • <b>with 2 current paths in series at DC-1</b>                        |                    |
| — at 24 V rated value  | 55 A               |
| — at 60 V rated value  | 45 A               |
| — at 110 V rated value   | 45 A               |
| — at 220 V rated value   | 5 A                |
| — at 440 V rated value   | 1 A                |
| — at 600 V rated value   | 0.8 A              |
| • <b>with 3 current paths in series at DC-1</b>                        |                    |
| — at 24 V rated value  | 55 A               |
| — at 60 V rated value  | 55 A               |
| — at 110 V rated value   | 55 A               |
| — at 220 V rated value   | 45 A               |

|   |   |
|---|---|
| — at 440 V rated value  | 2.9 A   |
| — at 600 V rated value  | 1.4 A   |
| <b>● at 1 current path at DC-3 at DC-5</b>                              |   |
| — at 24 V rated value   | 35 A  |
| — at 60 V rated value   | 6 A   |
| — at 220 V rated value  | 1 A   |
| — at 440 V rated value  | 0.1 A   |
| — at 600 V rated value  | 0.06 A  |
| <b>● with 2 current paths in series at DC-3 at DC-5</b>                 |   |
| — at 24 V rated value   | 55 A  |
| — at 60 V rated value   | 45 A  |
| — at 110 V rated value  | 25 A  |
| — at 220 V rated value  | 5 A   |
| — at 440 V rated value  | 0.27 A  |
| — at 600 V rated value  | 0.16 A  |
| <b>● with 3 current paths in series at DC-3 at DC-5</b>                 |   |
| — at 24 V rated value   | 55 A  |
| — at 60 V rated value   | 55 A  |
| — at 110 V rated value  | 55 A  |
| — at 220 V rated value  | 25 A  |
| — at 440 V rated value  | 0.6 A   |
| — at 600 V rated value  | 0.35 A  |
| <b>operating power</b>  |   |
| ● at AC-2 at 400 V rated value  | 18.5 kW   |
| ● at AC-3   |   |
| — at 230 V rated value  | 11 kW   |
| — at 400 V rated value  | 18.5 kW   |
| — at 500 V rated value  | 22 kW   |
| — at 690 V rated value  | 22 kW   |
| ● at AC-3e  |   |
| — at 230 V rated value  | 11 kW   |
| — at 400 V rated value  | 18.5 kW   |
| — at 500 V rated value  | 22 kW   |
| — at 690 V rated value  | 22 kW   |
| <b>operating power for approx. 200000 operating cycles at AC-4</b>      |   |
| ● at 400 V rated value  | 11.6 kW   |
| ● at 690 V rated value  | 16.8 kW   |
| <b>operating apparent power at AC-6a</b>                                |   |
| ● up to 230 V for current peak value n=20 rated value                   | 14.5 kVA  |
| ● up to 400 V for current peak value n=20 rated value                   | 25.2 kVA  |
| ● up to 500 V for current peak value n=20 rated value                   | 31.6 kVA  |
| ● up to 690 V for current peak value n=20 rated value                   | 28.6 kVA  |
| <b>operating apparent power at AC-6a</b>                                |   |
| ● up to 230 V for current peak value n=30 rated value                   | 9.6 kVA   |
| ● up to 400 V for current peak value n=30 rated value                   | 16.8 kVA  |
| ● up to 500 V for current peak value n=30 rated value                   | 21 kVA  |
| ● up to 690 V for current peak value n=30 rated value                   | 28.6 kVA  |
| <b>short-time withstand current in cold operating state up to 40 °C</b> |   |
| ● limited to 1 s switching at zero current maximum                      | 843 A; Use minimum cross-section acc. to AC-1 rated value |
| ● limited to 5 s switching at zero current maximum                      | 596 A; Use minimum cross-section acc. to AC-1 rated value |
| ● limited to 10 s switching at zero current maximum                     | 400 A; Use minimum cross-section acc. to AC-1 rated value |
| ● limited to 30 s switching at zero current maximum                     | 241 A; Use minimum cross-section acc. to AC-1 rated value |
| ● limited to 60 s switching at zero current maximum                     | 196 A; Use minimum cross-section acc. to AC-1 rated value |
| <b>no-load switching frequency</b>                                      |   |
| ● at AC   | 5 000 1/h   |
| <b>operating frequency</b>  |   |
| ● at AC-1 maximum   | 1 200 1/h   |
| ● at AC-2 maximum   | 750 1/h   |
| ● at AC-3 maximum   | 1 000 1/h   |

|   |   |
|---|---|
| <ul style="list-style-type: none"> <li>• at AC-3e <ul style="list-style-type: none"> <li>— maximum</li> </ul> </li> <li>• at AC-4 maximum</li> </ul>  | <p>1 000 1/h</p> <p>300 1/h</p>   |
| <b>Control circuit/ Control</b>   |   |
| <b>type of voltage of the control supply voltage</b>  | AC  |
| <b>control supply voltage at AC</b>   |   |
| <ul style="list-style-type: none"> <li>• at 50 Hz rated value</li> </ul>  | 24 V  |
| <b>operating range factor control supply voltage rated value of magnet coil at AC</b>   |   |
| <ul style="list-style-type: none"> <li>• at 50 Hz</li> </ul>  | 0.8 ... 1.1   |
| <b>apparent pick-up power of magnet coil at AC</b>  |   |
| <ul style="list-style-type: none"> <li>• at 50 Hz</li> </ul>  | 190 VA  |
| <b>inductive power factor with closing power of the coil</b>  |   |
| <ul style="list-style-type: none"> <li>• at 50 Hz</li> </ul>  | 0.72  |
| <b>apparent holding power of magnet coil at AC</b>  |   |
| <ul style="list-style-type: none"> <li>• at 50 Hz</li> </ul>  | 16 VA   |
| <b>inductive power factor with the holding power of the coil</b>  |   |
| <ul style="list-style-type: none"> <li>• at 50 Hz</li> </ul>  | 0.37  |
| <b>closing delay</b>  |   |
| <ul style="list-style-type: none"> <li>• at AC</li> </ul>   | 10 ... 80 ms  |
| <b>opening delay</b>  |   |
| <ul style="list-style-type: none"> <li>• at AC</li> </ul>   | 10 ... 18 ms  |
| <b>arcing time</b>  | 10 ... 20 ms  |
| <b>control version of the switch operating mechanism</b>  | Standard A1 - A2  |
| <b>Auxiliary circuit</b>  |   |
| number of NC contacts for auxiliary contacts instantaneous contact  | 1   |
| number of NO contacts for auxiliary contacts instantaneous contact  | 1   |
| operational current at AC-12 maximum  | 10 A  |
| <b>operational current at AC-15</b>   |   |
| <ul style="list-style-type: none"> <li>• at 230 V rated value</li> <li>• at 400 V rated value</li> <li>• at 500 V rated value</li> <li>• at 690 V rated value</li> </ul>  | <p>10 A</p> <p>3 A</p> <p>2 A</p> <p>1 A</p>  |
| <b>operational current at DC-12</b>   |   |
| <ul style="list-style-type: none"> <li>• at 24 V rated value</li> <li>• at 48 V rated value</li> <li>• at 60 V rated value</li> <li>• at 110 V rated value</li> <li>• at 125 V rated value</li> <li>• at 220 V rated value</li> <li>• at 600 V rated value</li> </ul> | <p>10 A</p> <p>6 A</p> <p>6 A</p> <p>3 A</p> <p>2 A</p> <p>1 A</p> <p>0.15 A</p>    |
| <b>operational current at DC-13</b>   |   |
| <ul style="list-style-type: none"> <li>• at 24 V rated value</li> <li>• at 48 V rated value</li> <li>• at 60 V rated value</li> <li>• at 110 V rated value</li> <li>• at 125 V rated value</li> <li>• at 220 V rated value</li> <li>• at 600 V rated value</li> </ul> | <p>10 A</p> <p>2 A</p> <p>2 A</p> <p>1 A</p> <p>0.9 A</p> <p>0.3 A</p> <p>0.1 A</p> |
| <b>contact reliability of auxiliary contacts</b>  | 1 faulty switching per 100 million (17 V, 1 mA)                                     |
| <b>UL/CSA ratings</b>   |   |
| <b>full-load current (FLA) for 3-phase AC motor</b>   |   |
| <ul style="list-style-type: none"> <li>• at 480 V rated value</li> <li>• at 600 V rated value</li> </ul>  | <p>40 A</p> <p>41 A</p>   |
| <b>yielded mechanical performance [hp]</b>  |   |
| <ul style="list-style-type: none"> <li>• for single-phase AC motor <ul style="list-style-type: none"> <li>— at 110/120 V rated value</li> <li>— at 230 V rated value</li> </ul> </li> <li>• for 3-phase AC motor</li> </ul>   | <p>3 hp</p> <p>7.5 hp</p>   |

|   |  |
|---|--|
| — at 200/208 V rated value  | 10 hp  |
| — at 220/230 V rated value  | 15 hp  |
| — at 460/480 V rated value  | 30 hp  |
| — at 575/600 V rated value  | 40 hp  |
| <b>contact rating of auxiliary contacts according to UL</b>   | A600 / P600  |
| <b>Short-circuit protection</b>   |  |
| design of the miniature circuit breaker for short-circuit protection of the auxiliary circuit up to 230 V   | C characteristic: 10 A; 0.4 kA   |
| <b>design of the fuse link</b>  |  |
| <ul style="list-style-type: none"> <li>● for short-circuit protection of the main circuit <ul style="list-style-type: none"> <li>— with type of coordination 1 required</li> </ul> </li> <li>— with type of coordination 2 required</li> <li>● for short-circuit protection of the auxiliary switch required</li> </ul>   | gG: 160 A (690 V, 100 kA), aM: 80 A (690 V, 100 kA), BS88: 125 A (415 V, 80 kA)<br>gG: 80 A (690 V, 100 kA), aM: 50 A (690 V, 100 kA), BS88: 63 A (415 V, 80 kA)<br>gG: 10 A (500 V, 1 kA) |
| <b>Installation/ mounting/ dimensions</b>   |  |
| <b>mounting position</b>  | standing, on horizontal mounting surface   |
| fastening method side-by-side mounting  | Yes  |
| <b>fastening method</b>   | screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715   |
| <b>height</b>   | 114 mm   |
| <b>width</b>  | 55 mm  |
| <b>depth</b>  | 130 mm   |
| <b>required spacing</b>   |  |
| <ul style="list-style-type: none"> <li>● with side-by-side mounting <ul style="list-style-type: none"> <li>— forwards</li> <li>— upwards</li> <li>— downwards</li> <li>— at the side</li> </ul> </li> <li>● for grounded parts <ul style="list-style-type: none"> <li>— forwards</li> <li>— upwards</li> <li>— at the side</li> <li>— downwards</li> </ul> </li> <li>● for live parts <ul style="list-style-type: none"> <li>— forwards</li> <li>— upwards</li> <li>— downwards</li> <li>— at the side</li> </ul> </li> </ul> | 10 mm<br>10 mm<br>10 mm<br>0 mm<br>10 mm<br>10 mm<br>6 mm<br>10 mm<br>10 mm<br>10 mm<br>10 mm<br>6 mm  |
| <b>Connections/ Terminals</b>   |  |
| <b>type of electrical connection</b>  |  |
| <ul style="list-style-type: none"> <li>● for main current circuit</li> <li>● for auxiliary and control circuit</li> <li>● at contactor for auxiliary contacts</li> <li>● of magnet coil</li> </ul>  | screw-type terminals<br>spring-loaded terminals<br>Spring-type terminals<br>Spring-type terminals  |
| <b>type of connectable conductor cross-sections</b>   |  |
| <ul style="list-style-type: none"> <li>● for main contacts <ul style="list-style-type: none"> <li>— solid or stranded</li> <li>— finely stranded with core end processing</li> </ul> </li> <li>● for AWG cables for main contacts</li> </ul>  | 2x (1 ... 35 mm <sup>2</sup> ), 1x (1 ... 50 mm <sup>2</sup> )<br>2x (1 ... 25 mm <sup>2</sup> ), 1x (1 ... 35 mm <sup>2</sup> )<br>2x (18 ... 2), 1x (18 ... 1)                           |
| <b>connectable conductor cross-section for main contacts</b>  |  |
| <ul style="list-style-type: none"> <li>● finely stranded with core end processing</li> </ul>  | 1 ... 35 mm <sup>2</sup>   |
| <b>connectable conductor cross-section for auxiliary contacts</b>   |  |
| <ul style="list-style-type: none"> <li>● solid or stranded</li> <li>● finely stranded with core end processing</li> <li>● finely stranded without core end processing</li> </ul>  | 0.5 ... 2.5 mm <sup>2</sup><br>0.5 ... 1.5 mm <sup>2</sup><br>0.5 ... 2.5 mm <sup>2</sup>  |
| <b>type of connectable conductor cross-sections</b>   |  |
| <ul style="list-style-type: none"> <li>● for auxiliary contacts <ul style="list-style-type: none"> <li>— solid or stranded</li> <li>— finely stranded with core end processing</li> <li>— finely stranded without core end processing</li> </ul> </li> <li>● for AWG cables for auxiliary contacts</li> </ul>   | 2x (0.5 ... 2.5 mm <sup>2</sup> )<br>2x (0.5 ... 1.5 mm <sup>2</sup> )<br>2x (0.5 ... 2.5 mm <sup>2</sup> )<br>2x (20 ... 14)  |
| <b>AWG number as coded connectable conductor cross</b>  | 18 ... 1   |

|   |  |
|---|--|
| <b>section for main contacts</b>  |  |
| <b>AWG number as coded connectable conductor cross section for auxiliary contacts</b>   | 20 ... 14  |
| <b>Safety related data</b>  |  |
| <b>product function</b>   |  |
| • mirror contact according to IEC 60947-4-1   | Yes  |
| • positively driven operation according to IEC 60947-5-1  | No   |
| • suitable for safety function  | Yes  |
| suitability for use safety-related switching OFF  | Yes  |
| <b>service life maximum</b>   | 20 a   |
| <b>test wear-related service life necessary</b>   | Yes  |
| <b>proportion of dangerous failures</b>   |  |
| • with low demand rate according to SN 31920  | 40 %   |
| • with high demand rate according to SN 31920   | 73 %   |
| <b>B10 value with high demand rate according to SN 31920</b>  | 1 000 000  |
| <b>failure rate [FIT] with low demand rate according to SN 31920</b>  | 100 FIT  |
| <b>ISO 13849</b>  |  |
| <b>device type according to ISO 13849-1</b>   | 3  |
| <b>overdimensioning according to ISO 13849-2 necessary</b>  | Yes  |
| <b>IEC 61508</b>  |  |
| <b>safety device type according to IEC 61508-2</b>  | Type A   |
| <b>Electrical Safety</b>  |  |
| <b>protection class IP on the front according to IEC 60529</b>  | IP20   |
| <b>touch protection on the front according to IEC 60529</b>   | finger-safe, for vertical contact from the front |
| <b>Further information</b>  |  |
| <p>Information on the packaging<br/> <a href="https://support.industry.siemens.com/cs/ww/en/view/109813875">https://support.industry.siemens.com/cs/ww/en/view/109813875</a></p> <p>Information for data generation and storage<br/> <a href="https://support.industry.siemens.com/cs/ww/en/view/109995012">https://support.industry.siemens.com/cs/ww/en/view/109995012</a></p> <p>Information- and Downloadcenter (Catalogs, Brochures,...)<br/> <a href="https://www.siemens.com/ic10">https://www.siemens.com/ic10</a></p> <p>Industry Mall (Online ordering system)<br/> <a href="https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RT2035-3AB00-1AA0">https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RT2035-3AB00-1AA0</a></p> <p>Cax online generator<br/> <a href="https://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&amp;mlfb=3RT2035-3AB00-1AA0">https://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&amp;mlfb=3RT2035-3AB00-1AA0</a></p> <p>Service&amp;Support (Manuals, Certificates, Characteristics, FAQs,...)<br/> <a href="https://support.industry.siemens.com/cs/ww/en/ps/3RT2035-3AB00-1AA0">https://support.industry.siemens.com/cs/ww/en/ps/3RT2035-3AB00-1AA0</a></p> <p>Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)<br/> <a href="https://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RT2035-3AB00-1AA0&amp;lang=en">https://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RT2035-3AB00-1AA0&amp;lang=en</a></p> <p>Characteristic: Tripping characteristics, I<sup>t</sup>, Let-through current<br/> <a href="https://support.industry.siemens.com/cs/ww/en/ps/3RT2035-3AB00-1AA0/char">https://support.industry.siemens.com/cs/ww/en/ps/3RT2035-3AB00-1AA0/char</a></p> <p>Further characteristics (e.g. electrical endurance, switching frequency)<br/> <a href="https://www.automation.siemens.com/bilddb/index.aspx?view=Search&amp;mlfb=3RT2035-3AB00-1AA0&amp;objecttype=14&amp;gridview=view1">https://www.automation.siemens.com/bilddb/index.aspx?view=Search&amp;mlfb=3RT2035-3AB00-1AA0&amp;objecttype=14&amp;gridview=view1</a></p> |  |

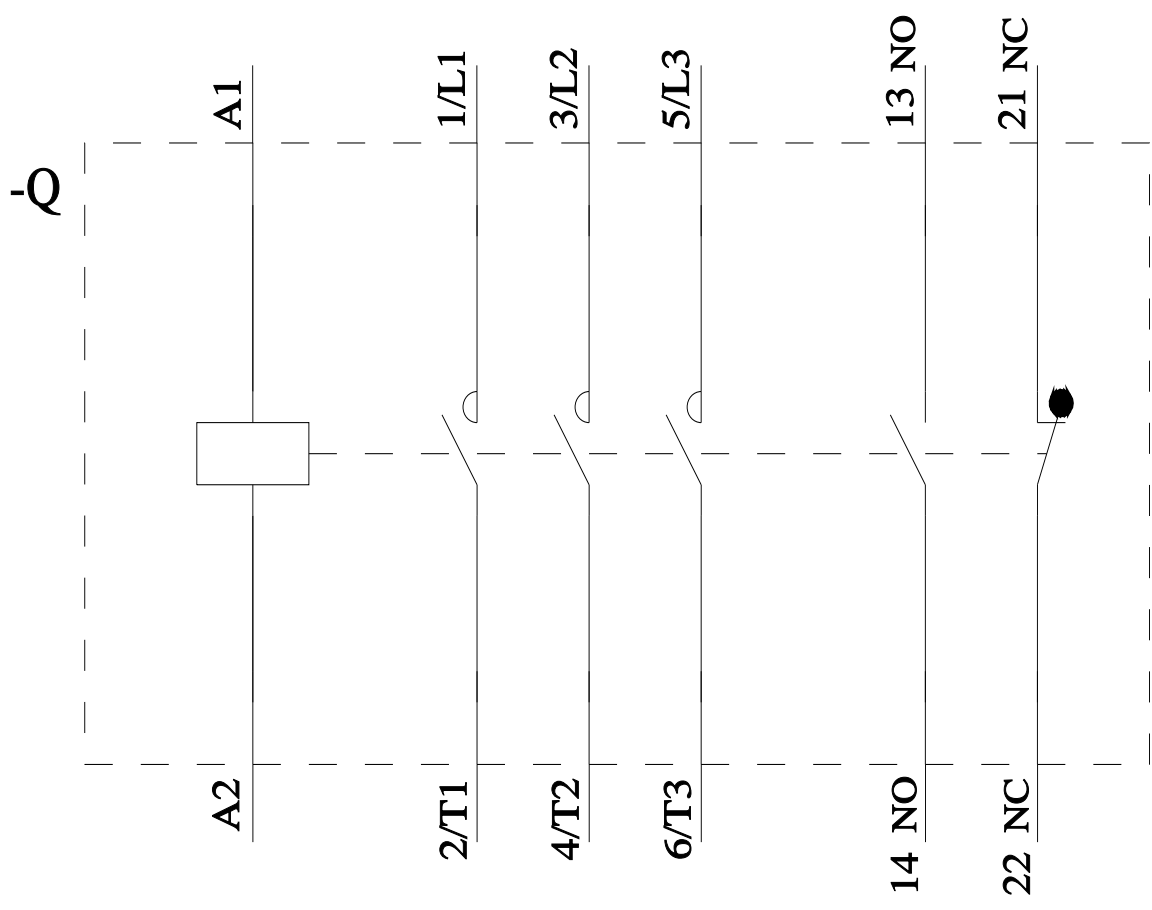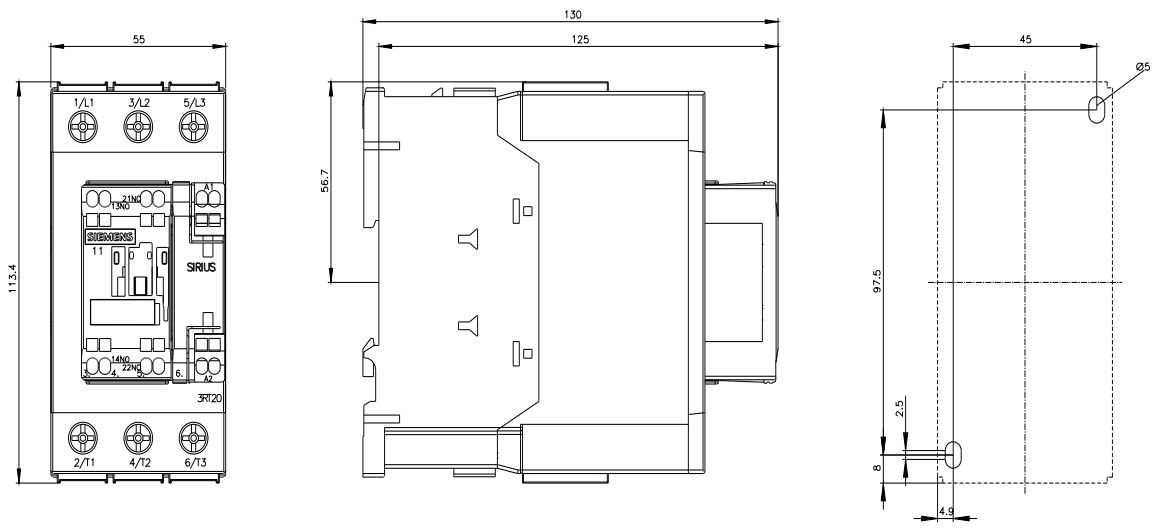

last modified: 10/21/2025

