

Siemens  
EcoTech



Circuit breaker size S0 for motor protection, CLASS 10 A-release 27...32 A N-release 400 A Spring-type terminal Standard switching capacity



|   |  |
|---|--|
| product brand name  | SIRIUS                                     |
| product designation   | Circuit breaker                            |
| design of the product   | For motor protection                       |
| product type designation  | 3RV2                                       |
| <b>General technical data</b>                                   |  |
| size of the circuit-breaker                                     | S0   |
| size of contactor can be combined company-specific              | S00, S0                                    |
| product extension auxiliary switch                              | Yes  |
| power loss [W] for rated value of the current                   |  |
| • at AC in hot operating state                                  | 13.25 W                                    |
| • at AC in hot operating state per pole                         | 4.4 W                                      |
| insulation voltage with degree of pollution 3 at AC rated value | 690 V                                      |
| surge voltage resistance rated value                            | 6 kV                                       |
| shock resistance according to IEC 60068-2-27                    | 25g / 11 ms                                |
| mechanical service life (operating cycles)                      |  |
| • of the main contacts typical                                  | 100 000                                    |
| • of auxiliary contacts typical                                 | 100 000                                    |
| electrical endurance (operating cycles) typical                 | 100 000                                    |
| reference code according to IEC 81346-2                         | Q  |
| Substance Prohibitance (Date)                                   | 10/01/2009                                 |
| SVHC substance name   | Lead titanium zirconium oxide - 12626-81-2 |
| Weight  | 432.5 g                                    |
| <b>Ambient conditions</b>                                       |  |
| installation altitude at height above sea level maximum         | 2 000 m                                    |
| ambient temperature   |  |
| • during operation  | -20 ... +60 °C                             |
| • during storage  | -50 ... +80 °C                             |
| • during transport  | -50 ... +80 °C                             |
| relative humidity during operation                              | 10 ... 95 %                                |
| <b>Environmental footprint</b>                                  |  |
| Environmental Product Declaration(EPD)                          | Yes  |
| global warming potential [CO2 eq] total                         | 75.078 kg                                  |
| global warming potential [CO2 eq] during manufacturing          | 2.68 kg                                    |
| global warming potential [CO2 eq] during sales                  | 0.143 kg                                   |
| global warming potential [CO2 eq] during operation              | 72.7 kg                                    |
| global warming potential [CO2 eq] after end of life             | -0.445 kg                                  |
| Siemens Eco Profile (SEP)                                       | Siemens EcoTech                            |

| Main circuit  |  |
|---|--|
| number of poles for main current circuit  | 3  |
| adjustable current response value current of the current-dependent overload release   | 27 ... 32 A  |
| type of voltage for main current circuit  | AC   |
| operating voltage <ul style="list-style-type: none"> <li>• rated value</li> <li>• at AC-3 rated value maximum</li> <li>• at AC-3e rated value maximum</li> </ul>  | 20 ... 690 V<br>690 V<br>690 V   |
| operating frequency rated value   | 50 ... 60 Hz   |
| operational current rated value   | 32 A   |
| operational current <ul style="list-style-type: none"> <li>• at AC-3 at 400 V rated value</li> <li>• at AC-3e at 400 V rated value</li> </ul>   | 32 A<br>32 A   |
| operating power <ul style="list-style-type: none"> <li>• at AC-3 <ul style="list-style-type: none"> <li>— at 230 V rated value</li> <li>— at 400 V rated value</li> <li>— at 500 V rated value</li> <li>— at 690 V rated value</li> </ul> </li> <li>• at AC-3e <ul style="list-style-type: none"> <li>— at 230 V rated value</li> <li>— at 400 V rated value</li> <li>— at 500 V rated value</li> <li>— at 690 V rated value</li> </ul> </li> </ul> | 7.5 kW<br>15 kW<br>18.5 kW<br>30 kW<br>7.5 kW<br>15 kW<br>18.5 kW<br>30 kW |
| operating frequency <ul style="list-style-type: none"> <li>• at AC-3 maximum</li> <li>• at AC-3e maximum</li> </ul>   | 15 1/h<br>15 1/h   |
| Auxiliary circuit   |  |
| type of voltage for auxiliary and control circuit   | AC/DC  |
| number of NC contacts for auxiliary contacts  | 0  |
| number of NO contacts for auxiliary contacts  | 0  |
| number of CO contacts for auxiliary contacts  | 0  |
| Protective and monitoring functions   |  |
| product function <ul style="list-style-type: none"> <li>• ground fault detection</li> <li>• phase failure detection</li> </ul>  | No<br>Yes  |
| trip class  | CLASS 10   |
| design of the overload release  | thermal  |
| maximum short-circuit current breaking capacity (Icu) <ul style="list-style-type: none"> <li>• at AC at 240 V rated value</li> <li>• at AC at 400 V rated value</li> <li>• at AC at 500 V rated value</li> <li>• at AC at 690 V rated value</li> </ul>  | 100 kA<br>55 kA<br>10 kA<br>4 kA   |
| operating short-circuit current breaking capacity (Ics) at AC <ul style="list-style-type: none"> <li>• at 240 V rated value</li> <li>• at 400 V rated value</li> <li>• at 500 V rated value</li> <li>• at 690 V rated value</li> </ul>  | 100 kA<br>25 kA<br>5 kA<br>2 kA  |
| response value current of instantaneous short-circuit trip unit   | 400 A  |
| UL/CSA ratings  |  |
| full-load current (FLA) for 3-phase AC motor <ul style="list-style-type: none"> <li>• at 480 V rated value</li> <li>• at 600 V rated value</li> </ul>   | 32 A<br>32 A   |
| yielded mechanical performance [hp] <ul style="list-style-type: none"> <li>• for single-phase AC motor <ul style="list-style-type: none"> <li>— at 110/120 V rated value</li> <li>— at 230 V rated value</li> </ul> </li> <li>• for 3-phase AC motor <ul style="list-style-type: none"> <li>— at 200/208 V rated value</li> <li>— at 220/230 V rated value</li> </ul> </li> </ul>   | 2 hp<br>5 hp<br>7.5 hp<br>10 hp  |

|  |  |
|--|--|
| — at 460/480 V rated value   | 20 hp  |
| <b>Category Control Number (CCN)</b>   | E156943 (NKJH, NKJH7)  |
| <b>Short-circuit protection</b>  |  |
| <b>product function short circuit protection</b>   | Yes  |
| <b>design of the short-circuit trip</b>  | magnetic   |
| <b>design of the fuse link for IT network for short-circuit protection of the main circuit</b> |  |
| • at 400 V   | gL/gG 63 A   |
| • at 500 V   | gL/gG 63 A   |
| • at 690 V   | gL/gG 63 A   |
| <b>Installation/ mounting/ dimensions</b>  |  |
| <b>mounting position</b>   | any  |
| <b>fastening method</b>  | screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 |
| <b>height</b>  | 119 mm   |
| <b>width</b>   | 45 mm  |
| <b>depth</b>   | 97 mm  |
| <b>required spacing</b>  |  |
| • with side-by-side mounting at the side   | 0 mm   |
| • for grounded parts at 400 V  |  |
| — downwards  | 30 mm  |
| — upwards  | 30 mm  |
| — at the side  | 9 mm   |
| • for live parts at 400 V  |  |
| — downwards  | 30 mm  |
| — upwards  | 30 mm  |
| — at the side  | 9 mm   |
| • for grounded parts at 500 V  |  |
| — downwards  | 30 mm  |
| — upwards  | 30 mm  |
| — at the side  | 9 mm   |
| • for live parts at 500 V  |  |
| — downwards  | 30 mm  |
| — upwards  | 30 mm  |
| — at the side  | 9 mm   |
| • for grounded parts at 690 V  |  |
| — downwards  | 50 mm  |
| — upwards  | 50 mm  |
| — backwards  | 0 mm   |
| — at the side  | 30 mm  |
| — forwards   | 0 mm   |
| • for live parts at 690 V  |  |
| — downwards  | 50 mm  |
| — upwards  | 50 mm  |
| — backwards  | 0 mm   |
| — at the side  | 30 mm  |
| — forwards   | 0 mm   |
| <b>Connections/ Terminals</b>  |  |
| <b>type of electrical connection</b>   |  |
| • for main current circuit   | spring-loaded terminals  |
| <b>arrangement of electrical connectors for main current circuit</b>                           | Top and bottom   |
| <b>type of connectable conductor cross-sections</b>  |  |
| • for main contacts  |  |
| — solid or stranded  | 2x (1 ... 10 mm <sup>2</sup> )   |
| — finely stranded with core end processing   | 2x (1 ... 6 mm <sup>2</sup> )  |
| — finely stranded without core end processing  | 2x (1 ... 6 mm <sup>2</sup> )  |
| • for AWG cables for main contacts   | 2x (18 ... 8)  |
| <b>design of screwdriver shaft</b>   | Diameter 3 mm  |
| <b>size of the screwdriver tip</b>   | 3,0 x 0,5 mm   |
| <b>Safety related data</b>   |  |
| product function suitable for safety function  | Yes  |

|  |  |
|--|--|
| <b>suitability for use</b>   |  |
| • safety-related switching on  | No   |
| • safety-related switching OFF                                       | Yes  |
| <b>service life maximum</b>  | 10 a   |
| <b>test wear-related service life necessary</b>                      | Yes  |
| <b>proportion of dangerous failures</b>                              |  |
| • with low demand rate according to SN 31920                         | 40 %   |
| • with high demand rate according to SN 31920                        | 50 %   |
| <b>B10 value with high demand rate according to SN 31920</b>         | 5 000  |
| <b>failure rate [FIT] with low demand rate according to SN 31920</b> | 50 FIT   |
| <b>ISO 13849</b>   |  |
| <b>device type according to ISO 13849-1</b>                          | 3  |
| <b>overdimensioning according to ISO 13849-2 necessary</b>           | Yes  |
| <b>IEC 61508</b>   |  |
| <b>safety device type according to IEC 61508-2</b>                   | Type A   |
| <b>T1 value</b>  |  |
| • for proof test interval or service life according to IEC 61508     | 10 a   |
| <b>Electrical Safety</b>   |  |
| <b>protection class IP on the front according to IEC 60529</b>       | IP20   |
| <b>touch protection on the front according to IEC 60529</b>          | finger-safe, for vertical contact from the front |
| <b>Display</b>   |  |
| display version for switching status                                 | Handle   |
| <b>Approvals Certificates</b>  |  |
| <b>General Product Approval</b>                                      |  |



[KC](#)



|                                 |                                       |                          |
|---------------------------------|---------------------------------------|--------------------------|
| <b>General Product Approval</b> | <b>For use in hazardous locations</b> | <b>Test Certificates</b> |
|---------------------------------|---------------------------------------|--------------------------|



[Type Test Certificates/Test Report](#)

[Special Test Certificate](#)

|                             |
|-----------------------------|
| <b>Maritime application</b> |
|-----------------------------|



|              |                |
|--------------|----------------|
| <b>other</b> | <b>Railway</b> |
|--------------|----------------|

[Miscellaneous](#)



[Confirmation](#)



[Special Test Certificate](#)

[Confirmation](#)

|                    |
|--------------------|
| <b>Environment</b> |
|--------------------|



Siemens EcoTech



[Environmental Confirmations](#)

## Further information

### Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

### Information for data generation and storage

<https://support.industry.siemens.com/cs/ww/en/view/109995012>

### Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

### Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RV2021-4EA20>

### Cax online generator

<https://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RV2021-4EA20>

### Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RV2021-4EA20>

### Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)


[https://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3RV2021-4EA20&lang=en](https://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RV2021-4EA20&lang=en)


### Characteristic: Tripping characteristics, I<sup>2</sup>t, Let-through current

<https://support.industry.siemens.com/cs/ww/en/ps/3RV2021-4EA20/char>

### Further characteristics (e.g. electrical endurance, switching frequency)

<https://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RV2021-4EA20&objecttype=14&gridview=view1>

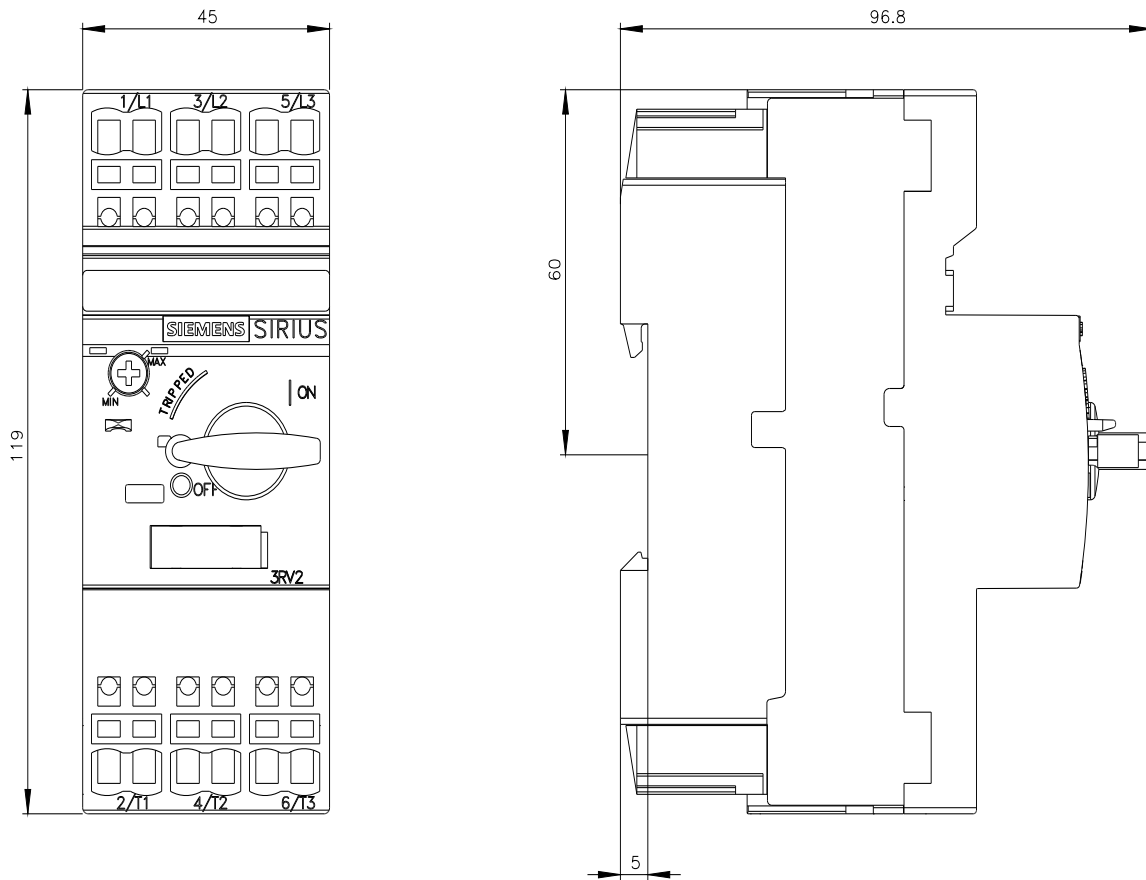

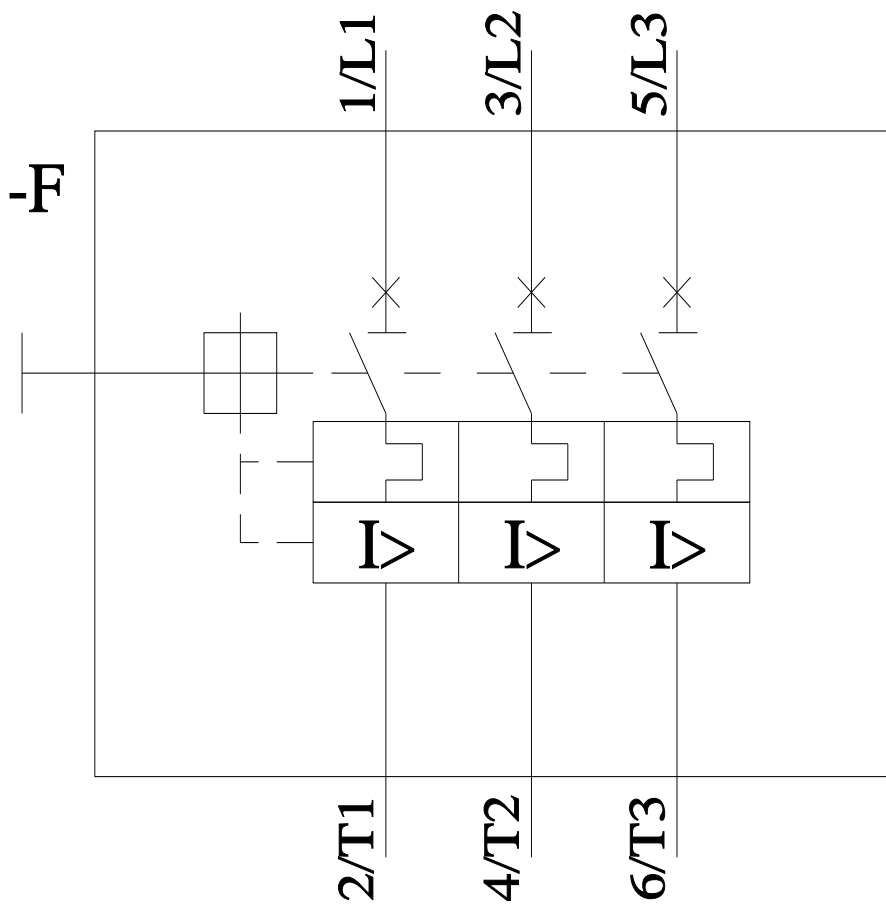

last modified:

11/13/2025