

Siemens  
EcoTech



Circuit breaker size S0 for motor protection, CLASS 10 A-release 23...28 A N-release 364 A screw terminal Standard switching capacity with transverse auxiliary switches 1 NO+1 NC



|   |  |
|---|--|
| product brand name  | SIRIUS   |
| product designation   | Circuit breaker  |
| design of the product   | For motor protection   |
| product type designation  | 3RV2   |
| <b>General technical data</b>                                   |  |
| size of the circuit-breaker                                     | S0   |
| size of contactor can be combined company-specific              | S00, S0  |
| product extension auxiliary switch                              | Yes  |
| power loss [W] for rated value of the current                   |  |
| • at AC in hot operating state                                  | 13.25 W  |
| • at AC in hot operating state per pole                         | 4.4 W  |
| insulation voltage with degree of pollution 3 at AC rated value | 690 V  |
| surge voltage resistance rated value                            | 6 kV   |
| shock resistance according to IEC 60068-2-27                    | 25g / 11 ms  |
| mechanical service life (operating cycles)                      |  |
| • of the main contacts typical                                  | 100 000  |
| • of auxiliary contacts typical                                 | 100 000  |
| electrical endurance (operating cycles) typical                 | 100 000  |
| reference code according to IEC 81346-2                         | Q  |
| Substance Prohibitance (Date)                                   | 10/01/2009   |
| SVHC substance name   | Lead - 7439-92-1<br>Lead titanium zirconium oxide - 12626-81-2 |
| Weight  | 0.398 kg   |
| <b>Ambient conditions</b>                                       |  |
| installation altitude at height above sea level maximum         | 2 000 m  |
| ambient temperature   |  |
| • during operation  | -20 ... +60 °C   |
| • during storage  | -50 ... +80 °C   |
| • during transport  | -50 ... +80 °C   |
| relative humidity during operation                              | 10 ... 95 %  |
| <b>Environmental footprint</b>                                  |  |
| Environmental Product Declaration (EPD)                         | Yes  |
| global warming potential [CO2 eq] total                         | 75.078 kg  |
| global warming potential [CO2 eq] during manufacturing          | 2.68 kg  |
| global warming potential [CO2 eq] during sales                  | 0.143 kg   |
| global warming potential [CO2 eq] during operation              | 72.7 kg  |
| global warming potential [CO2 eq] after end of life             | -0.445 kg  |

| Siemens Eco Profile (SEP)  | Siemens EcoTech |
|--|-----------------|
| <b>Main circuit</b>  |                 |
| <b>number of poles for main current circuit</b>  | 3               |
| <b>adjustable current response value current of the current-dependent overload release</b> | 23 ... 28 A     |
| <b>type of voltage for main current circuit</b>  | AC              |
| <b>operating voltage</b>   |                 |
| • rated value  | 20 ... 690 V    |
| • at AC-3 rated value maximum  | 690 V           |
| • at AC-3e rated value maximum   | 690 V           |
| <b>operating frequency rated value</b>   | 50 ... 60 Hz    |
| <b>operational current rated value</b>   | 28 A            |
| <b>operational current</b>   |                 |
| • at AC-3 at 400 V rated value   | 28 A            |
| • at AC-3e at 400 V rated value  | 28 A            |
| <b>operating power</b>   |                 |
| • at AC-3  |                 |
| — at 230 V rated value   | 7.5 kW          |
| — at 400 V rated value   | 15 kW           |
| — at 500 V rated value   | 18.5 kW         |
| — at 690 V rated value   | 22 kW           |
| • at AC-3e   |                 |
| — at 230 V rated value   | 7.5 kW          |
| — at 400 V rated value   | 15 kW           |
| — at 500 V rated value   | 18.5 kW         |
| — at 690 V rated value   | 22 kW           |
| <b>operating frequency</b>   |                 |
| • at AC-3 maximum  | 15 1/h          |
| • at AC-3e maximum   | 15 1/h          |
| <b>Auxiliary circuit</b>   |                 |
| <b>design of the auxiliary switch</b>  | transverse      |
| <b>type of voltage for auxiliary and control circuit</b>                                   | AC/DC           |
| <b>number of NC contacts for auxiliary contacts</b>  | 1               |
| <b>number of NO contacts for auxiliary contacts</b>  | 1               |
| number of CO contacts for auxiliary contacts   | 0               |
| <b>operational current of auxiliary contacts at AC-15</b>                                  |                 |
| • at 24 V  | 2 A             |
| • at 120 V   | 0.5 A           |
| • at 125 V   | 0.5 A           |
| • at 230 V   | 0.5 A           |
| <b>operational current of auxiliary contacts at DC-13</b>                                  |                 |
| • at 24 V  | 1 A             |
| • at 60 V  | 0.15 A          |
| <b>Protective and monitoring functions</b>   |                 |
| <b>product function</b>  |                 |
| • ground fault detection   | No              |
| • phase failure detection  | Yes             |
| <b>trip class</b>  | CLASS 10        |
| <b>design of the overload release</b>  | thermal         |
| <b>maximum short-circuit current breaking capacity (Icu)</b>                               |                 |
| • at AC at 240 V rated value   | 100 kA          |
| • at AC at 400 V rated value   | 55 kA           |
| • at AC at 500 V rated value   | 10 kA           |
| • at AC at 690 V rated value   | 4 kA            |
| <b>operating short-circuit current breaking capacity (Ics) at AC</b>                       |                 |
| • at 240 V rated value   | 100 kA          |
| • at 400 V rated value   | 25 kA           |
| • at 500 V rated value   | 5 kA            |
| • at 690 V rated value   | 2 kA            |
| response value current of instantaneous short-circuit trip unit                            | 364 A           |
| <b>UL/CSA ratings</b>  |                 |

|  |   |
|--|---|
| <b>full-load current (FLA) for 3-phase AC motor</b>  |   |
| <ul style="list-style-type: none"> <li>● at 480 V rated value</li> <li>● at 600 V rated value</li> </ul>   | <p>28 A</p> <p>28 A</p>   |
| <b>yielded mechanical performance [hp]</b>   |   |
| <ul style="list-style-type: none"> <li>● for single-phase AC motor <ul style="list-style-type: none"> <li>— at 110/120 V rated value</li> <li>— at 230 V rated value</li> </ul> </li> <li>● for 3-phase AC motor <ul style="list-style-type: none"> <li>— at 200/208 V rated value</li> <li>— at 220/230 V rated value</li> <li>— at 460/480 V rated value</li> </ul> </li> </ul>  | <p>2 hp</p> <p>5 hp</p> <p>7.5 hp</p> <p>10 hp</p> <p>20 hp</p>   |
| <b>contact rating of auxiliary contacts according to UL</b>  | C300 / R300   |
| <b>Category Control Number (CCN)</b>   | E156943 (NKJH, NKJH7)   |
| <b>Short-circuit protection</b>  |   |
| <b>product function short circuit protection</b>   | Yes   |
| <b>design of the short-circuit trip</b>  | magnetic  |
| <b>design of the fuse link</b>   |   |
| <ul style="list-style-type: none"> <li>● for short-circuit protection of the auxiliary switch required</li> </ul>  | Fuse gL/gG: 10 A, miniature circuit breaker C 6 A (short-circuit current I <sub>k</sub> < 400 A)  |
| <b>design of the fuse link for IT network for short-circuit protection of the main circuit</b>   |   |
| <ul style="list-style-type: none"> <li>● at 400 V</li> <li>● at 500 V</li> <li>● at 690 V</li> </ul>   | <p>gL/gG 63 A</p> <p>gL/gG 63 A</p> <p>gL/gG 63 A</p>   |
| <b>Installation/ mounting/ dimensions</b>  |   |
| <b>mounting position</b>   | any   |
| <b>fastening method</b>  | screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715  |
| <b>height</b>  | 97 mm   |
| <b>width</b>   | 45 mm   |
| <b>depth</b>   | 97 mm   |
| <b>required spacing</b>  |   |
| <ul style="list-style-type: none"> <li>● with side-by-side mounting at the side</li> <li>● for grounded parts at 400 V <ul style="list-style-type: none"> <li>— downwards</li> <li>— upwards</li> <li>— at the side</li> </ul> </li> <li>● for live parts at 400 V <ul style="list-style-type: none"> <li>— downwards</li> <li>— upwards</li> <li>— at the side</li> </ul> </li> <li>● for grounded parts at 500 V <ul style="list-style-type: none"> <li>— downwards</li> <li>— upwards</li> <li>— at the side</li> </ul> </li> <li>● for live parts at 500 V <ul style="list-style-type: none"> <li>— downwards</li> <li>— upwards</li> <li>— at the side</li> </ul> </li> <li>● for grounded parts at 690 V <ul style="list-style-type: none"> <li>— downwards</li> <li>— upwards</li> <li>— backwards</li> <li>— at the side</li> <li>— forwards</li> </ul> </li> <li>● for live parts at 690 V <ul style="list-style-type: none"> <li>— downwards</li> <li>— upwards</li> <li>— backwards</li> <li>— at the side</li> <li>— forwards</li> </ul> </li> </ul> | <p>0 mm</p> <p>30 mm</p> <p>30 mm</p> <p>9 mm</p> <p>30 mm</p> <p>30 mm</p> <p>9 mm</p> <p>30 mm</p> <p>30 mm</p> <p>9 mm</p> <p>50 mm</p> <p>50 mm</p> <p>0 mm</p> <p>30 mm</p> <p>0 mm</p> <p>50 mm</p> <p>50 mm</p> <p>0 mm</p> <p>30 mm</p> <p>0 mm</p> |
| <b>Connections/ Terminals</b>  |   |

|  |   |
|--|---|
| <b>type of electrical connection</b>   |   |
| <ul style="list-style-type: none"> <li>• for main current circuit</li> <li>• for auxiliary and control circuit</li> </ul>  | <p>screw-type terminals</p> <p>screw-type terminals</p>   |
| <b>arrangement of electrical connectors for main current circuit</b>   | Top and bottom  |
| <b>type of connectable conductor cross-sections</b>  |   |
| <ul style="list-style-type: none"> <li>• for main contacts <ul style="list-style-type: none"> <li>— solid or stranded</li> <li>— finely stranded with core end processing</li> </ul> </li> <li>• for AWG cables for main contacts</li> </ul>           | <p>2x (1 ... 2.5 mm<sup>2</sup>), 2x (2.5 ... 10 mm<sup>2</sup>)</p> <p>2x (1 ... 2.5 mm<sup>2</sup>), 2x (2.5 ... 6 mm<sup>2</sup>), 1x 10 mm<sup>2</sup></p> <p>2x (16 ... 12), 2x (14 ... 8)</p> |
| <b>type of connectable conductor cross-sections</b>  |   |
| <ul style="list-style-type: none"> <li>• for auxiliary contacts <ul style="list-style-type: none"> <li>— solid or stranded</li> <li>— finely stranded with core end processing</li> </ul> </li> <li>• for AWG cables for auxiliary contacts</li> </ul> | <p>2x (0.5 ... 1.5 mm<sup>2</sup>), 2x (0.75 ... 2.5 mm<sup>2</sup>)</p> <p>2x (0.5 ... 1.5 mm<sup>2</sup>), 2x (0.75 ... 2.5 mm<sup>2</sup>)</p> <p>2x (20 ... 16), 2x (18 ... 14)</p>             |
| <b>tightening torque</b>   |   |
| <ul style="list-style-type: none"> <li>• for main contacts with screw-type terminals</li> <li>• for auxiliary contacts with screw-type terminals</li> </ul>  | <p>2 ... 2.5 N·m</p> <p>0.8 ... 1.2 N·m</p>   |
| <b>design of screwdriver shaft</b>   | Diameter 5 to 6 mm  |
| <b>size of the screwdriver tip</b>   | Pozidriv size 2   |
| <b>design of the thread of the connection screw</b>  |   |
| <ul style="list-style-type: none"> <li>• for main contacts</li> <li>• of the auxiliary and control contacts</li> </ul>   | <p>M4</p> <p>M3</p>   |

#### Safety related data

|   |                         |
|---|-------------------------|
| product function suitable for safety function   | Yes                     |
| <b>suitability for use</b>  |                         |
| <ul style="list-style-type: none"> <li>• safety-related switching on</li> <li>• safety-related switching OFF</li> </ul>                               | <p>No</p> <p>Yes</p>    |
| <b>service life maximum</b>   | 10 a                    |
| <b>test wear-related service life necessary</b>   | Yes                     |
| <b>proportion of dangerous failures</b>   |                         |
| <ul style="list-style-type: none"> <li>• with low demand rate according to SN 31920</li> <li>• with high demand rate according to SN 31920</li> </ul> | <p>40 %</p> <p>50 %</p> |
| <b>B10 value with high demand rate according to SN 31920</b>  | 5 000                   |
| <b>failure rate [FIT] with low demand rate according to SN 31920</b>  | 50 FIT                  |

#### ISO 13849

|  |     |
|--|-----|
| <b>device type according to ISO 13849-1</b>                | 3   |
| <b>overdimensioning according to ISO 13849-2 necessary</b> | Yes |

#### IEC 61508

|  |        |
|--|--------|
| <b>safety device type according to IEC 61508-2</b>   | Type A |
| <b>T1 value</b>  |        |
| <ul style="list-style-type: none"> <li>• for proof test interval or service life according to IEC 61508</li> </ul> | 10 a   |

#### Electrical Safety

|  |  |
|--|--|
| <b>protection class IP on the front according to IEC 60529</b> | IP20   |
| <b>touch protection on the front according to IEC 60529</b>    | finger-safe, for vertical contact from the front |

#### Display

|                                      |        |
|--------------------------------------|--------|
| display version for switching status | Handle |
|--------------------------------------|--------|

#### Approvals Certificates

##### General Product Approval



[KC](#)



|                          |                                |                   |
|--------------------------|--------------------------------|-------------------|
| General Product Approval | For use in hazardous locations | Test Certificates |
|--------------------------|--------------------------------|-------------------|



[Type Test Certificates/Test Report](#)

[Special Test Certificate](#)

#### Maritime application



#### other

[Confirmation](#)

[Miscellaneous](#)



#### Railway

[Special Test Certificate](#)

[Confirmation](#)

#### Environment



Siemens EcoTech



[Environmental Confirmations](#)

#### Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information for data generation and storage

<https://support.industry.siemens.com/cs/ww/en/view/109995012>

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RV2021-4NA15>

Cax online generator

<https://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RV2021-4NA15>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RV2021-4NA15>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)


[https://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3RV2021-4NA15&lang=en](https://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RV2021-4NA15&lang=en)

Characteristic: Tripping characteristics, I<sub>t</sub>, Let-through current

<https://support.industry.siemens.com/cs/ww/en/ps/3RV2021-4NA15/char>

Further characteristics (e.g. electrical endurance, switching frequency)

<https://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RV2021-4NA15&objecttype=14&gridview=view1>

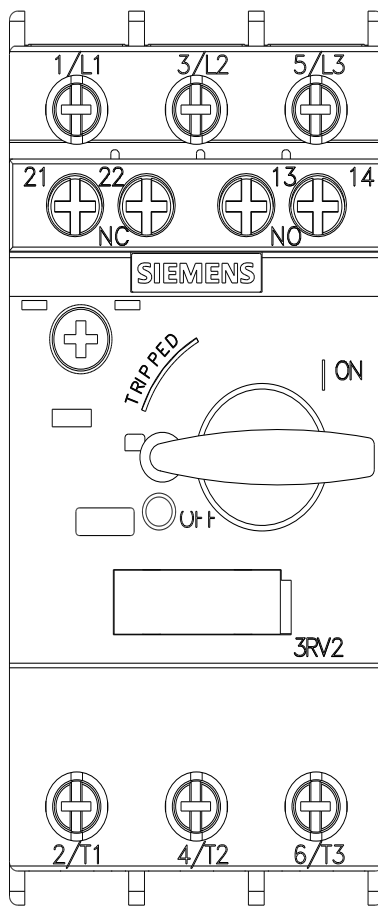



last modified:

11/13/2025 