

Siemens  
EcoTech



Circuit breaker size S00 for transformer protection A-release 2.8...4 A N-release 82  
A screw terminal Standard switching capacity with transverse auxiliary switches 1  
NO+1 NC



|   |                            |
|---|----------------------------|
| product brand name  | SIRIUS                     |
| product designation   | Circuit breaker            |
| design of the product   | For transformer protection |
| product type designation  | 3RV2                       |
| <b>General technical data</b>                                   |                            |
| size of the circuit-breaker                                     | S00                        |
| size of contactor can be combined company-specific              | S00, S0                    |
| product extension auxiliary switch                              | Yes                        |
| power loss [W] for rated value of the current                   |                            |
| • at AC in hot operating state                                  | 7.25 W                     |
| • at AC in hot operating state per pole                         | 2.4 W                      |
| insulation voltage with degree of pollution 3 at AC rated value | 690 V                      |
| surge voltage resistance rated value                            | 6 kV                       |
| shock resistance according to IEC 60068-2-27                    | 25g / 11 ms                |
| mechanical service life (operating cycles)                      |                            |
| • of the main contacts typical                                  | 100 000                    |
| • of auxiliary contacts typical                                 | 100 000                    |
| electrical endurance (operating cycles) typical                 | 100 000                    |
| reference code according to IEC 81346-2                         | Q                          |
| Substance Prohibitance (Date)                                   | 10/01/2009                 |
| Weight  | 0.361 kg                   |
| <b>Ambient conditions</b>                                       |                            |
| installation altitude at height above sea level maximum         | 2 000 m                    |
| ambient temperature   |                            |
| • during operation  | -20 ... +60 °C             |
| • during storage  | -50 ... +80 °C             |
| • during transport  | -50 ... +80 °C             |
| relative humidity during operation                              | 10 ... 95 %                |
| <b>Environmental footprint</b>                                  |                            |
| Environmental Product Declaration(EPD)                          | Yes                        |
| global warming potential [CO2 eq] total                         | 74.698 kg                  |
| global warming potential [CO2 eq] during manufacturing          | 1.98 kg                    |
| global warming potential [CO2 eq] during sales                  | 0.134 kg                   |
| global warming potential [CO2 eq] during operation              | 72.7 kg                    |
| global warming potential [CO2 eq] after end of life             | -0.116 kg                  |
| Siemens Eco Profile (SEP)                                       | Siemens EcoTech            |
| <b>Main circuit</b>   |                            |

|  |              |
|--|--------------|
| <b>number of poles for main current circuit</b>  | 3            |
| <b>adjustable current response value current of the current-dependent overload release</b> | 2.8 ... 4 A  |
| <b>type of voltage for main current circuit</b>  | AC           |
| <b>operating voltage</b>   |              |
| • rated value  | 20 ... 690 V |
| • at AC-3 rated value maximum  | 690 V        |
| • at AC-3e rated value maximum   | 690 V        |
| <b>operating frequency rated value</b>   | 50 ... 60 Hz |
| <b>operational current rated value</b>   | 4 A          |
| <b>operational current</b>   |              |
| • at AC-3 at 400 V rated value   | 4 A          |
| • at AC-3e at 400 V rated value  | 4 A          |
| <b>operating power</b>   |              |
| • at AC-3  |              |
| — at 230 V rated value   | 0.8 kW       |
| — at 400 V rated value   | 1.5 kW       |
| — at 500 V rated value   | 2.2 kW       |
| — at 690 V rated value   | 3 kW         |
| • at AC-3e   |              |
| — at 230 V rated value   | 0.8 kW       |
| — at 400 V rated value   | 1.5 kW       |
| — at 500 V rated value   | 2.2 kW       |
| — at 690 V rated value   | 3 kW         |
| <b>operating frequency</b>   |              |
| • at AC-3 maximum  | 15 1/h       |
| • at AC-3e maximum   | 15 1/h       |
| <b>Auxiliary circuit</b>   |              |
| <b>design of the auxiliary switch</b>  | transverse   |
| <b>type of voltage for auxiliary and control circuit</b>                                   | AC/DC        |
| <b>number of NC contacts for auxiliary contacts</b>  | 1            |
| <b>number of NO contacts for auxiliary contacts</b>  | 1            |
| <b>number of CO contacts for auxiliary contacts</b>  | 0            |
| <b>operational current of auxiliary contacts at AC-15</b>                                  |              |
| • at 24 V  | 2 A          |
| • at 120 V   | 0.5 A        |
| • at 125 V   | 0.5 A        |
| • at 230 V   | 0.5 A        |
| <b>operational current of auxiliary contacts at DC-13</b>                                  |              |
| • at 24 V  | 1 A          |
| • at 60 V  | 0.15 A       |
| <b>Protective and monitoring functions</b>   |              |
| <b>product function</b>  |              |
| • ground fault detection   | No           |
| • phase failure detection  | Yes          |
| <b>trip class</b>  | CLASS 10     |
| <b>design of the overload release</b>  | thermal      |
| <b>maximum short-circuit current breaking capacity (I<sub>cu</sub>)</b>                    |              |
| • at AC at 240 V rated value   | 100 kA       |
| • at AC at 400 V rated value   | 100 kA       |
| • at AC at 500 V rated value   | 100 kA       |
| • at AC at 690 V rated value   | 6 kA         |
| <b>operating short-circuit current breaking capacity (I<sub>cs</sub>) at AC</b>            |              |
| • at 240 V rated value   | 100 kA       |
| • at 400 V rated value   | 100 kA       |
| • at 500 V rated value   | 100 kA       |
| • at 690 V rated value   | 4 kA         |
| <b>response value current of instantaneous short-circuit trip unit</b>                     | 82 A         |
| <b>UL/CSA ratings</b>  |              |
| <b>full-load current (FLA) for 3-phase AC motor</b>  |              |
| • at 480 V rated value   | 4 A          |

|  |  |
|--|--|
| <ul style="list-style-type: none"> <li>• at 600 V rated value</li> </ul>   | 4 A  |
| <b>yielded mechanical performance [hp]</b>   |  |
| <ul style="list-style-type: none"> <li>• for single-phase AC motor <ul style="list-style-type: none"> <li>— at 110/120 V rated value</li> <li>— at 230 V rated value</li> </ul> </li> <li>• for 3-phase AC motor <ul style="list-style-type: none"> <li>— at 200/208 V rated value</li> <li>— at 220/230 V rated value</li> <li>— at 460/480 V rated value</li> <li>— at 575/600 V rated value</li> </ul> </li> </ul>  | 0.13 hp<br>0.33 hp<br><br>0.8 hp<br>0.75 hp<br>2 hp<br>3 hp  |
| <b>contact rating of auxiliary contacts according to UL</b>  | C300 / R300  |
| <b>Short-circuit protection</b>  |  |
| <b>product function short circuit protection</b>   | Yes  |
| <b>design of the short-circuit trip</b>  | magnetic   |
| <b>design of the fuse link</b>   |  |
| <ul style="list-style-type: none"> <li>• for short-circuit protection of the auxiliary switch required</li> </ul>  | Fuse gL/gG: 10 A, miniature circuit breaker C 6 A (short-circuit current $I_k < 400$ A)  |
| <b>design of the fuse link for IT network for short-circuit protection of the main circuit</b>   |  |
| <ul style="list-style-type: none"> <li>• at 400 V</li> <li>• at 500 V</li> <li>• at 690 V</li> </ul>   | gL/gG 32 A<br>gL/gG 32 A<br>gL/gG 25 A   |
| <b>Installation/ mounting/ dimensions</b>  |  |
| <b>mounting position</b>   | any  |
| <b>fastening method</b>  | screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715   |
| <b>height</b>  | 97 mm  |
| <b>width</b>   | 45 mm  |
| <b>depth</b>   | 97 mm  |
| <b>required spacing</b>  |  |
| <ul style="list-style-type: none"> <li>• with side-by-side mounting at the side</li> </ul>   | 0 mm   |
| <ul style="list-style-type: none"> <li>• for grounded parts at 400 V <ul style="list-style-type: none"> <li>— downwards</li> <li>— upwards</li> <li>— at the side</li> </ul> </li> <li>• for live parts at 400 V <ul style="list-style-type: none"> <li>— downwards</li> <li>— upwards</li> <li>— at the side</li> </ul> </li> <li>• for grounded parts at 500 V <ul style="list-style-type: none"> <li>— downwards</li> <li>— upwards</li> <li>— at the side</li> </ul> </li> <li>• for live parts at 500 V <ul style="list-style-type: none"> <li>— downwards</li> <li>— upwards</li> <li>— at the side</li> </ul> </li> <li>• for grounded parts at 690 V <ul style="list-style-type: none"> <li>— downwards</li> <li>— upwards</li> <li>— backwards</li> <li>— at the side</li> <li>— forwards</li> </ul> </li> <li>• for live parts at 690 V <ul style="list-style-type: none"> <li>— downwards</li> <li>— upwards</li> <li>— backwards</li> <li>— at the side</li> <li>— forwards</li> </ul> </li> </ul> | 30 mm<br>30 mm<br>9 mm<br><br>30 mm<br>30 mm<br>9 mm<br><br>30 mm<br>30 mm<br>9 mm<br><br>50 mm<br>50 mm<br>0 mm<br>30 mm<br>0 mm<br><br>50 mm<br>50 mm<br>0 mm<br>30 mm<br>0 mm |
| <b>Connections/ Terminals</b>  |  |
| <b>type of electrical connection</b>   |  |
| <ul style="list-style-type: none"> <li>• for main current circuit</li> </ul>   | screw-type terminals   |

|  |  |
|--|--|
| <ul style="list-style-type: none"> <li>for auxiliary and control circuit</li> </ul>  | screw-type terminals   |
| <b>arrangement of electrical connectors for main current circuit</b>   | Top and bottom   |
| <b>type of connectable conductor cross-sections</b> <ul style="list-style-type: none"> <li>for main contacts <ul style="list-style-type: none"> <li>— solid or stranded</li> <li>— finely stranded with core end processing</li> </ul> </li> <li>for AWG cables for main contacts</li> </ul>           | 2x (0,75 ... 2,5 mm <sup>2</sup> ), 2x 4 mm <sup>2</sup><br>2x (0.5 ... 1.5 mm <sup>2</sup> ), 2x (0.75 ... 2.5 mm <sup>2</sup> )<br>2x (18 ... 14), 2x 12                       |
| <b>type of connectable conductor cross-sections</b> <ul style="list-style-type: none"> <li>for auxiliary contacts <ul style="list-style-type: none"> <li>— solid or stranded</li> <li>— finely stranded with core end processing</li> </ul> </li> <li>for AWG cables for auxiliary contacts</li> </ul> | 2x (0.5 ... 1.5 mm <sup>2</sup> ), 2x (0.75 ... 2.5 mm <sup>2</sup> )<br>2x (0.5 ... 1.5 mm <sup>2</sup> ), 2x (0.75 ... 2.5 mm <sup>2</sup> )<br>2x (20 ... 16), 2x (18 ... 14) |
| <b>tightening torque</b> <ul style="list-style-type: none"> <li>for main contacts with screw-type terminals</li> <li>for auxiliary contacts with screw-type terminals</li> </ul>   | 0.8 ... 1.2 N·m<br>0.8 ... 1.2 N·m   |
| <b>design of screwdriver shaft</b>   | Diameter 5 to 6 mm   |
| <b>size of the screwdriver tip</b>   | Pozidriv size 2  |
| <b>design of the thread of the connection screw</b> <ul style="list-style-type: none"> <li>for main contacts</li> <li>of the auxiliary and control contacts</li> </ul>   | M3<br>M3   |

#### Safety related data

|   |              |
|---|--------------|
| product function suitable for safety function   | Yes          |
| <b>suitability for use</b> <ul style="list-style-type: none"> <li>safety-related switching on</li> <li>safety-related switching OFF</li> </ul>  | No<br>Yes    |
| <b>service life maximum</b>   | 10 a         |
| <b>test wear-related service life necessary</b>   | Yes          |
| <b>proportion of dangerous failures</b> <ul style="list-style-type: none"> <li>with low demand rate according to SN 31920</li> <li>with high demand rate according to SN 31920</li> </ul> | 40 %<br>50 % |
| <b>B10 value with high demand rate according to SN 31920</b>  | 5 000        |
| <b>failure rate [FIT] with low demand rate according to SN 31920</b>  | 50 FIT       |

#### ISO 13849

|  |     |
|--|-----|
| <b>device type according to ISO 13849-1</b>                | 3   |
| <b>overdimensioning according to ISO 13849-2 necessary</b> | Yes |

#### IEC 61508

|  |        |
|--|--------|
| <b>safety device type according to IEC 61508-2</b>   | Type A |
| <b>T1 value</b> <ul style="list-style-type: none"> <li>for proof test interval or service life according to IEC 61508</li> </ul> | 10 a   |

#### Electrical Safety

|  |  |
|--|--|
| <b>protection class IP on the front according to IEC 60529</b> | IP20   |
| <b>touch protection on the front according to IEC 60529</b>    | finger-safe, for vertical contact from the front |

#### Display

|                                      |        |
|--------------------------------------|--------|
| display version for switching status | Handle |
|--------------------------------------|--------|

#### Approvals Certificates

##### General Product Approval



[KC](#)



|                          |                   |                      |
|--------------------------|-------------------|----------------------|
| General Product Approval | Test Certificates | Maritime application |
|--------------------------|-------------------|----------------------|



[Type Test Certificates/Test Report](#)

[Special Test Certificate](#)



Maritime application

other



[Miscellaneous](#)



other

Railway

Environment

[Confirmation](#)



[Special Test Certificate](#)

[Confirmation](#)



Environment

[Environmental Confirmations](#)

Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information for data generation and storage

<https://support.industry.siemens.com/cs/ww/en/view/109995012>

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RV2411-1EA15>

Cax online generator

<https://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RV2411-1EA15>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RV2411-1EA15>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)


[https://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3RV2411-1EA15&lang=en](https://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RV2411-1EA15&lang=en)

Characteristic: Tripping characteristics, I<sub>t</sub>, Let-through current

<https://support.industry.siemens.com/cs/ww/en/ps/3RV2411-1EA15/char>

Further characteristics (e.g. electrical endurance, switching frequency)

<https://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RV2411-1EA15&objecttype=14&gridview=view1>

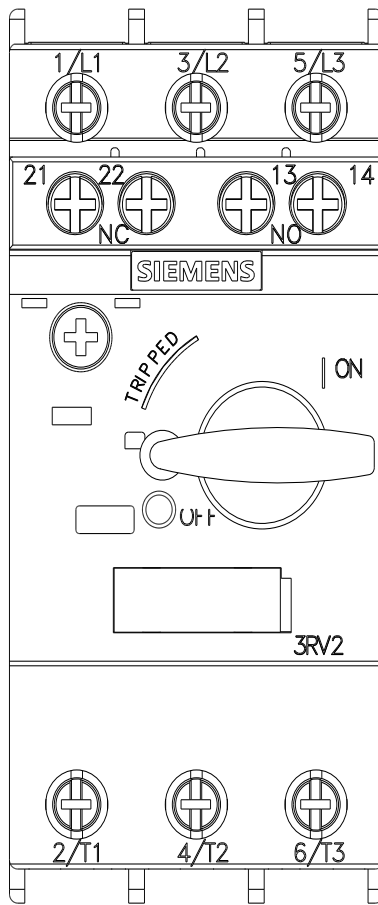



last modified:

11/11/2025 