



Communication module PROFINET for SIRIUS soft starter 3RW44 required product version 3RW44 >= \*12\*. implemented for starters 3RW44 from delivery date June 2013

product brand name	SIRIUS
product category	Communication modules
product designation	Communication module
design of the product	For 3RW44 soft starter integration in the PROFINET network, suitable for devices with firmware version E12 or higher
product type designation	3RW49
<b>General technical data</b>	
Substance Prohibance (Date)	11/13/2013
SVHC substance name	Lead - 7439-92-1 Lead monoxide (lead oxide) - 1317-36-8 2,2',6,6'-tetrabromo-4,4'-isopropylidenediphenol - 79-94-7
Weight	0.195 kg
<b>Installation/ mounting/ dimensions</b>	
height	117.3 mm
width	36.6 mm
depth	111 mm
<b>Electrical Safety</b>	
protection class IP on the front according to IEC 60529	IP20
touch protection on the front according to IEC 60529	finger-safe, for vertical contact from the front
<b>Approvals Certificates</b>	
General Product Approval	EMV



[KC](#)

Test Certificates	Maritime application	other	Environment	Industrial Communication
<a href="#">Special Test Certificate</a>			<a href="#">Confirmation</a>	<a href="#">Environmental Conformations</a>

### Further information

Information on the packaging  
<https://support.industry.siemens.com/cs/ww/en/view/109813875>  
 Information for data generation and storage  
<https://support.industry.siemens.com/cs/ww/en/view/109995012>  
 Information- and Downloadcenter (Catalogs, Brochures,...)  
<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RW4900-0NC00>

Cax online generator

<https://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RW4900-0NC00>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RW4900-0NC00>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

[https://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3RW4900-0NC00&lang=en](https://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RW4900-0NC00&lang=en)

Characteristic: Tripping characteristics, I<sup>2</sup>t, Let-through current


<https://support.industry.siemens.com/cs/ww/en/ps/3RW4900-0NC00/char>

Characteristic: Installation altitude



<https://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RW4900-0NC00&objecttype=14&gridview=view1>

Simulation Tool for Soft Starters (STS)

<https://support.industry.siemens.com/cs/ww/en/view/101494917>

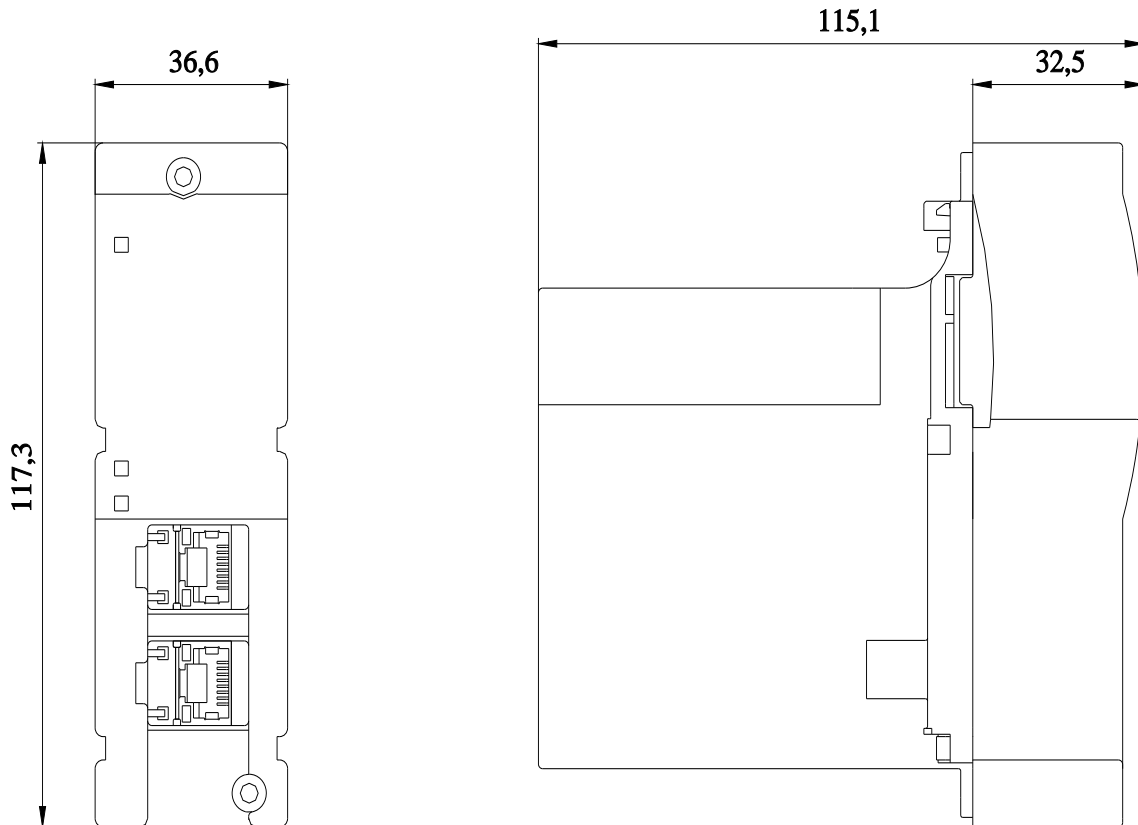

-A1

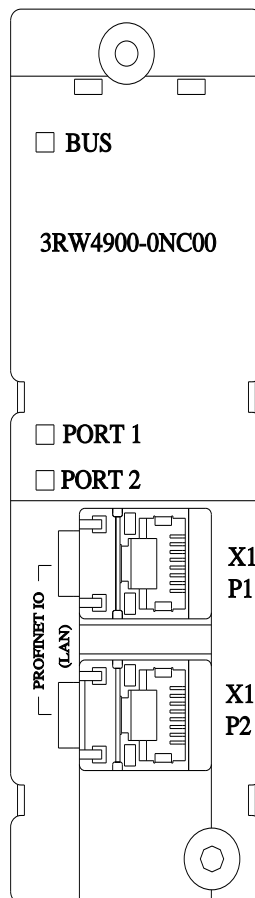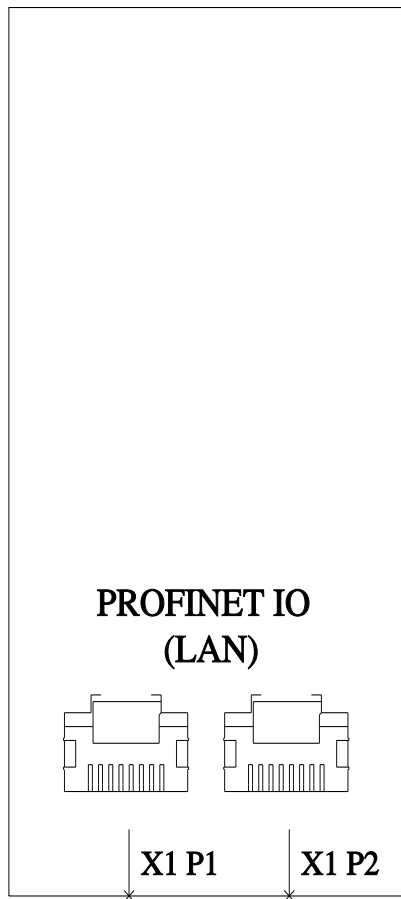

last modified:

4/2/2025 