


PCB 480 V for 3RW55, Size 4



product designation	Printed circuit board
design of the product	480 V
product type designation	3RW59
manufacturer's article number of soft starter	3RW554.-HA.4

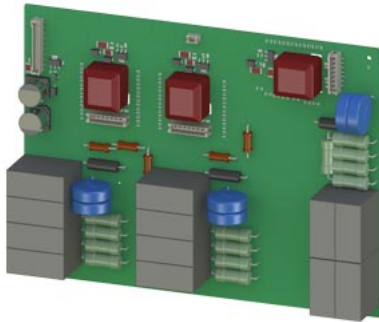


General technical data

Substance Prohibittance (Date)	02/15/2018
SVHC substance name	Lead - 7439-92-1 Lead monoxide (lead oxide) - 1317-36-8
Weight	100 g





Ambient conditions

ambient temperature during storage	-40 ... +80 °C
------------------------------------	----------------

Approvals Certificates

General Product Approval	EMV	For use in hazardous locations	Test Certificates
 EG-Konf.			Type Test Certificates/Test Report
	KC	Miscellaneous	

Maritime application

 ABS	 DNV	 LRS	 PRS		Confirmation
--	--	--	--	---	------------------------------

Environment

[Environmental Conformations](#)

Further information

Information on the packaging
<https://support.industry.siemens.com/cs/ww/en/view/109813875>
 Information for data generation and storage
<https://support.industry.siemens.com/cs/ww/en/view/109995012>
 Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RW5954-0PY04>

Cax online generator

<https://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RW5954-0PY04>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RW5954-0PY04>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

https://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RW5954-0PY04&lang=en

Characteristic: Tripping characteristics, I²t, Let-through current

<https://support.industry.siemens.com/cs/ww/en/ps/3RW5954-0PY04/char>

Characteristic: Installation altitude

<https://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RW5954-0PY04&objecttype=14&gridview=view1>

Simulation Tool for Soft Starters (STS)

<https://support.industry.siemens.com/cs/ww/en/view/101494917>

last modified:

4/2/2025 

