



SIRIUS safety relay Basic unit Advanced series 3 electronic enabling circuits 1 electronic signaling circuit  $U_s = 24\text{ V DC}$  screw terminal

|  |   |
|--|---|
| <b>product brand name</b>  | SIRIUS  |
| <b>product category</b>  | Safety relays   |
| <b>product designation</b>   | safety relays   |
| <b>design of the product</b>   | Solid-state enabling circuits   |
| <b>product type designation</b>  | 3SK1  |
| <b>product line</b>  | Advanced basic unit   |
| <b>Product Function</b>  |   |
| <b>product function parameterizable</b>  | sensor floating / sensor non-floating, monitored start-up / automatic start, 1-channel / 2-channel sensor connection, cross-circuit detection, startup testing, antivalent sensors, 2-hand switches |
| <b>product function</b>  |   |
| <ul style="list-style-type: none"> <li>• automatic start</li> <li>• light barrier monitoring</li> <li>• protective door monitoring</li> <li>• magnetically operated switch monitoring NC-NO</li> <li>• magnetically operated switch monitoring NC-NC</li> <li>• laser scanner monitoring</li> <li>• light array monitoring</li> <li>• EMERGENCY OFF function</li> <li>• monitored start-up</li> <li>• pressure-sensitive mat monitoring</li> </ul> | <ul style="list-style-type: none"> <li>Yes</li> <li>Yes</li> <li>Yes</li> <li>Yes</li> <li>Yes</li> <li>Yes</li> <li>Yes</li> <li>Yes</li> <li>Yes</li> <li>No</li> </ul>                           |
| <b>suitability for interaction press control</b>   | Yes   |
| <b>suitability for operation device connector 3ZY12</b>  | Yes   |
| <b>suitability for use</b>   |   |
| <ul style="list-style-type: none"> <li>• monitoring of floating sensors</li> <li>• monitoring of non-floating sensors</li> <li>• position switch monitoring</li> <li>• EMERGENCY-OFF circuit monitoring</li> <li>• opto-electronic protection device monitoring</li> <li>• magnetically operated switch monitoring</li> <li>• safety switch</li> <li>• safety-related circuits</li> </ul>  | <ul style="list-style-type: none"> <li>Yes</li> <li>Yes</li> <li>Yes</li> <li>Yes</li> <li>Yes</li> <li>Yes</li> <li>Yes</li> <li>Yes</li> </ul>  |
| <b>General technical data</b>  |   |
| certificate of suitability UL approval   | Yes   |
| <b>product feature cross-circuit-proof</b>   | Yes   |
| <b>power loss [W] maximum</b>  | 2 W   |
| <b>insulation voltage rated value</b>  | 50 V  |
| <b>degree of pollution</b>   | 3   |
| <b>overvoltage category</b>  | 3   |
| <b>surge voltage resistance rated value</b>  | 800 V   |
| protection class IP of the enclosure   | IP20  |


|   |   |
|---|---|
| <b>shock resistance</b>   | 10g / 11 ms   |
| <b>vibration resistance according to IEC 60068-2-6</b>  | 5 ... 500 Hz: 0.75 mm   |
| <b>operating frequency maximum</b>  | 2 000 1/h   |
| <b>reference code according to IEC 81346-2</b>  | F   |
| <b>Substance Prohibitance (Date)</b>  | 11/05/2012  |
| <b>SVHC substance name</b>  | Lead - 7439-92-1<br>Lead monoxide (lead oxide) - 1317-36-8<br>2,2',6,6'-tetrabromo-4,4'-isopropylidenediphenol - 79-94-7<br>Lead titanium zirconium oxide - 12626-81-2<br>6,6'-di-tert-butyl-2,2'-methylenedi-p-cresol - 119-47-1 |
| <b>Weight</b>   | 0.204 kg  |
| <b>Ambient conditions</b>   |   |
| installation altitude at height above sea level maximum   | 4 000 m; Derating, see Product Notification 109792701   |
| <b>ambient temperature</b>  |   |
| • during operation  | -25 ... +60 °C  |
| • during storage  | -40 ... +80 °C  |
| relative humidity during operation  | 10 ... 95 %   |
| air pressure according to SN 31205  | 900 ... 1 060 hPa   |
| <b>Electromagnetic compatibility</b>  |   |
| <b>installation environment regarding EMC</b>   | This product is suitable for Class A environments only. In household environments, this device can cause unwanted radio interference. The user is required to implement appropriate measures in this case.                        |
| <b>EMC emitted interference</b>   | IEC 60947-5-1, Class A  |
| <b>Safety related data</b>  |   |
| product function suitable for safety function   | Yes   |
| <b>safe state</b>   | Safety outputs switched off   |
| <b>test wear-related service life necessary</b>   | No  |
| <b>diagnostics test interval by internal test function maximum</b>                              | 600 s   |
| <b>stop category according to IEC 60204-1</b>   | 0   |
| <b>IEC 62061</b>  |   |
| SIL Claim Limit (subsystem) according to EN 62061   | 3   |
| <b>Safety Integrity Level (SIL)</b>   |   |
| • according to IEC 62061  | SIL 3   |
| • at single-channel evaluation according to IEC 62061   | 1   |
| • at 2-channel evaluation according to IEC 62061  | 3   |
| PFHD with high demand rate according to IEC 62061   | 1.3E-9 1/h  |
| <b>ISO 13849</b>  |   |
| category according to EN ISO 13849-1  | 4   |
| <b>performance level (PL)</b>   |   |
| • according to ISO 13849-1  | PL e  |
| • at single-channel evaluation according to ISO 13849-1   | c   |
| • at 2-channel evaluation according to ISO 13849-1  | e   |
| <b>category</b>   |   |
| • according to ISO 13849-1  | 4   |
| • at 2-channel evaluation according to ISO 13849-1  | 4   |
| <b>overdimensioning according to ISO 13849-2 necessary</b>                                      | No  |
| <b>IEC 61508</b>  |   |
| <b>Safety Integrity Level (SIL)</b>   |   |
| • according to IEC 61508  | 3   |
| • at single-channel evaluation according to IEC 61508   | 1   |
| • at 2-channel evaluation according to IEC 61508  | 3   |
| <b>safety device type according to IEC 61508-2</b>  | Type B  |
| <b>PFHD with high demand rate according to IEC 61508</b>  | 1.3E-9 1/h  |
| <b>Average probability of failure on demand (PFDavg) with low demand rate acc. to IEC 61508</b> | 7E-6 1/y  |
| PFDavg with low demand rate according to IEC 61508  | 7E-6  |
| <b>Safe failure fraction (SFF)</b>  | 99 %  |
| <b>hardware fault tolerance</b>   |   |
| • according to IEC 61508  | 1   |
| • at single-channel evaluation according to IEC 61508   | 0   |
| • at 2-channel evaluation according to IEC 61508  | 1   |
| <b>T1 value</b>   |   |
| • of service life according to IEC 61508  | 20 a  |

|  |                            |
|--|----------------------------|
| <ul style="list-style-type: none"> <li>for proof test interval or service life according to IEC 61508</li> </ul>   | 20 a                       |
| <b>Electrical Safety</b>   |                            |
| <b>touch protection against electrical shock</b>   | finger-safe                |
| <b>Short-circuit protection</b>  |                            |
| <b>design of the fuse link</b> <ul style="list-style-type: none"> <li>for short-circuit protection of the NO contacts of the relay outputs required</li> </ul>   | not required               |
| <b>Inputs</b>  |                            |
| <b>design of input</b> <ul style="list-style-type: none"> <li>cascading input/functional switching</li> <li>feedback input</li> <li>start input</li> </ul>   | Yes<br>Yes<br>Yes          |
| pulse duration of the sensor input minimum   | 60 ms                      |
| number of sensor inputs 1-channel or 2-channel   | 1                          |
| <b>Outputs</b>   |                            |
| <b>number of outputs as contact-affected switching element</b> <ul style="list-style-type: none"> <li>as NO contact <ul style="list-style-type: none"> <li>safety-related instantaneous contact</li> <li>safety-related delayed switching</li> </ul> </li> </ul>   | 0<br>0                     |
| <b>number of outputs as contact-less semiconductor switching element</b> <ul style="list-style-type: none"> <li>for signaling function <ul style="list-style-type: none"> <li>instantaneous contact</li> </ul> </li> <li>safety-related <ul style="list-style-type: none"> <li>delayed switching</li> <li>instantaneous contact</li> </ul> </li> </ul> | 1<br>0<br>3                |
| switching capacity current of semiconductor outputs at DC-13 at 24 V   | 2 A                        |
| <b>Times</b>   |                            |
| <b>make time with automatic start</b> <ul style="list-style-type: none"> <li>at DC maximum</li> </ul>  | 85 ms                      |
| <b>make time with automatic start after power failure</b> <ul style="list-style-type: none"> <li>typical</li> <li>maximum</li> </ul>   | 6 500 ms<br>6 500 ms       |
| <b>make time with monitored start</b> <ul style="list-style-type: none"> <li>maximum</li> </ul>  | 85 ms                      |
| <b>backslide delay time after opening of the safety circuits typical</b>   | 40 ms                      |
| <b>recovery time after opening of the safety circuits typical</b>  | 30 ms                      |
| <b>recovery time after power failure typical</b>   | 6.5 s                      |
| <b>pulse duration</b> <ul style="list-style-type: none"> <li>of the ON pushbutton input minimum</li> </ul>   | 0.15 s                     |
| <b>Control circuit/ Control</b>  |                            |
| <b>type of voltage of the control supply voltage</b>   | DC                         |
| <b>control supply voltage at DC rated value</b>  | 24 V                       |
| <b>operating range factor control supply voltage rated value of magnet coil at DC</b> <ul style="list-style-type: none"> <li>initial value</li> <li>full-scale value</li> </ul>  | 0.8<br>1.2                 |
| <b>Installation/ mounting/ dimensions</b>  |                            |
| <b>mounting position</b>   | any                        |
| <b>fastening method</b>  | screw and snap-on mounting |
| <b>height</b>  | 100 mm                     |
| <b>width</b>   | 22.5 mm                    |
| <b>depth</b>   | 121.6 mm                   |
| <b>required spacing</b> <ul style="list-style-type: none"> <li>for grounded parts at the side</li> </ul>   | 5 mm                       |
| <b>Connections/ Terminals</b>  |                            |
| <b>type of electrical connection</b>   | screw terminal             |
| <b>wire length</b> <ul style="list-style-type: none"> <li>with Cu 1.5 mm<sup>2</sup> and 150 nF/km per sensor circuit</li> </ul>   | 4 000 m                    |

|  |  |
|--|--|
| maximum  |  |
| <b>type of connectable conductor cross-sections</b>  |  |
| <ul style="list-style-type: none"> <li>• solid</li> </ul>                                    | 1x (0.5 ... 2.5 mm <sup>2</sup> ), 2x (1.0 ... 1.5 mm <sup>2</sup> ) |
| <ul style="list-style-type: none"> <li>• finely stranded with core end processing</li> </ul> | 1x (0.5 ... 2.5 mm <sup>2</sup> ), 2x (0.5 ... 1.0 mm <sup>2</sup> ) |
| <ul style="list-style-type: none"> <li>• for AWG cables solid</li> </ul>                     | 1x (20 ... 14), 2x (18 ... 16)                                       |
| <ul style="list-style-type: none"> <li>• for AWG cables stranded</li> </ul>                  | 1x (20 ... 16), 2x (20 ... 16)                                       |
| <b>type of electrical connection plug-in socket</b>  | No   |

**Approvals Certificates**



|   |     |
|---|-----|
| <b>General Product Approval</b>   | EMV |
|       |     |




|  |  |   |
|--|--|---|
| <b>Functional Safety</b>                     | <b>Test Certificates</b>                           | <b>Maritime application</b>   |
| <a href="#">Type Examination Certificate</a> | <a href="#">Type Test Certificates/Test Report</a> |     |

|  |                              |   |
|--|------------------------------|---|
| <b>other</b>   | <b>Railway</b>               | <b>Environment</b>                          |
|  | <a href="#">Confirmation</a> | <a href="#">Confirmation</a>                |
|  |                              | <a href="#">Environmental Confirmations</a> |

**Further information**

**Information on the packaging**  
<https://support.industry.siemens.com/cs/ww/en/view/109813875>  
**Information for data generation and storage**  
<https://support.industry.siemens.com/cs/ww/en/view/109995012>  
**Information- and Downloadcenter (Catalogs, Brochures,...)**  
<https://www.siemens.com/ic10>  
**Industry Mall (Online ordering system)**  
<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3SK1122-1AB40>  
**Cax online generator**  
<https://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3SK1122-1AB40>  
**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**  
<https://support.industry.siemens.com/cs/ww/en/ps/3SK1122-1AB40>  
**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)**  
[https://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3SK1122-1AB40&lang=en](https://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3SK1122-1AB40&lang=en)

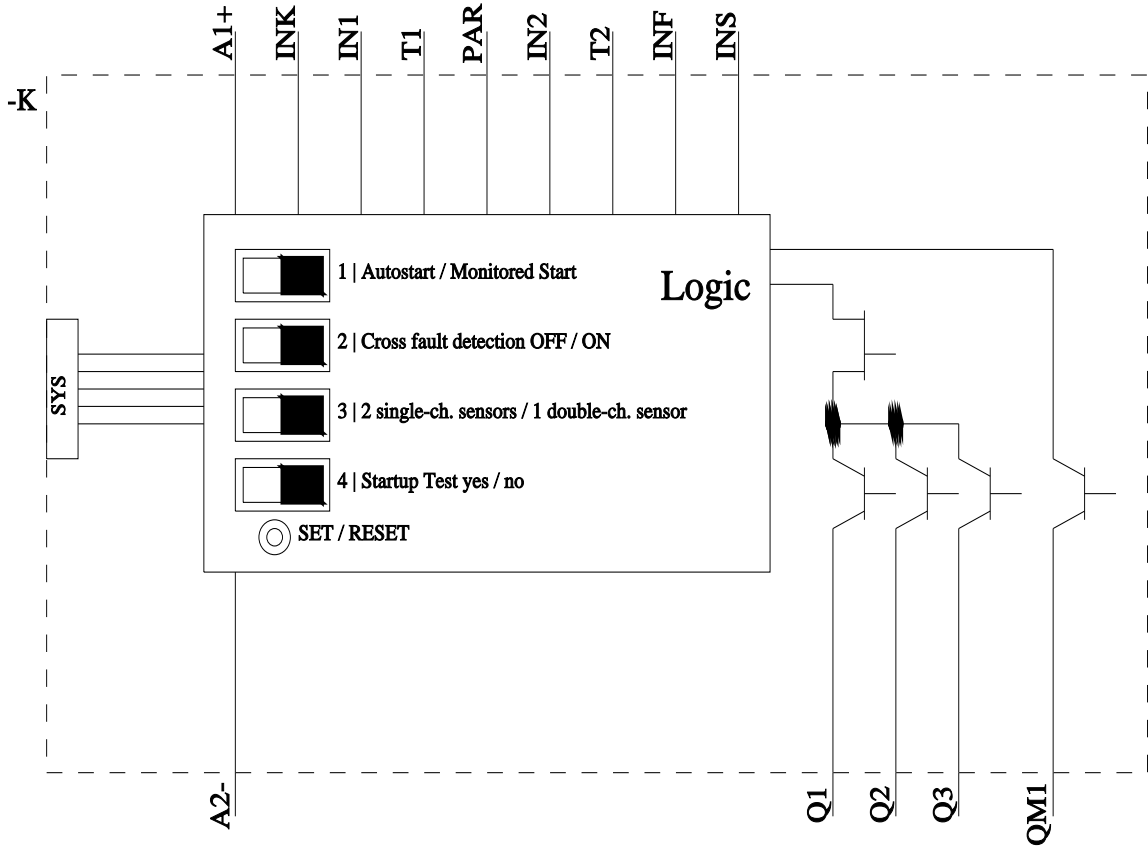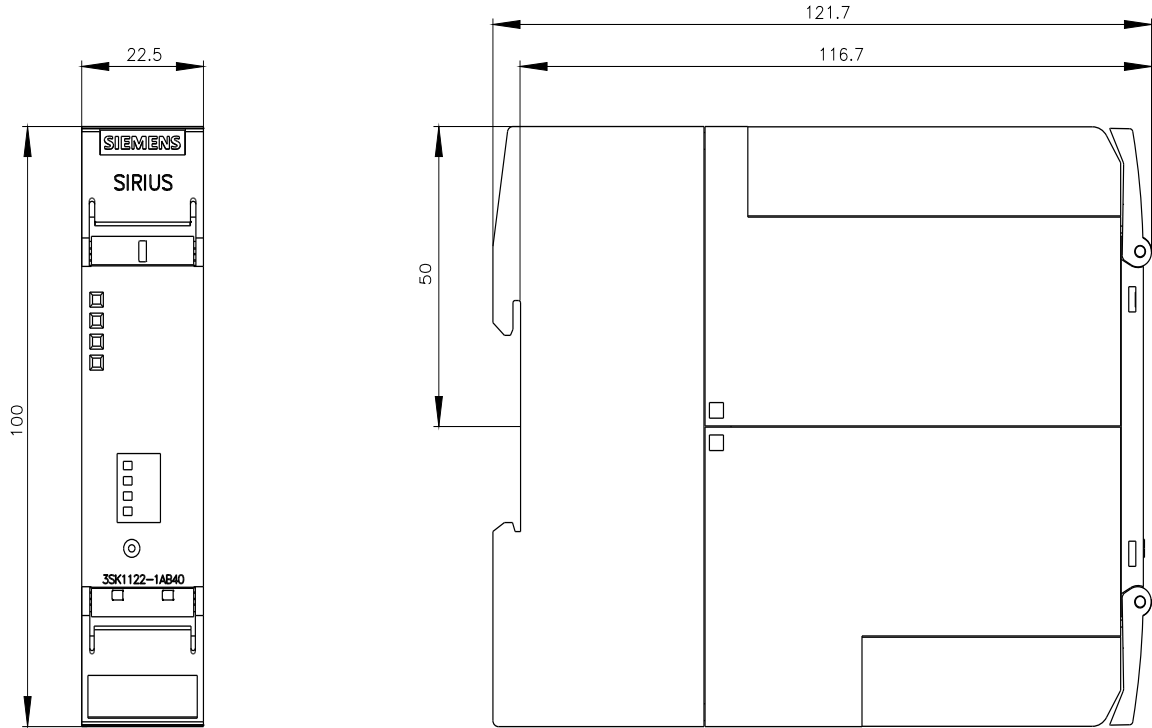

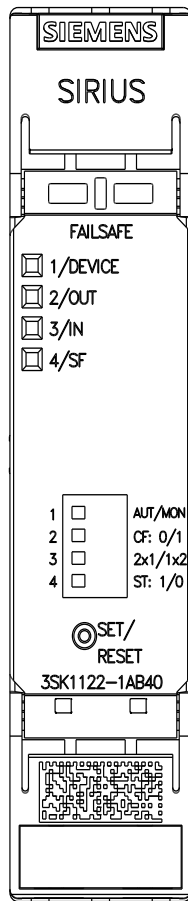

last modified:

10/7/2025