



Locking device made of metal, for selector switch, 22 mm, short or long handle, in position left

product brand name	SIRIUS ACT	
product designation	Locking device	
design of the product	for selectors (short/long actuator), in the left position	
product type designation	3SU1	
<b>General technical data</b>		
protection class IP	IP66, IP67, IP69(IP69K)	
Substance Prohibittance (Date)	10/01/2014	
Weight	0.057 kg	
<b>Ambient conditions</b>		
ambient temperature	-40 ... +80 °C	
• during storage		
<b>Environmental footprint</b>		
Environmental Product Declaration(EPD)	Yes	
global warming potential [CO2 eq] total	0.593 kg	
global warming potential [CO2 eq] during manufacturing	0.625 kg	
global warming potential [CO2 eq] during operation	0.235 kg	
global warming potential [CO2 eq] after end of life	-0.267 kg	
<b>Installation/ mounting/ dimensions</b>		
height	47.5 mm	
width	47 mm	
depth	21.1 mm	
<b>Accessories</b>		
material of accessory	Metal	
color of accessory	Silver	
<b>Approvals Certificates</b>		
General Product Approval	Test Certificates	Maritime application



[Type Test Certificates/Test Report](#)



Maritime application

other

Environment



[Confirmation](#)



## Further information

## Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

## Information for data generation and storage

<https://support.industry.siemens.com/cs/ww/en/view/109995012>

## Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

## Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3SU1950-0DQ80-0AA0>

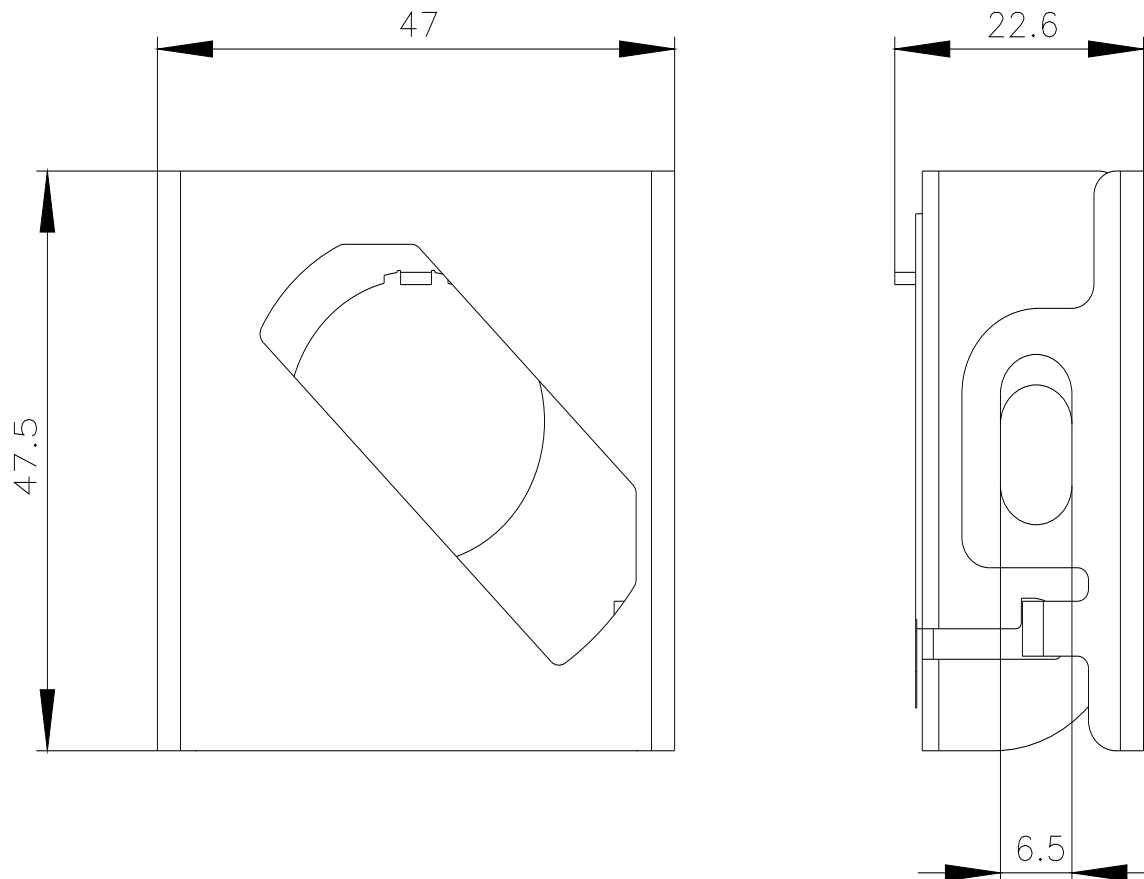
## Cax online generator

<https://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3SU1950-0DQ80-0AA0>

## Service&amp;Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3SU1950-0DQ80-0AA0>

## Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

[https://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3SU1950-0DQ80-0AA0&lang=en](https://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3SU1950-0DQ80-0AA0&lang=en)

last modified:

4/2/2025 