



Neutral conductor, leading switching for Front mounting, for 100 A and 125 A, accessory for main and emergency switching-off switch 3LD2

Model	
product brand name	SETRON
product designation	Neutral conductor
design of the product	accessories for 3LD2 main and EMERGENCY-STOP switches
Accessories	
accessories	leading switching for front mounting, for 100 A and 125 A
AWG number as coded connectable conductor cross section	
• minimum	12
• maximum	1
type of connectable conductor cross-sections for main contacts	
• finely stranded with core end processing	1x (4...50 mm <sup>2</sup> )
• solid or stranded	1x (4...35 mm <sup>2</sup> )
Mechanical Design	
Net Weight	97 g
Approvals Certificates	
General Product Approval	



other

Environment



[Confirmation](#)

[Environmental Con-  
firmations](#)

[Environmental Con-  
firmations](#)

### Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information for data generation and storage

<https://support.industry.siemens.com/cs/ww/en/view/109995012>

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>


Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3LD9280-0B>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3LD9280-0B>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

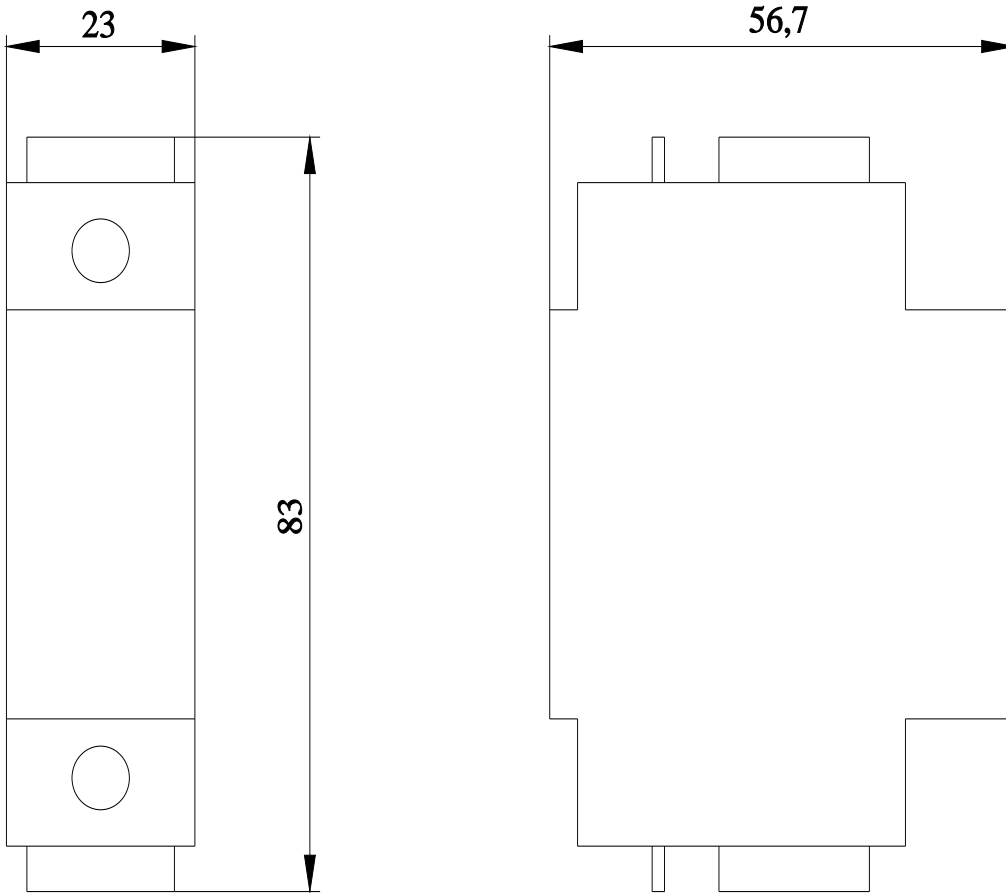

last modified:

4/12/2025 

