



SENTRON 3KC ATC6500; LCD; 180x240 mm; transfer control device for control of MCCB, ACB, for load transfer between main and standby power supply; additional control of a coupling switch possible; control panel instrument; Un: 100...240 V AC 50/60 Hz 110...250 V DC; Un: 12...48 V DC, nominal voltage Ue: 100...600 V AC 50/60 Hz; screw terminal connection; integrated RS 485 interface, expandable with up to 3 additional modules

Model	
product brand name	SENTRON
product designation	Accessories for transfer switching equipment
design of the product	3KC ATC6500
operating temperature	
• minimum	-30 °C
• maximum	70 °C
switchover time of the control device	50 ms
overvoltage category	3
power frequency withstand voltage at auxiliary power supply at AC	3 000 V
insulation voltage (Ui) at auxiliary power supply at AC rated value	250 V
impulse withstand voltage (Uimp) of the auxiliary power supply at AC rated value	7 300 V
interference immunity duration against voltage dip/sag at AC at 220 V	
• without expansion modules maximum	200 ms
• with 1 expansion module maximum	170 ms
• with 2 expansion modules maximum	150 ms
• with 3 expansion modules maximum	100 ms
supply voltage of the auxiliary power supply	
• at AC initial rated value	100 V
• at AC final rated value	240 V
• at AC minimum	90 V
• at AC maximum	264 V
• at DC initial rated value	110 V
• at DC final rated value	250 V
• at DC minimum	93.5 V
• at DC maximum	300 V
supply voltage at DC power supply	
• initial rated value	12 V
• final rated value	48 V
• minimum	7.5 V
• maximum	57.6 V
operating period without auxiliary power supply maximum	14 d
protection class IP	
• on the front	IP40
• rear side	IP20
apparent power consumption at auxiliary power supply at AC at 240 V maximum	12.5 VA
power loss [W] at auxiliary power supply	

<ul style="list-style-type: none"> • at AC at 240 V • at DC at 250 V maximum 	5.5 W 4.7 W
power loss [W] at DC power supply	
<ul style="list-style-type: none"> • at 12 V maximum • at 24 V maximum • at 48 V maximum 	4.8 W 4.5 W 4.2 W
operating frequency rated value	
<ul style="list-style-type: none"> • minimum • maximum 	45 Hz 66 Hz
number of CO contacts for auxiliary contacts	3
number of NC contacts for auxiliary contacts	0
number of NO contacts for auxiliary contacts	4
product component of the hardware real time clock backup battery	Yes
product feature of enclosure material	Polycarbonate
number of slots	3
input current at digital input with signal <0> maximum	8 mA
number of digital inputs	8
<ul style="list-style-type: none"> • design of the switching input 	Negative
output voltage at the relay outputs at AC maximum rated value	250 V
number of outputs as contact-affected switching element	7
output current at the relay outputs	
<ul style="list-style-type: none"> • at AC-1 at 250 V rated value • at AC-15 at 250 V rated value • at DC-1 at 30 V rated value 	8 A 1.5 A 8 A
type of contact rating according to NEMA	B300
switching capacity current at the relay outputs at DC at 30 V according to UL 508	1 A
mechanical service life (operating cycles) of the relay outputs	10 000 000
electrical endurance (operating cycles) of the relay outputs	100 000
input delay time	0.05 s
insulation voltage (Ui) of the relay outputs rated value	250 V
signal voltage	
<ul style="list-style-type: none"> • for signal <0> at DC rated value • for signal <1> at DC rated value 	2 V 3.4 V
impulse withstand voltage (Uimp) of the relay outputs rated value	7 300 V
number of monitored phases	3
connectable conductor cross-section	
<ul style="list-style-type: none"> • minimum • maximum 	0.2 mm ² 2.5 mm ²
connectable conductor cross-section according to UL 508	
<ul style="list-style-type: none"> • minimum • maximum 	0.75 mm ² 2.5 mm ²
AWG number as coded connectable conductor cross section	
<ul style="list-style-type: none"> • minimum • maximum 	24 12
AWG number as coded connectable conductor cross section according to UL 508	
<ul style="list-style-type: none"> • minimum • maximum 	18 12
tightening torque [lbf-in] with screw-type terminals maximum	5 lbf-in
tightening torque with screw-type terminals maximum	0.56 N·m
type of electrical connection	Removable/plug-in
Mechanical Design	
height	180 mm
width	240 mm
depth	32.6 mm
installation depth with expansion module maximum	56.4 mm
Net Weight	997 g

Environmental conditions

ambient temperature during storage

- minimum -30 °C
- maximum 80 °C

Certificates

reference code according to IEC 81346-2 K

Approvals Certificates

General Product Approval

EMV



[Miscellaneous](#)



other

Environment



[Confirmation](#)

[Environmental Confirmations](#)

Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information for data generation and storage

<https://support.industry.siemens.com/cs/ww/en/view/109995012>

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3KC9000-8TL50>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3KC9000-8TL50>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)



http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3KC9000-8TL50

CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>

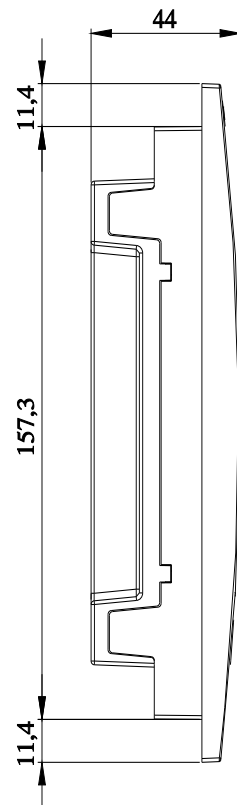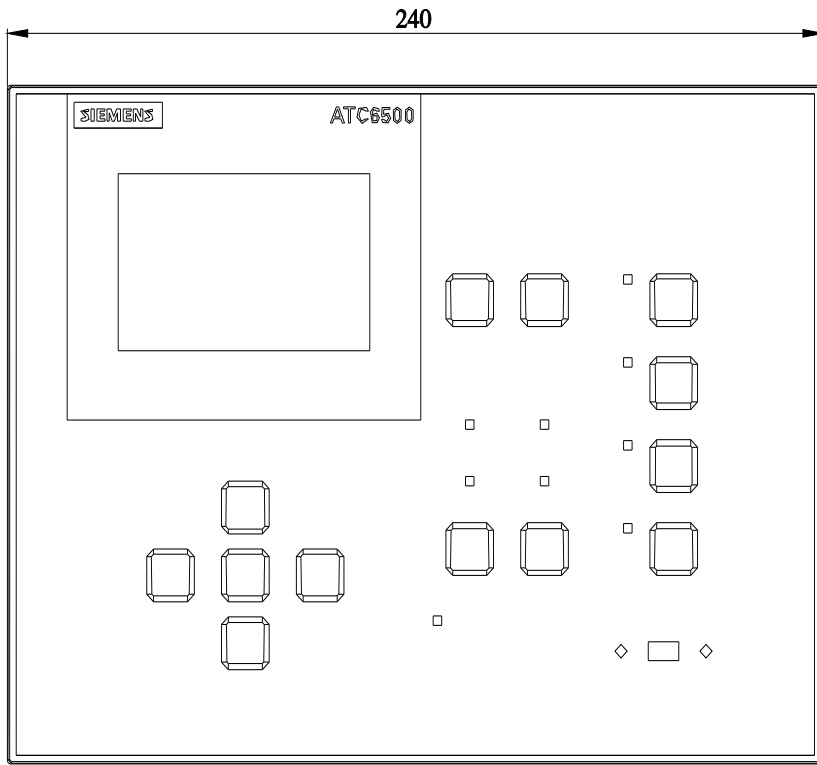

last modified:

4/3/2025 

