



SENTRON, Switch disconnecter 3LD, emergency switching-off switch, 3- pole, Iu: 100 A, operating power / at AC-23 A 400 V: 37 kW, front-mounted, rotary operating mechanism, Red / yellow, 4-hole mounting of the handle

| Model | |
|---|--|
| product brand name | SENTRON |
| product designation | Switch disconnecter |
| design of the product | EMERGENCY-STOP switch |
| display version for switch position indicator manual operation | 1 ON - 0 OFF |
| type of switch | front mounted |
| design of the actuating element | Short rotary knob |
| color of the actuating element | red |
| design of handle | rotary operating mechanism, red/yellow |
| type of the driving mechanism motor drive | No |
| General technical data | |
| number of poles | 3 |
| size of switch disconnecter | 4 |
| mechanical service life (operating cycles) typical | 100 000 |
| electrical endurance (operating cycles) | |
| • at AC-23 A at 690 V | 6 000 |
| operating frequency maximum | 50 1/h |
| degree of pollution | 3 |
| Voltage | |
| insulation voltage rated value | 690 V |
| surge voltage resistance rated value | 6 kV |
| operating voltage | |
| • at AC rated value | 690 V |
| operating frequency rated value | |
| • minimum | 50 Hz |
| • maximum | 60 Hz |
| Protection class | |
| protection class IP | IP65 |
| degree of protection NEMA rating | 1, 3R, 4X, 12 |
| protection class IP on the front | IP65 |
| Dissipation | |
| power loss [W] for rated value of the current at AC in hot operating state per pole | 7.5 W |
| Main circuit | |
| operational current | |
| • at AC-21 at 690 V rated value | 100 A |
| • at AC-21 A at 240 V rated value | 100 A |
| • at AC-21 A at 400 V rated value | 100 A |
| • at AC-21 A at 440 V rated value | 100 A |

| | |
|---|-----------------------|
| <ul style="list-style-type: none"> at AC-23 A at 400 V rated value | 70 A |
| operating power | |
| <ul style="list-style-type: none"> at AC-23 A at 240 V rated value | 18.5 kW |
| <ul style="list-style-type: none"> at AC-23 A at 400 V rated value | 37 kW |
| <ul style="list-style-type: none"> at AC-23 A at 440 V rated value | 37 kW |
| <ul style="list-style-type: none"> at AC-23 A at 690 V rated value | 30 kW |
| <ul style="list-style-type: none"> at AC-3 at 240 V rated value | 18.5 kW |
| <ul style="list-style-type: none"> at AC-3 at 400 V rated value | 30 kW |
| <ul style="list-style-type: none"> at AC-3 at 690 V rated value | 22 kW |
| Auxiliary circuit | |
| number of CO contacts for auxiliary contacts | 0 |
| number of NC contacts for auxiliary contacts | 0 |
| number of NO contacts for auxiliary contacts | 0 |
| operating voltage of auxiliary contacts at AC maximum | 500 V |
| continuous current of the auxiliary contact rated value | 10 A |
| insulation voltage of the auxiliary switch rated value | 500 V |
| Suitability | |
| suitability for use main switch | Yes |
| suitability for use switch disconnecter | Yes |
| suitability for use EMERGENCY OFF switch | Yes |
| suitability for use safety switch | Yes |
| suitability for use maintenance/repair switch | Yes |
| Product details | |
| product feature can be locked into OFF position | Yes |
| Accessories | |
| product extension optional | |
| <ul style="list-style-type: none"> motor drive | No |
| <ul style="list-style-type: none"> voltage trigger | No |
| number of connectable NC contacts for auxiliary contacts attachable maximum | 3 |
| number of connectable NO contacts for auxiliary contacts attachable maximum | 3 |
| number of connectable CO contacts for auxiliary contacts attachable maximum | 0 |
| number of bracket locks maximum | 3 |
| hasp thickness of the bracket locks | 4 ... 8 mm |
| Short circuit | |
| conditional short-circuit current with line-side fuse protection | |
| <ul style="list-style-type: none"> at 690 V by gG fuse rated value | 50 kA |
| let-through current with closed switch | |
| <ul style="list-style-type: none"> at 240 V for combination switch + gG fuse maximum | 10 kA |
| <ul style="list-style-type: none"> at 440 V for combination switch + gG fuse maximum | 10 kA |
| <ul style="list-style-type: none"> at 690 V for combination switch + gG fuse maximum permissible | 10 kA |
| I²t value with closed switch | |
| <ul style="list-style-type: none"> at 240 V for combination switch + gG fuse maximum | 64 kA ² .s |
| <ul style="list-style-type: none"> at 440 V for combination switch + gG fuse maximum | 64 kA ² .s |
| <ul style="list-style-type: none"> at 690 V for combination switch + gG fuse maximum | 64 kA ² .s |
| design of the fuse link | |
| <ul style="list-style-type: none"> for short-circuit protection of the main circuit required | fuse gL/gG: 100 A |
| <ul style="list-style-type: none"> for short-circuit protection of the auxiliary switch required | fuse gL/gG: 10 A |
| operational current of upstream fuse rated value | 100 A |
| according UL | |
| operational current at AC according to UL 508/UL 60947-4-1 rated value | 100 A |
| operating voltage at AC at 50/60 Hz according to UL 508/UL 60947-4-1 rated value | 600 V |
| active power [hp] at AC at 480 V according to UL 508/UL 60947-4-1 rated value | 60 |
| active power [hp] at AC at 600 V according to UL 508/UL 60947-4-1 rated value | 75 |
| short-time withstand current (SCCR) at 600 V according to | 10 kA |

| | |
|---|-------|
| UL 508/UL 60947-4-1 | |
| continuous current of upstream fuse according to UL rated value | 200 A |
| type of fuse according to UL | RK5 |

Connections

| | |
|---|--|
| AWG number as coded connectable conductor cross section solid maximum | |
| • | 1 |
| • | 12 |
| type of connectable conductor cross-sections for copper conductor | |
| • solid | 1x (4...50mm ²) |
| • finely stranded with core end processing | 1x (4...35mm ²) |
| • stranded | 1x (4...50mm ²) |
| type of connectable conductor cross-sections for auxiliary contacts | |
| • solid | lateral auxiliary switch 2x (0,75 ... 2,5mm ²), 1x 4mm ² ; front auxiliary switch 1x (0,75 ... 2,5mm ²) |
| • finely stranded with core end processing | lateral auxiliary switch 2x (0,75 ... 1,5mm ²), 1x 2,5mm ² ; front auxiliary switch 1x 2,5mm ² |
| • stranded | lateral auxiliary switch 2x (0,75 ... 2,5mm ²), 1x 4mm ² ; front auxiliary switch 1x (0,75 ... 2,5mm ²) |
| type of electrical connection | |
| • for main current circuit | box terminal |
| • for auxiliary contacts | connection terminals |

Mechanical Design

| | |
|--|-------------------------------------|
| height | 107 mm |
| width | 90 mm |
| depth | 112.5 mm |
| type of device | fixed mounting |
| fastening method | Built-in unit fixed-mounted version |
| fastening method | |
| • 4-hole front mounting | Yes |
| • front mounting with central attachment | No |
| • rail mounting | No |

| | |
|------------|-------|
| Net Weight | 491 g |
|------------|-------|

Environmental conditions

| | |
|--------------------------------------|--------|
| ambient temperature during operation | |
| • minimum | -25 °C |
| • maximum | 55 °C |
| ambient temperature during storage | |
| • minimum | -25 °C |
| • maximum | 55 °C |

Approvals Certificates

General Product Approval



Miscellaneous



| | | |
|----------------------|-------|-------------|
| Maritime application | other | Environment |
|----------------------|-------|-------------|



[Confirmation](#)

[Environmental Con-
firmations](#)

[Environmental Con-
firmations](#)

Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information for data generation and storage

<https://support.industry.siemens.com/cs/ww/en/view/109995012>

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3LD2704-0TK53>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3LD2704-0TK53>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)



https://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3LD2704-0TK53


CAx-Online-Generator

<https://www.siemens.com/cax>

Tender specifications

<https://www.siemens.com/specifications>

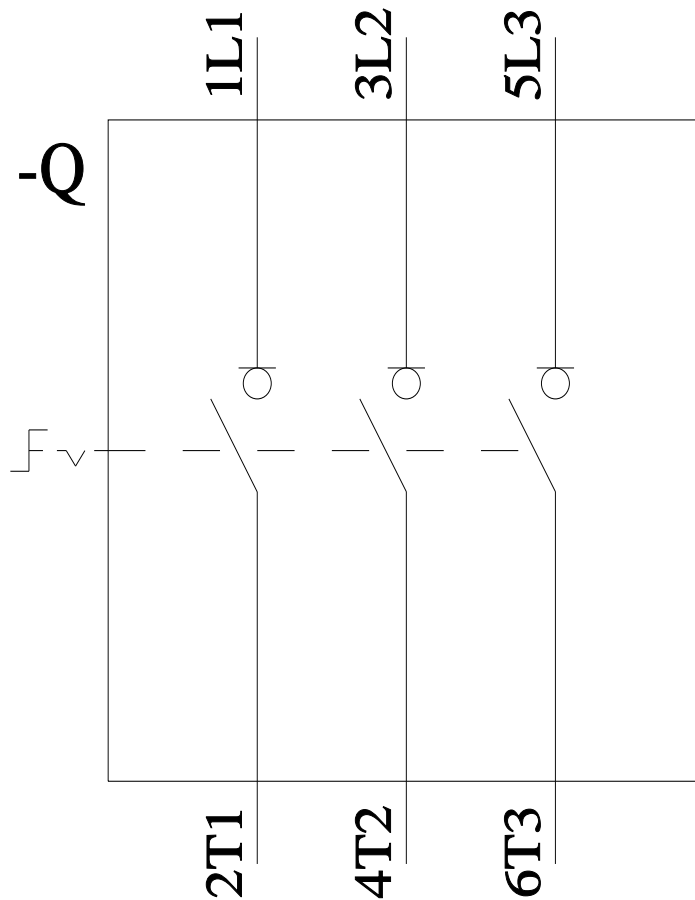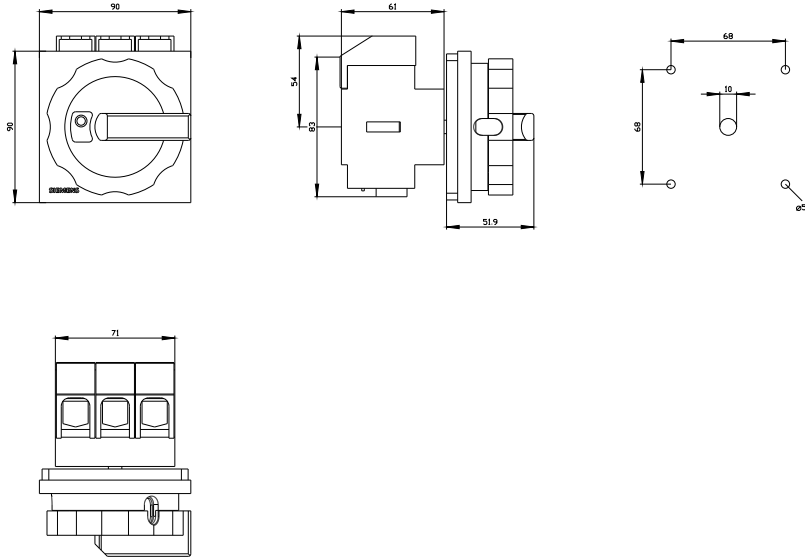

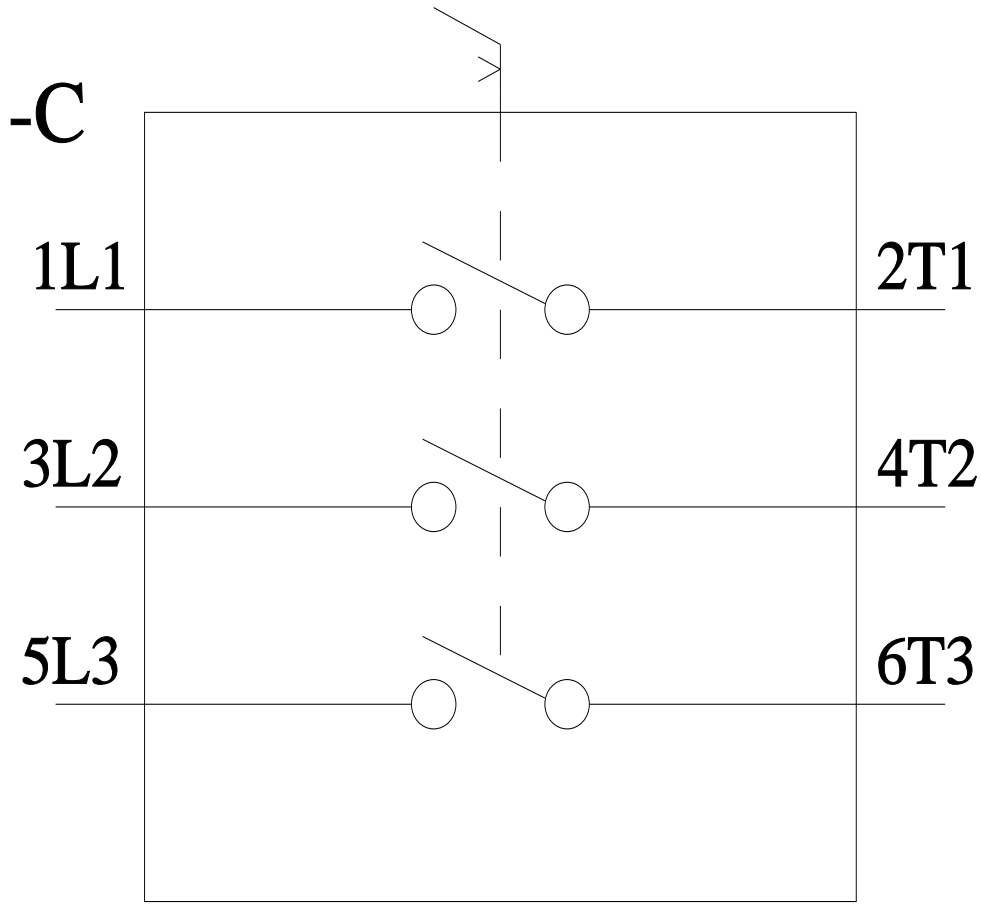

last modified:

10/14/2025 

