



AS-i compact module K60 digital 4 DI, IP67 4 x input, maximum 200 mA 4 x M12 socket Y-II assignment Mounting plate 3RK1901-0CA00 must be ordered separately

General technical data	
design of the product	digital I/O modules for operation in the field, IP67 - K60
Type	4 inputs
design of the slave type	standard slave
I/O configuration	0
ID/ID2 code	1/F
Number I/O sockets	4
type of electrical connection of the inputs and outputs	M12 screw-type terminals
AS interface total current input max	270 mA
operating voltage according to AS-Interface specification	26.5 ... 31.6 V
Ground terminal	PIN5 of each M12 socket is connected to the grounding wrist strap in the mounting plate using a pin
Addressing	front addressing socket
Delivery note	the modules are delivered without mounting plate
Sensor supply	
type of voltage supply for sensor supply	using AS-Interface
input voltage	20 ... 30 V
property of the sensor supply short-circuit and overload resistant	Yes
ampacity of the sensor supply for all inputs	200 mA
<ul style="list-style-type: none"> at ambient temperature 40 °C 	
Inputs	
number of digital inputs	4
type of connection technology	2- and 3-wire technology
Input circuit	PNP transistor
type of voltage of the input voltages	DC
Inputs switching level High min	10 V
input current at digital input	
<ul style="list-style-type: none"> for signal <1> minimum with signal <0> maximum 	
Inputs	
<ul style="list-style-type: none"> sensor supply using AS-Interface socket assignment — PIN 1 — PIN 2 — PIN 3 — PIN 4 — PIN 5 	
design of the pin assignment of the inputs	short-circuit and overload resistant sensor supply L+ data input II sensor supply L- data input I ground terminal
design of the pin assignment of the inputs	Y-II assignment
Outputs	
number of digital outputs	0

Outputs external power supply 24 V DC	not required
design of the pin assignment of the outputs	Y-II assignement
Outputs	
• watchdog	not required

Assignment of the data bits

Assignment of data bits	
• socket	PIN 4 = IN1 (D0), PIN 2 = IN2 (D1)
• socket 2	PIN 4 = IN2 (D1)
• socket 3	PIN 4 = IN3 (D2) , PIN 2 = IN4 (D3)
• socket 4	PIN 4 = IN4 (D3)
• socket 5	not assigned (closed)
• socket 6	not assigned (closed)
• socket 7	not assigned (closed)
• socket 8	not assigned (closed)

Ambient conditions

ambient temperature	
• during operation	-25 ... +85 °C
• during storage	-40 ... +85 °C
protection class IP	IP67

Display

Status display	
• display of I/Os	yellow LED
• display of Uaux	not required
• display of AS-Interface/diagnostics	green/red LED

Mechanical data

width	60 mm
height	152 mm
depth	29 mm
fastening method	standard rail mounting/wall mounting using mounting plate for K60 compact module
shock resistance	15g / 11 ms

Certificates/ approvals

General Product Approval	EMV
--------------------------	-----



[KC](#)

Maritime application



[Confirmation](#)

[Miscellaneous](#)

Environment

[Environmental Con-
firmations](#)



Further information

Information on the packaging
<https://support.industry.siemens.com/cs/ww/en/view/109813875>
 Information for data generation and storage
<https://support.industry.siemens.com/cs/ww/en/view/109995012>
 Information- and Downloadcenter (Catalogs, Brochures,...)
<https://www.siemens.com/ic10>
 Industry Mall (Online ordering system)
<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RK1200-0CQ00-0AA3>

Cax online generator


<https://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RK1200-0CQ00-0AA3>


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RK1200-0CQ00-0AA3>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

https://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RK1200-0CQ00-0AA3&lang=en

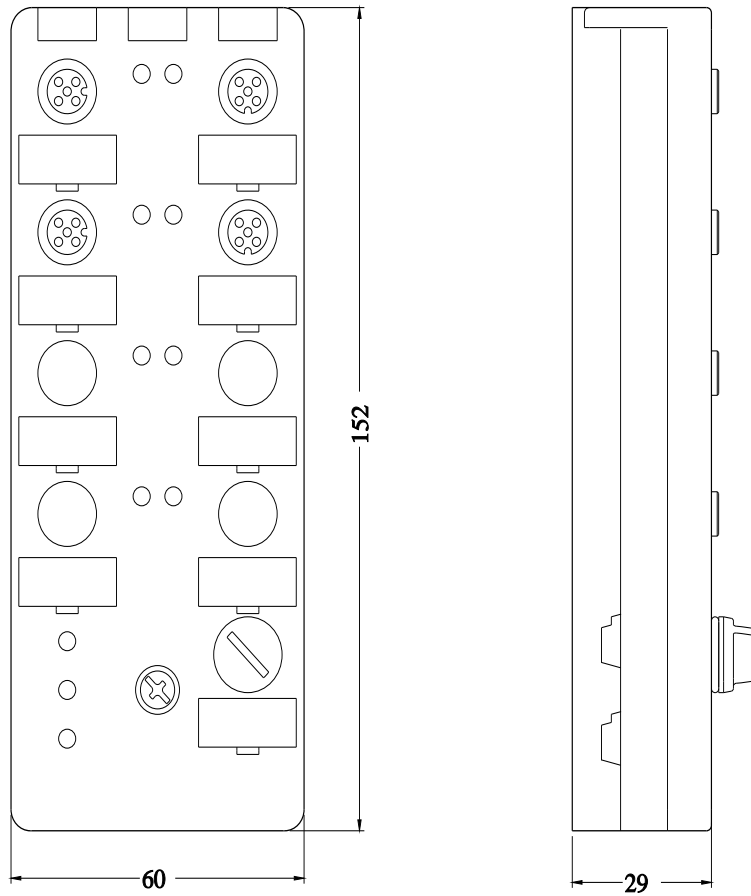

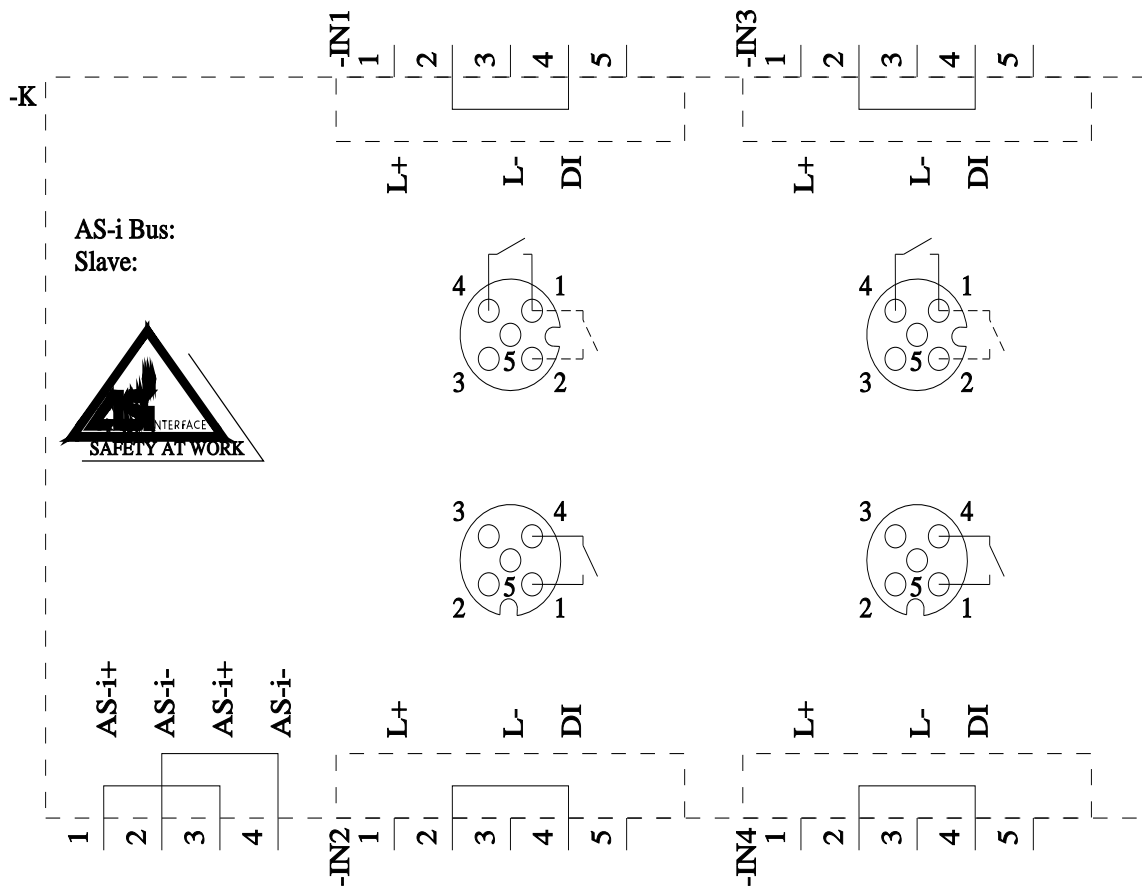

last modified:

4/1/2025