



AS-i ground fault module IP20 S22.5, ground fault monitoring 1 input, remote reset 2 x signaling output, Relay DC-12 1 A / DC-13 500 mA (24 V) Spring-type terminal Overall width 22.5 mm No AS-i address required Only AS-Interface monitoring

General technical data		
design of the product		ground-fault detection modules - modules with special functions
product function		
• ground fault detection		Yes
• counter		No
• overvoltage detection		No
protocol is supported AS-Interface protocol		Yes
type of electrical connection of the inputs and outputs		spring-loaded terminals
AS interface total current input max	mA	40
Earth fault		10% U _{as-i} ≤ U _{gnd} ≤ 90% U _{as-i}
Addressing		the module does not need its own AS-Interface address
Signal range		
• low signal lin max	mA	1.5
• high signal		
— U _{in} min	V	10
— lin min	mA	6
Current carrying capacity		
• DC-12	A	1
• DC-13		
— 24 V	mA	500
— 48 V	mA	200
Operating cycles DC-12		2 000 000
Rated operational voltage DC	V	24 ... 48
Rated temperature	°C	25
AS interface Connection Polarity reversal protection		built-in
Note 1		If repeaters are used, a ground fault detection module must be used for each AS-Interface segment (number of AS-Interface power supply units = number of ground fault detection modules)
Note 2		U _{aux} should be protected by a 2 A slow fuse. The endurance of the relay can be increased if inductive loads are connected using freewheel diodes.
reference code according to DIN 40719 extended according to IEC 204-2 according to IEC 750		A
reference code according to EN 61346-2		K
Ambient conditions		
ambient temperature		
• during operation	°C	-25 ... +70
• during storage	°C	-40 ... +85
protection class IP		IP20
Mechanical data		
width	mm	22.5
height	mm	103

depth	mm	86
fastening method		standard rail mounting/wall mounting
Conductor cross-section		
<ul style="list-style-type: none"> • solid • finely stranded <ul style="list-style-type: none"> — with end sleeve — without end sleeve • AWG solid or stranded 		2 x (0.25 - 1.5) mm ² 2 x (0,25 - 1) mm ² 2 x (0.25 - 1.5) mm ² AWG 2 x (24 - 16) mm ²

Certificates/ approvals

General Product Approval	EMV
--------------------------	-----



EG-Konf.



UL



RCM

[KC](#)

Maritime application	other	Environment
----------------------	-------	-------------



PRS



[Confirmation](#)

[Miscellaneous](#)

[Environmental Confirmations](#)

Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information for data generation and storage

<https://support.industry.siemens.com/cs/ww/en/view/109995012>

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RK1408-8KG00-0AA2>

Cax online generator



<https://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RK1408-8KG00-0AA2>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RK1408-8KG00-0AA2>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

https://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RK1408-8KG00-0AA2&lang=en

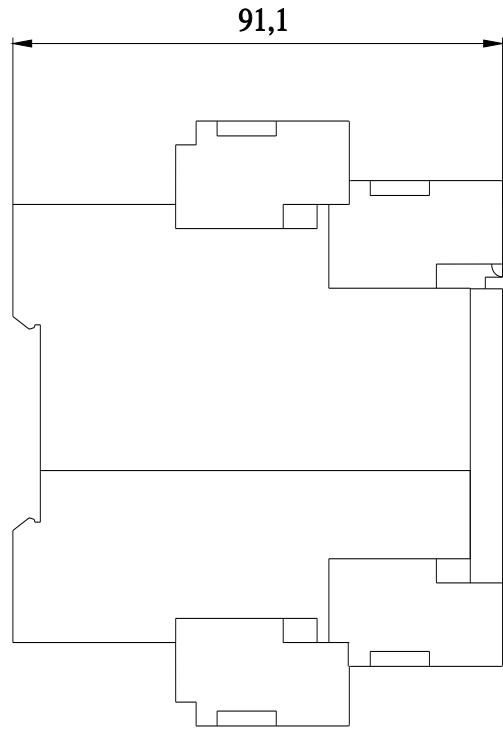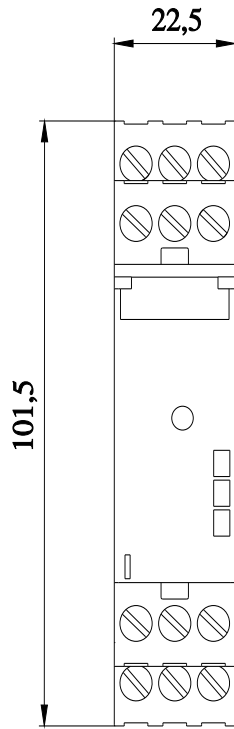

last modified:

4/2/2025 