

Siemens  
EcoTech



LED module with integrated LED, 5 V DC, yellow, solder terminal, for use on printed circuit boards



product brand name	SIRIUS ACT
product designation	LED module
product type designation	3SU1
<b>General technical data</b>	
product component	
• diode	Yes
• lamp transformer	No
• light source	Yes
• series resistor	No
insulation voltage rated value	30 V
degree of pollution	3
type of voltage of the operating voltage	DC
• for actuation	DC
surge voltage resistance rated value	0.8 kV
consumed current maximum	20 mA
protection class IP	
• of the enclosure	IP40
• of the terminal	IP20
shock resistance	
• according to IEC 60068-2-27	sinusoidal half-wave 15g / 11 ms
• for railway applications according to EN 61373	Category 1, Class B
vibration resistance	
• according to IEC 60068-2-6	10 ... 500 Hz: 5g
• for railway applications according to EN 61373	Category 1, Class B
operating period typical	100 000 h
reference code according to IEC 81346-2	P
Substance Prohibitance (Date)	10/01/2014
Weight	3 g
operating voltage 1	
• at DC rated value	5 V
relative positive tolerance of the operating voltage	20 %
relative negative tolerance of the operating voltage	20 %
<b>Control circuit/ Control</b>	
inrush current maximum	0.1 A
<b>Connections/ Terminals</b>	
type of electrical connection	Socket connection (THT)

<b>Lamp</b>	
type of light source	LED
color of the light source	yellow
light intensity	900 ... 1 400 mcd

<b>ATEX</b>	
certificate of suitability	
• ATEX	No
• IECEx	No

<b>Ambient conditions</b>	
ambient temperature	
• during operation	-25 ... +70 °C
• during storage	-40 ... +80 °C
environmental category during operation according to IEC 60721	3M6, 3S2, 3B2, 3K6 (with relative air humidity of 10 ... 95%, no condensation in operation permitted)

<b>Environmental footprint</b>	
Environmental Product Declaration(EPD)	Yes
global warming potential [CO2 eq] total	0.787 kg
global warming potential [CO2 eq] during manufacturing	0.566 kg
global warming potential [CO2 eq] during operation	0.235 kg
global warming potential [CO2 eq] after end of life	-0.015 kg
Siemens Eco Profile (SEP)	Siemens EcoTech

<b>Installation/ mounting/ dimensions</b>	
fastening method	
• of modules and accessories	Printed circuit board
height	8.1 mm
width	8.1 mm
depth	30.6 mm

<b>Approvals Certificates</b>	
General Product Approval	Test Certificates





[Special Test Certificate](#)



[Type Test Certificates/Test Report](#)

Maritime application	other
   	

[Confirmation](#)

<b>Environment</b>	
 	<a href="#">Environmental Confirmations</a>

<b>Further information</b>	
Information on the packaging <a href="https://support.industry.siemens.com/cs/ww/en/view/109813875">https://support.industry.siemens.com/cs/ww/en/view/109813875</a>	
Information for data generation and storage <a href="https://support.industry.siemens.com/cs/ww/en/view/109995012">https://support.industry.siemens.com/cs/ww/en/view/109995012</a>	
Information- and Downloadcenter (Catalogs, Brochures,...) <a href="https://www.siemens.com/ic10">https://www.siemens.com/ic10</a>	
Industry Mall (Online ordering system) <a href="https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3SU1401-3BA30-5AA0">https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3SU1401-3BA30-5AA0</a>	
Cax online generator <a href="https://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&amp;mlfb=3SU1401-3BA30-5AA0">https://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&amp;mlfb=3SU1401-3BA30-5AA0</a>	
Service&Support (Manuals, Certificates, Characteristics, FAQs,...) <a href="https://support.industry.siemens.com/cs/ww/en/ps/3SU1401-3BA30-5AA0">https://support.industry.siemens.com/cs/ww/en/ps/3SU1401-3BA30-5AA0</a>	

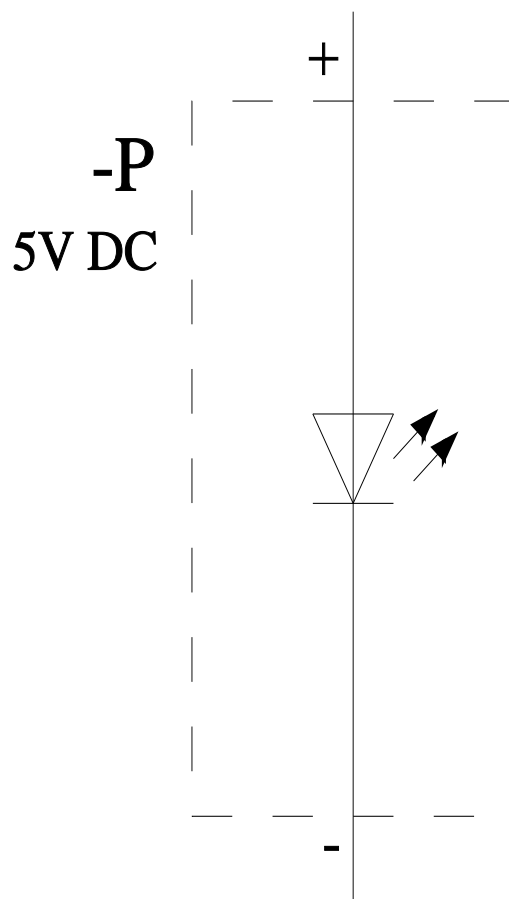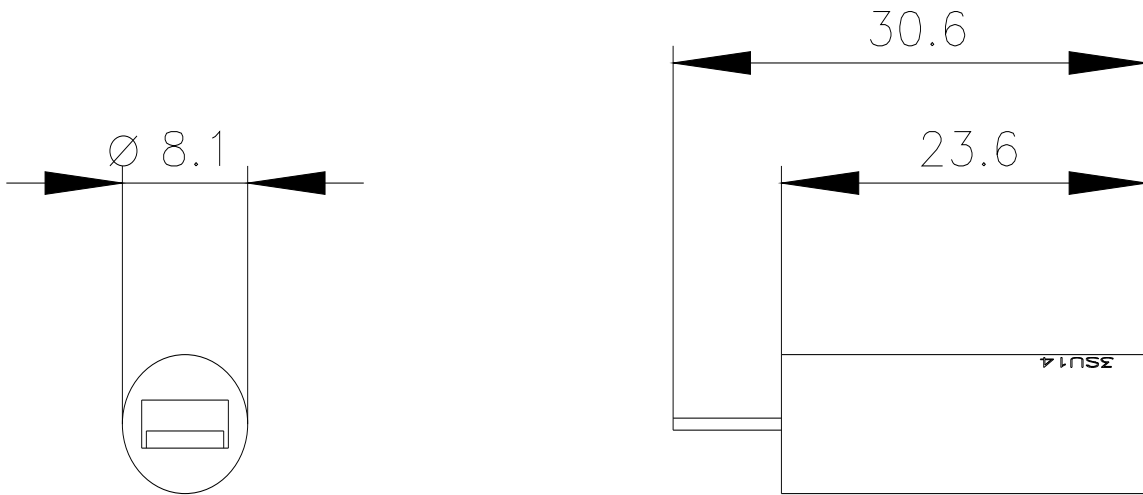

---

last modified:

4/2/2025 